




Z1203-H

ADJUSTABLE HORIZONTAL SIPHON JET HUB & SPIGOT

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

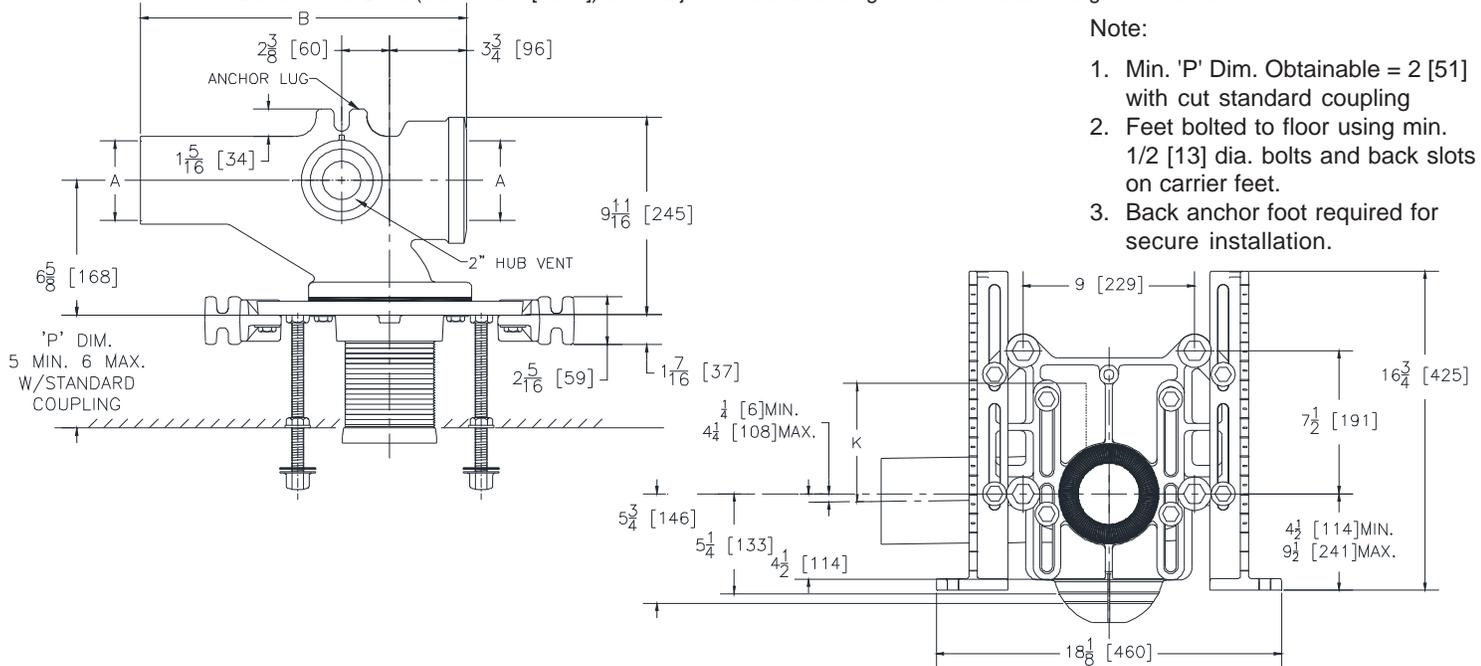

Note:

1. Min. 'P' Dim. Obtainable = 2 [51] with cut standard coupling
2. Feet bolted to floor using min. 1/2 [13] dia. bolts and back slots on carrier feet.
3. Back anchor foot required for secure installation.

Product Number	Dimensions In Inches [mm]				Approx. Wt. Lbs. [kg.]
	A	B	K	N	
Z1203-HL4/HR4	4 [102]	16 [406]	6-1/8 [156]	9-3/4 [248]	75 [34]

ENGINEERING SPECIFICATION: ZURN Z1203-H() Adjustable, horizontal siphon jet water closet "Rigid System" with () size Hub & Spigot connections. Complete with Dura-Coated cast iron right hand or left hand main fitting, with 2" [51mm] vent, adjustable gasketed face plate, universal floor mounted foot supports, corrosion resistant adjustable polymer coupling with integral test cap, fixture bolts, trim, and stud protectors. Rear anchor tie down and bonded "Neo-Seal" gasket.

PRODUCT/DEFINITION

- _____ Z1203-HR4 4 [102] Hub & Spigot, Right Hand Inlet with Flow to Left
- _____ Z1203-HL4 4 [102] Hub & Spigot, Left Hand Inlet with Flow to Right

PREFIXES

- _____ Z D.C.C.I. System with Zurn "ZZ" Adjustable Coupling*
- _____ ZQ D.C.C.I. System with Non-Adjustable Coupling

SUFFIXES

- _____ -A Auxiliary Support Assembly (for 'P' Dim. Greater Than 18 [456])
- _____ -B Blowout Type Fixture Support
- _____ -CC Cast Iron Coupling 6 [152] Long
- _____ -CL Coupling Length Greater Than Standard 12 [304] (Specify length if greater than 6 [152])
- _____ -F Floor Mounted Back Outlet, Fixture Support
- _____ -G Galvanized Cast Iron
- _____ -M Auxiliary Foot Support (for 'P' Dim. 10 - 18 [253 - 456])
- _____ -PF Pre-Fab Foot
- _____ -PS Pre-Fab Slotted Foot
- _____ -RYK Unistrut Pre-Fab Foot
- _____ -VP Vandal Proof Trim
- _____ -X3 3 [76] Carrier Foot Extension
- _____ -X4 4 [102] Carrier Foot Extension
- _____ -45 Finishing Frame for Siphon Jet Closet (for Blowout System Specify -45-B)
- _____ -50 Flush Valve Supply Support for Water Closets

* Regularly furnished unless otherwise specified.