




Z1185 LINT INTERCEPTOR

SPECIFICATION SHEET

TAG _____



Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

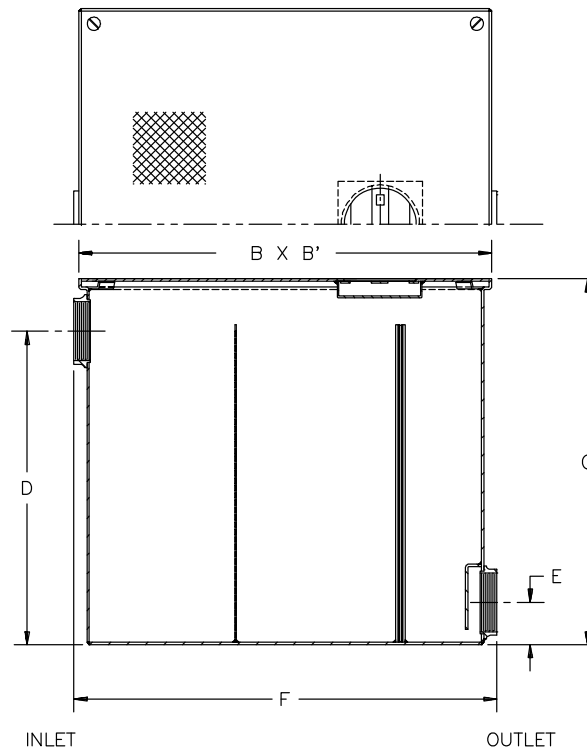

Size No. of Machines	Inlet/Outlet Size**	Flow Rate G.P.M. [LPM]	Approx. Wt. Lbs. [kg]	Dimensions In Inches					
				B	B'	C	D	E	F
3	2 [50]	30 [113]	93 [42]	17 [432]	17 [432]	16-1/2 [419]	13-1/2 [343]	3-1/4 [82]	17-1/4 [438]
7	3 [75]	70 [265]	155 [70]	25 [635]	25 [635]	20 [508]	17 [432]	3-1/4 [82]	25-1/2 [648]
10	4 [100]	100 [378]	271 [123]	33 [838]	33 [838]	28 [711]	25 [635]	4 [102]	34 [864]
20	4 [100]	200 [756]	404 [183]	40 [1016]	40 [1016]	35 [889]	32 [813]	4 [102]	41 [1041]
30	6 [150]	300 [1134]	654 [297]	45 [1143]	45 [1143]	40 [1016]	36 [914]	5 [127]	46 [1168]
40	6 [150]	400 [1512]	723 [328]	48 [1219]	48 [1219]	43 [1092]	39 [991]	5 [127]	49 [1245]
50	6 [150]	500 [1890]	911 [414]	52 [1321]	52 [1321]	47 [1194]	43 [1092]	5 [127]	53 [1346]

ENGINEERING SPECIFICATION: ZURN Z1185

Dura Coated interior and exterior fabricated steel lint interceptor, non-skid secured cover, with aluminum lint intercepting secondary screen assembly and permanent primary straining baffle. Regularly furnished with high inlet and low outlet.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ___ Z Dura Coated Fabricated Steel*
___ ZSS All Type 304 Dura Coated Fabricated Stainless Steel

SUFFIXES

- ___ AR Acid Resistant Epoxy Coated Finish
___ -E Dura Coated interior and exterior fabricated steel extension section
(Specify 'C' dimension required for recessed installation).
___ -RS Stainless Steel Screen Replacement Assembly

REV. A DATE: 9/9/11 C.N. NO. 121883**DWG. NO. 65080****PRODUCT NO. Z1185**

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED