

Model Z5615.441.00.00.00

1.1 GPF Elongated Wall Hung EcoVantage® Manual Flush Valve Toilet System

TAG	

Z5615 HET Series

- Zurn One HET Toilet System designed for optimal performance between Zurn fixture and Zurn flush valve to save water.
- 1.1 gpf (gallons per flush)
- 14% water savings over standard 1.28 gpf system
- 31% water savings over standard 1.6 gpf system
- · Vitreous china
- Elongated front rim
- 2-1/8" fully glazed trapway
- · High efficiency siphon jet flush action
- Zurn product system component compatibility and quality assurance
- Shipping Weight: 47 lbs.



Z5615 Series Elongated (shown with seat)

Suffix Options:

 -RF Retro-Fit Nut Kit for extending carrier studs from existing wall.

Recommended Carrier:

Z1201 or Z1202 EZCarry[™] 500 lbs load rated High Efficiency Carrier

Recommended Trim:

■ Z5955SS-EL Elongated, standard white, open front toilet seat less cover with stainless steel check hinge.

Note: To ensure system performance:

Minimum Running Water Pressure = 25 psi.

Engineering Specification

Z5615.441 EcoVantage® High Efficiency Toilet System -System comes complete with exposed manual Z6000AV-ONE high efficiency flushometer valve and vitreous china wall-hung toilet. The system is designed to perform to industry standards with as little as 1.1 gallons per flush. The EcoVantage® manual valve is an exposed, quiet diaphragm type that is complete with Zurn's AguaVantage® TPE, chloramine resistant, dual seal diaphragm with a clog resistant filtered by-pass. The valve has a non-hold open and no leak handle feature, high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon guard protection. Internal seals are made of chloramine resistant materials. Vitreous china toilet is 1-1/2" top spud with 2-1/8" fully glazed trapway and siphon jet action. Valve and toilet are an engineered system designed to provide optimal performance and 31% water savings over 1.6 gpf conventional toilets.



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.



Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

In Canada - Consult local codes and standards.

EcoVantage® is a registered trademark of Zurn Industries All dimensions and specifications are subject to change without notice.

This space is for Architectural/engineering Approval

Zurn Industries, LLC

5900 Elwin Buchanan Drive, Sanford, NC U.S.A. 27330 · Ph. 1-800-997-3876, Fax 919-775-3541

In Canada | Zurn Industries Limited

7900 Goreway Drive Unit 10, Brampton, Ontario L6T5W6 · Ph. 905-405-8272, Fax 905-405-1292

Rev.

Date: 2/15/2017 C.N. No. SAN007459

Prod. | Dwg. No. 315905




Model Z5615.441.00.00.00

1.1 GPF Elongated Wall Hung EcoVantage® **Manual Flush Valve Toilet System**

TAG

Rough-in dimensions for Z5615 Series

• Z5615.441.00.00.00 with top spud

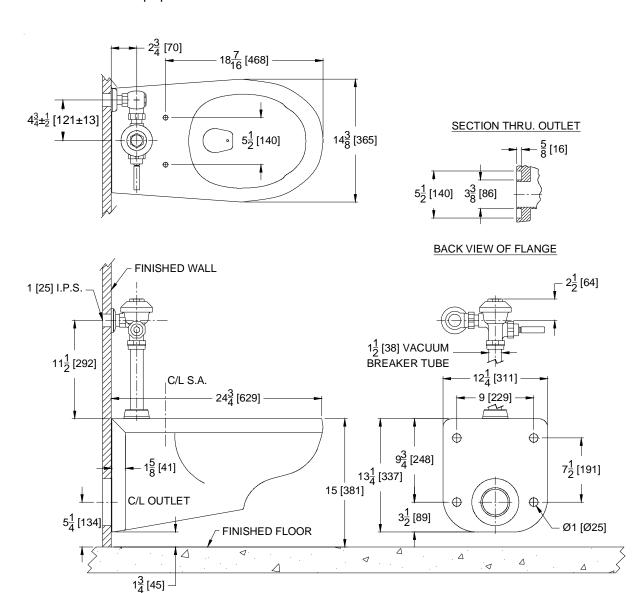

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements. Fixture dimensions meet ANSI/ASME standard A112.19.2

ADA DESIGNED

and CAN/CSA B45 requirements. In Canada - Consult local codes and standards.

EcoVantage® is a registered trademark of Zurn Industries

All dimensions and specifications are subject to change without notice.

Note: For ADA compliance, top of seat height should be installed at 17"-19" from finished floor.

Zurn Industries, LLC

5900 Elwin Buchanan Drive, Sanford, NC U.S.A. 27330 · Ph. 1-800-997-3876, Fax 919-775-3541 In Canada | Zurn Industries Limited

7900 Goreway Drive Unit 10, Brampton, Ontario L6T5W6 · Ph. 905-405-8272, Fax 905-405-1292

Rev.

Date: 2/15/2017 C.N. No. SAN007459

Prod. | Dwg. No. 315905