



# ZE1201-N\_4

ELONGATED BARREL FITTING 38 [965]  
 EZCARRY® ADJUSTABLE HORIZONTAL HIGH PERFORMANCE  
 SIPHON JET NO-HUB WATER CLOSET CARRIER SYSTEM


SPECIFICATION SHEET

TAG \_\_\_\_\_

**PATENT  
 PENDING**

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

### ZE1201-NR4 Illustrated

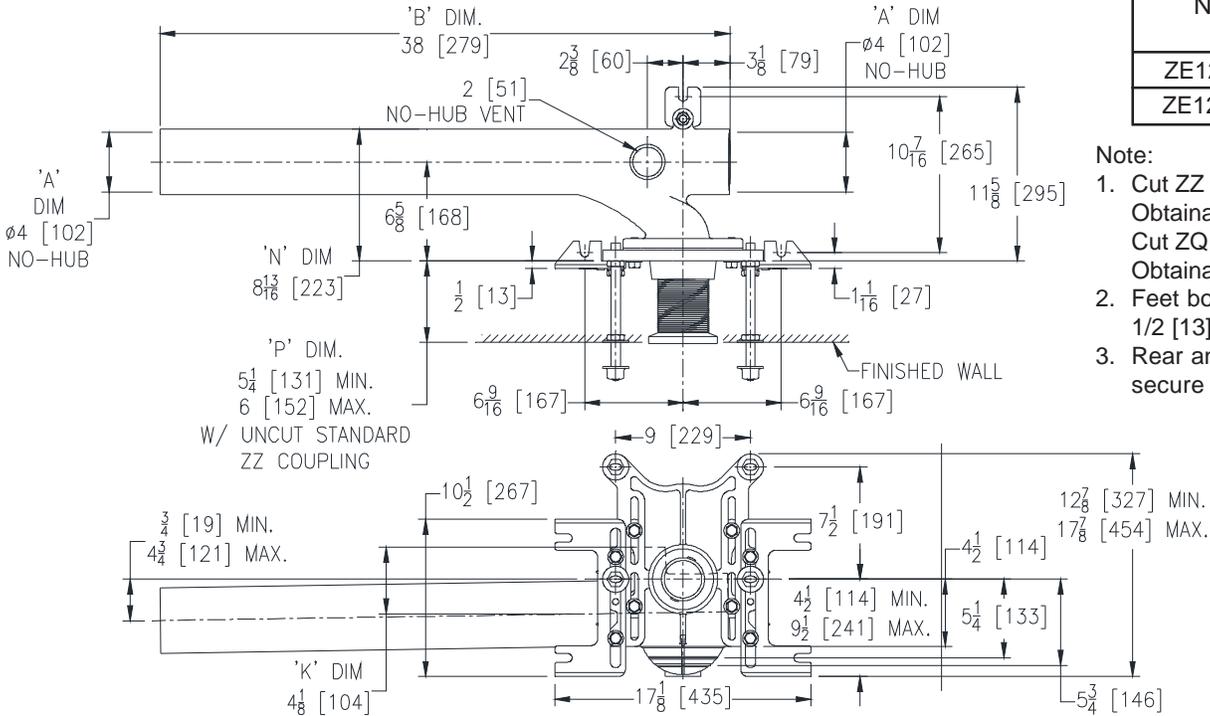

Product Number	Approx. Wt. lbs [kg]
ZE1201-NL4	89 [40]
ZE1201-NR4	

**Note:**

1. Cut ZZ Coupling, Min. 'P' Dim. Obtainable = 2 [51]  
 Cut ZQ Coupling, Min. 'P' Dim. Obtainable = 5 [127]
2. Feet bolted to floor using min. 1/2 [13] dia. anchors.
3. Rear anchor foot required for secure installation.

**ENGINEERING SPECIFICATION: ZURNZE1201-N\_4**

EZCarry® horizontal siphon jet water closet carrier system, with high performance Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep, 4" [102 mm] no-hub connections, 38" [965 mm] barrel for stall to stall direct connection, and extended 2" [51 mm] vent. Corrosion resistant, adjustable 3" [76 mm] dia. X 6" [152 mm] coupling with integral test cap, designed to increase flow velocity and line carry, and labor saving "Neo-Seal" bonded gasket optimizes flow performance while reducing installation steps. Complete system includes an adjustable, gasketed faceplate; universal floor mounted foot supports; heavy-duty 1/2" [13 mm] rear anchor tie down; fixture bolts, trim, and stud protectors. EZCarry® narrow wall system complies with all applicable requirements of ASME A112.6.1M up to a 500 lbs [227 kg] maximum static load.

**OPTIONS** (Check/specify appropriate options)

- \_\_\_ ZE1201-NL4    4 [102] No-Hub Elongated Left Hand Inlet with Flow to Right
- \_\_\_ ZE1201-NR4    4 [102] No-Hub Elongated Right Hand Inlet with Flow to Left

**PREFIXES**

- \_\_\_ ZE    D.C.C.I. System with Zurn ZZ Adjustable Coupling\*
- \_\_\_ ZQE    D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

**SUFFIXES**

- |   |  |
|---|--|
| ___ -A    Auxiliary Support Assembly<br>(For 'P' Dim. Greater than 18 [457])  | ___ -F    Floor Mounted, Back Outlet Fixture Support                         |
| ___ -CC    Corrosion Resistant Cast Iron Coupling<br>(2-1/4 to 12 [57 to 305])  | ___ -G    Galvanized Cast Iron   |
| ___ -CE    EZ-Set™ Coupling (Available 6 [152] , 12 [305] or<br>longer when specified. Minimum length = 5 [127])        | ___ -M    Auxiliary Foot Support<br>(for 'P' Dim. 10 thru 18 [254 thru 457]) |
| ___ -CL    Custom Length Standard Coupling with Integral Test Cap<br>(Specify Length 4, 8, 10, 12 [102, 203, 254, 305]) | ___ -RYK    Unistrut Pre-Fab Foot Support                                    |
| ___ -CS    2-1/4 [57] Polymer Coupling with Integral Test Cap<br>(ZZ Coupling Only)                                     | ___ -RYK17    One Piece Unistrut Pre-Fab Foot                                |
|   | ___ -VP    Vandal-Proof Trim   |
|   | ___ -45    Finishing Frame for Siphon Jet System                             |
|   | ___ -50    Flush Valve Supply Support for Water Closets                      |

\* Regularly furnished unless otherwise specified.