


Z9-PNUT PVDF LOCKING NUT

Engineering Specification:

ASTM-F1673, UL Classified
 ZURN Z9-PNUT LOCKING NUT – Polyvinylidene fluoride locking nut used in both fusion lock and mechanical joint installations.




Model No.	Dimensions in Inches [mm]		
	Nom. Pipe Size	A	B
Z9-PNUT-112	1-1/2 [38]	3-1/32 [77]	13/16 [21]
Z9-PNUT-2	2 [51]	3-15/32 [88]	1 [25]
Z9-PNUT-3	3 [76]	5-21/64 [135]	1-21/64 [34]
Z9-PNUT-4	4 [102]	6-3/8 [162]	1-9/16 [40]

Z9-PPLUG PVDF CLEANOUT PLUG

Engineering Specification:

ASTM-F1673, UL Classified
 ZURN Z9-PPLUG CLEANOUT PLUG – Polyvinylidene fluoride plug used with fitting. No seal required.

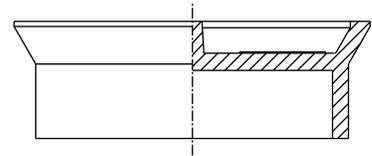

Model No.	Dimensions in Inches [mm]	
	Nom. Pipe Size	
Z9-PPLUG-112	1-1/2 [38]	
Z9-PPLUG-2	2 [51]	
Z9-PPLUG-3	3 [76]	
Z9-PPLUG-4	4 [102]	


Z9A-PFD1 PVDF ADJUSTABLE FLOOR DRAIN

Engineering Specification: ZURN Z9A-PFD1

ADJUSTABLE FLOOR DRAIN – Polyvinylidene fluoride body with bottom outlet and adjustable stainless steel strainer.

Options:

-F Fusion Lock; -M Mechanical Seal; -S Stab•Lock Seal



Model No.	Dimensions in Inches [mm]				
	Nom. Pipe Size	øA	D	C	
				Min.	Max.
Z9A-PFD1-3	3 [76]	5-3/16 [132]	3-19/32 [91]	1 [25]	1-1/2 [38]
Z9A-PFD1-4	4 [102]	5-3/16 [132]	3-11/16 [94]	1 [25]	1-1/2 [38]

Options	Description
-FN	4" [102] Round Stainless Steel Funnel
-VP	Vandal Proof

PVDF