

**Without A Doubt, Wilkins Has
The Most Comprehensive Line Of
Pressure Control Valves For
Fire Sprinkler Systems.**

**Now There Are
Two More!**

THE NEW PRESSURE-TRU
ZW4000/4004
SERIES

Fire Hose Valve & Automatic Fire Control Valve

Sizes: 2 1/2"

Rated up to 400 psi inlet pressure
Factory set to your specifications
Serviceable in-line

ZW4000
Fire Hose Valve

- Features female NPT or grooved inlet x male hose thread outlet
- In-line serviceable
- Available in angle or in-line (globe) configurations
- Special hose threads available as an option
- Check with factory for approvals and availability

ZW4004
Automatic Fire Control Valve

- Features open-close indicating feature
- Designed for flows up to 500GPM
- 2 1/2" Female NPT or grooved inlet and outlet connections
- Available in angle or in-line (globe) configurations
- In-line serviceable
- Available in rough chrome finish

WILKINS
a **ZURN** company

Customer Service Representatives are available Monday through Friday
5:30 am to 5:00 pm PST. Call 877-222-5356 or 805-226-6297,
info@zurnwilkins.com or visit us online at www.zurn.com





FEATURES

Sizes: □ 2 1/2"

Maximum inlet pressure

End connections (FNPT)
(Grooved)

Manufactured in the USA

Factory Set

400 psi

ANSI B1.20.1

AWWA C606

OPTIONS

(Suffixes can be combined)

- - angle type valve
- IL - in-line (globe type) valve
- G - with grooved inlet and outlet connections
- MSA - with monitor switch adapter
- CAP - with capped bonnet, no handwheel assembly
- CH - with chrome finish
- SPECIFY - tapped & plugged inlet and outlet for pressure gauge (not available on angle grooved body)

APPLICATION

The Pressure-Tru™ ZW4004 Series Pressure Reducing Valve is listed as a floor control valve in automatic sprinkler systems as well as a standpipe valve for CLASS I and CLASS III systems. Regulates pressure under both FLOW and NO-FLOW conditions.


STANDARDS COMPLIANCE

- UL® Listed
- C-UL® Listed
- NYC MEA 325-06-E

MATERIAL

Castings/internals
Elastomers

Cast bronze ASTM B 584
Buna Nitrile (FDA approved)
EPDM (FDA approved)

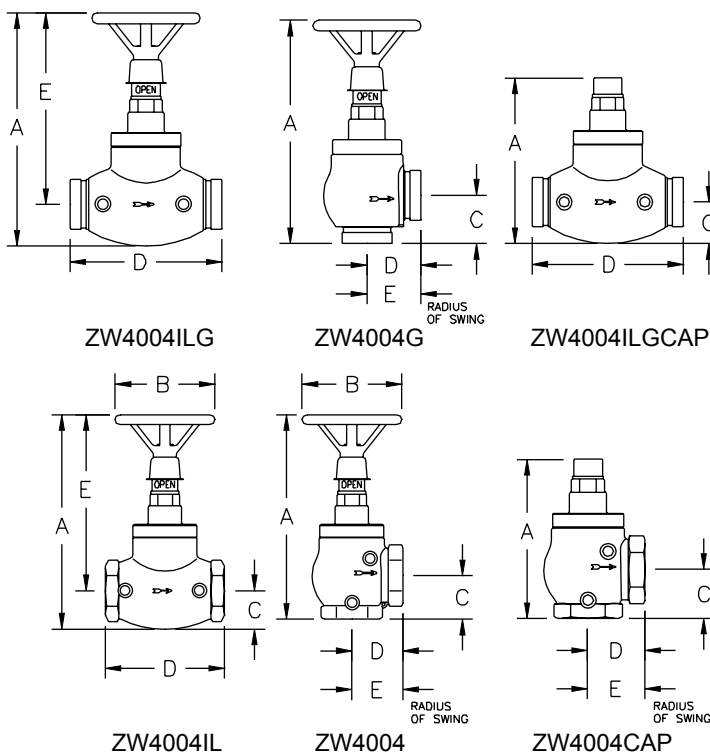

DIMENSIONS & WEIGHTS (do not include pkg.)

MODEL	DIMENSIONS (approximate)													
	A OPEN		A CLOSED		B		C		D		E Radius of Swing		WEIGHT	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs	kg
ZW4004	12 7/8	327	12	305	6 1/4	159	2 3/4	70	3 3/16	92	3 5/8	92	20	9
ZW4004IL	13 1/2	343	12 1/2	318	6 1/4	159	2 3/8	60	7 1/2	191	8 3/16	208	24	11
ZW4004G	12 7/8	327	12	305	6 1/4	159	2 3/4	70	3 3/16	81	3 5/8	92	19	8.6
ZW4004ILG	13 1/2	343	12 1/2	318	6 1/4	159	2 3/8	60	8 3/4	222	8 3/16	208	24	11
ZW4004CAP	9	229	n/a	n/a	n/a	n/a	2 3/4	70	3 3/16	81	3 5/8	92	16	7
ZW4004ILCAP	7 1/4	184	n/a	n/a	n/a	n/a	2 3/8	60	7 1/2	191	7 1/4	184	20	9