



# ZP6800 Series

Concealed Piezo-Activated Flushometer for Penal Fixtures



## Features and Benefits


- New construction – 1.28 gpf and 1.6 gpf applications
- Retrofit up to 3.5 gpf valves on existing fixtures
- Standard rough-in for simplified installation
- 1-hour lock-out feature prevents excessive flushing and flooding
- 96-hour trap seal courtesy flush
- Hardwire and battery powered options available:
  - 3-year alkaline battery life
  - 10-year lithium battery life
- Piezoelectric push-button operation
- Solenoid activated
- Piston-operated for precise and consistent performance per flush
- True mechanical override button allows remote flushing
- 3-year warranty

855-ONE-ZURN  
zurn.com



# ZP6800

## Concealed Piezo-Activated Flushometer for Penal Fixtures

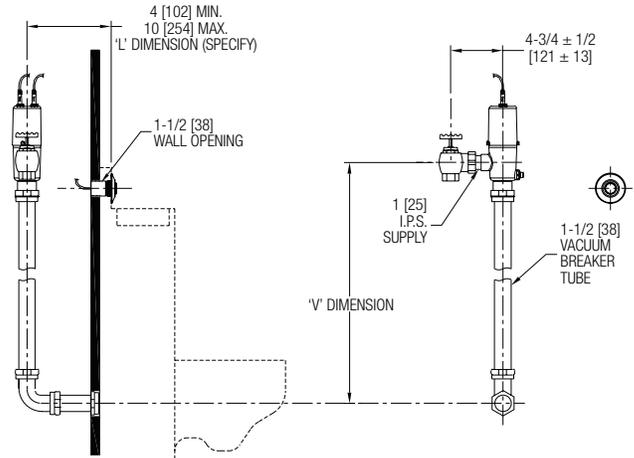

### ENGINEERING SPECIFICATIONS:

- New construction and retrofit penal applications
  - Integrates with stainless steel water closets and combination fixtures, such as Acorn®, Bradley®, Metcraft®, Willoughy®, and similar fixtures
- Proprietary DR-resistant, low-lead brass alloy
- Filtered Piston Kit and Internal Seals made from cholramine-resistant compounds
- Flush activation via piezoelectric push-button switch
  - Manual override button for remote flushing
- Waterproof stainless steel button is vandal and chemical resistant
  - Button fits standard 1" diameter "D" style holes
- Stainless steel escutcheon for wall opening up to 1-1/2" diameter
- 10' power supply cables for hard-wired valves
- IP67-rated, color-coded connectors for simplified installation
- Vacuum Breaker rated for high back pressure with one-piece hex coupling nut
- Adjustable tailpiece
- Control stop equipped with internal siphon-guard protection
  - Sweat solder kit
- Spud coupling and flange for back spud connection

### ACCESSORIES (ORDER SEPARATELY AS SPECIFIED)

<b>P6800-ACT</b>	AC Transformer
<b>P6800-PC6</b>	7.6 VDC Plug-In Power Converter
<b>P6000-HW6</b>	7.6 VDC Hardwired Power Converter
<b>P6800-PJB</b>	Power Junction Box
<b>P6800-EXT</b>	10' Extension Cable with Connectors


### FLOW OPTIONS (MUST SELECT)

- HET-NES**                      1.28 gpf (4.8 lpf) High Efficiency Flush
- WSI**                                1.60 gpf (6.0 lpf) Low Consumption Flush

### POWER OPTIONS (MUST SELECT)

- AC**                                24 VAC 60HZ
- DC**                                7.6 VDC
- BATT**                            Alkaline Battery (3-yr)
- LL**                                Lithium Battery (10-yr)

### ORDERING SCHEME

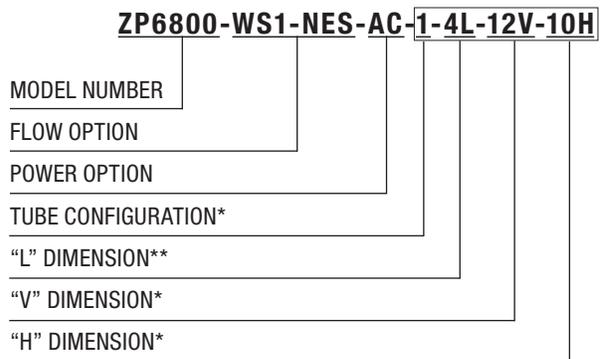

\* See "Tube Configuration Reference Guide" for details

\*\* "L" Dimension = Wall thickness + 3"

**ZURN INDUSTRIES, LLC COMMERCIAL BRASS**  
 5900 ELWIN BUCHANAN DRIVE, SANFORD NC 27330,  
 PHONE: 855-ONE-ZURN (855-663-9876) FAX: 919-775-3541  
 www.zurn.com

In Canada: **ZURN INDUSTRIES LIMITED**  
 3544 NASHUA DRIVE, MISSISSAUGA, ONTARIO L4V 1L2,  
 PHONE: 905-405-8272, FAX: 905-405-1292