



# Z-Bite™ Push-to-Connect Fittings

Reliable tool-free connections

## Labor Saving


- Push connection allows for faster installation and repairs, resulting in less down time of a building's water system
- Stainless steel grip ring provides secure hold on tubing without need for soldering, crimping, or gluing
- Reliable EPDM o-ring provides leak-free 360 degree seal

## Proven

- Dependable ASSE 1061 push type fittings meet plumbing code requirements for potable applications
- Torchless sealing method provides safer installation and allows installation without draining piping
- NSF 61 Certified lead-free fittings, meet national regulations

## Versatility

- Z-Bite universal design allows use with PEX, copper, and CPVC
- Release collar permits easy repositioning and removal aligning with retrofit or temporary applications

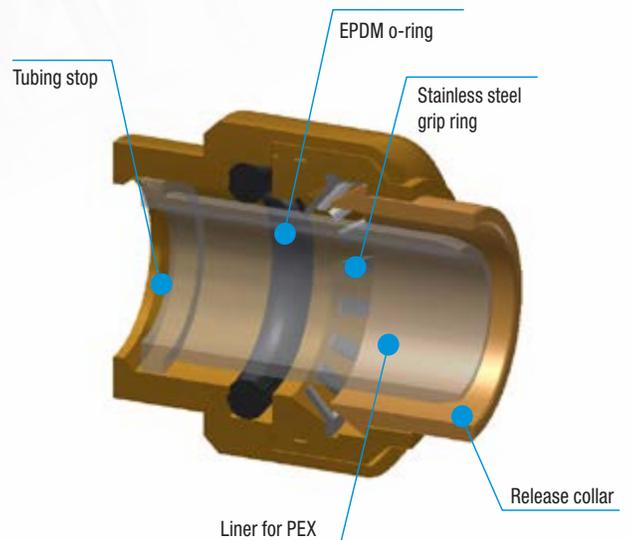


Z-Bite Tee, QZBTE\_G



Z-Bite Elbow, Push x Male Thread, QZBEA\_TG



# Z-Bite™ Push-to-Connect Fittings

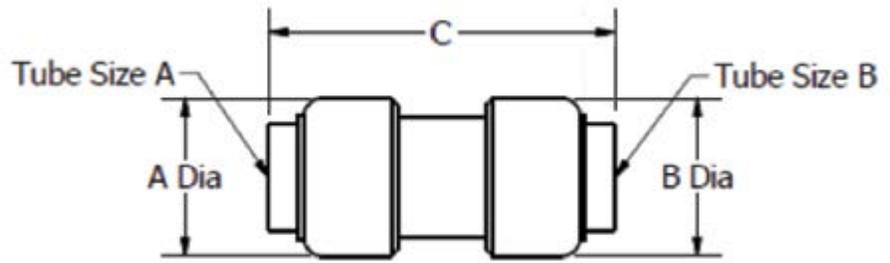

## ENGINEERING SPECIFICATIONS

Zurn Z-Bite Fittings are certified by IAPMO to meet the requirements of ASSE 1061 for Push Fit Fittings, NSF Standard 61 for potable water applications and NSF Standard 372 for low lead. The fittings may be used with PEX, CPVC or copper tube in copper tube sizes. The fittings comply with the requirements of the model plumbing codes for use in inaccessible locations. The grip ring is made from Type 304 stainless steel, the O-ring is a chloramine resistant EPDM and the integral tube stiffener for PEX is made from polysulfone. The brass body of the fitting is C46500 alloy.

Part Number	Description	A Dia (Inches)	Tube A Size (Inches)	B Dia (Inches)	Tube B Size (Inches)	C (Inches)	Bag Qty.	Carton Qty.
QQZBC22G	Coupling - 3/8" Z-Bite	0.87	3/8	0.87	3/8	1.78	6	120
QQZBC23G	Coupling - 3/8" Z-Bite X 1/2" Z-Bite	0.87	3/8	1.07	1/2	1.92	6	120
QQZBC33G	Coupling - 1/2" Z-Bite	1.07	1/2	1.07	1/2	1.94	12	120
QQZBC43G	Coupling - 3/4" Z-Bite X 1/2" Z-Bite	1.35	3/4	1.07	1/2	2.11	12	60
QQZBC44G	Coupling - 3/4" Z-Bite	1.35	3/4	1.35	3/4	2.28	12	60
QQZBC54G	Coupling - 1" Z-Bite X 3/4" Z-Bite	1.66	1	1.35	3/4	2.47	6	30
QQZBC55G	Coupling - 1" Z-Bite	1.66	1	1.66	1	2.55	6	30

## AVAILABLE Z-BITE FITTING TYPES

QQZBCAP_G	Cap
QQZBC__G	Coupling
QQZBDE__G	Drop Ear Elbow
QQZBE__G	Elbow
QQZBEA__FG	Elbow, Push x Female Thread
QQZBEA__TG	Elbow, Push x Male Thread
QQZBUFC__G	Female Adapter
QQZBMC__G	Male Adapters
QQZBC__G	Reducing Coupling
QQZBE__G	Reducing Elbow
QQZBUFC__G	Reducing Female Adapter
QQZBMC__G	Reducing Male Adapter
QQZBT__G	Reducing Tee
QQZBSC__G	Slip Coupling
QQZBT__G	Tee
QQZBC__CG	Transition Coupling, Polybutylene x PEX Coupling

## ACCESSORIES

QQZBDC2	3/8" Disconnect Clip
QQZBDC3	1/2" Disconnect Clip
QQZBDC4	3/4" Disconnect Clip
QQZBDC5	1" Disconnect Clip
QQZBDBT	Depth Gage & Deburring Tool, 3/8", 1/2", 3/4", 1"