


GENERAL PRODUCT ILLUSTRATION Z1217

WALL URINAL/SERVICE SINK COUPLING TYPE SYSTEM

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

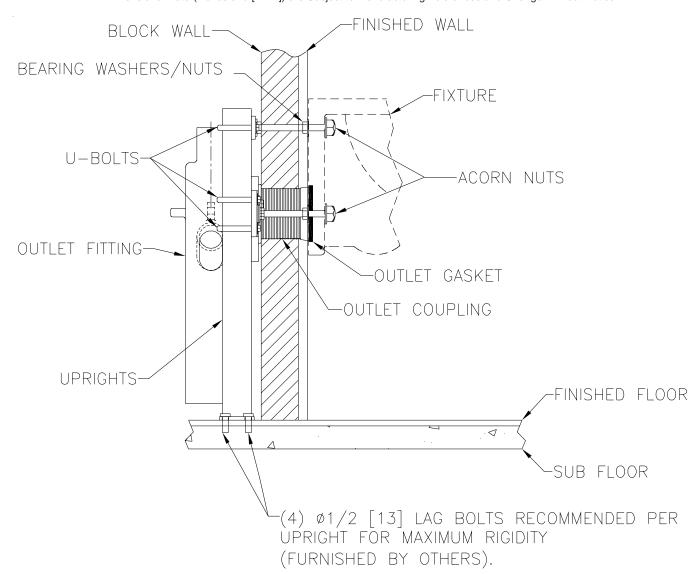

Z1217 WALL URINAL/SERVICE SINK COUPLING TYPE SYSTEM

Installed behind a block wall. Bolt outlet fitting to face plate, place outlet coupling through large hole in face plate. Thread outlet coupling after inserting O-ring and applying lubricant into outlet fitting. Fixture is placed over four threaded studs and fitted tightly to the bearing nuts and washers spaced 1/8 [3] ahead of finished wall. Fixture is fastened utilizing the same studs and four acorn nuts. Adhere outlet gasket to outlet coupling, thread outlet coupling outwards until contact with fixture to complete seal.

Form # C39 Date: 6/20/08 C.N. No. 98648 Rev.