




Z160 TYPICAL INSTALLATION 135° SCUPPER DRAIN

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

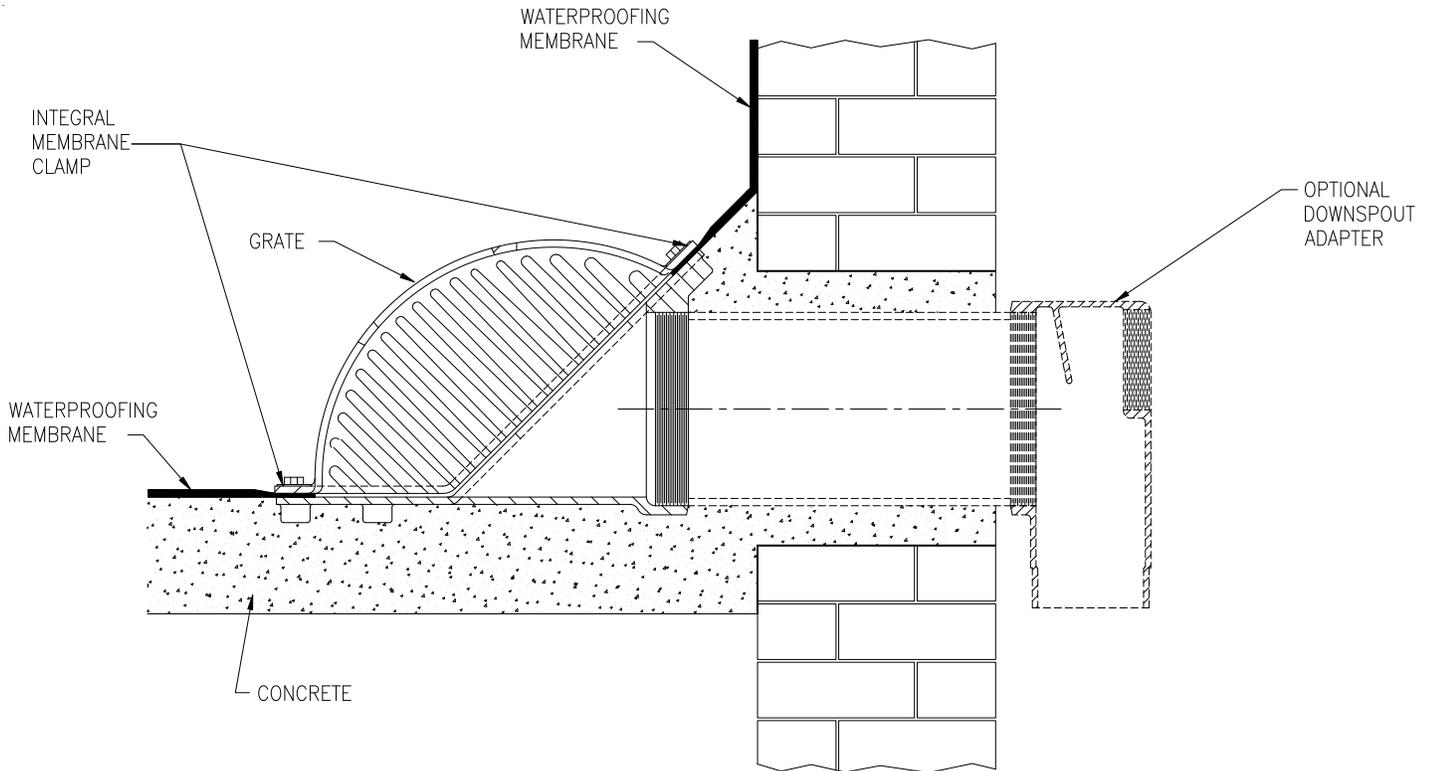

Z160 SCUPPER DRAIN

Drain is illustrated with regularly furnished plain bronze grate with integral membrane clamp. The Zurn scupper drain can be installed in most roof construction. Dimensional data is shown in the Engineering Handbook and on the Zurn submittal drawings. The drain body is secured to the pipe by a threaded connection. The waterproofing membrane is to run up to and over the clamping flange area. The grate with integral membrane clamp is then placed on the drain and then secured. The design and method used for the installation of roofing materials is by others. For other available scupper drains, see Z161, Z187 & Z189.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
⚠ ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov
⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. A
Date: 6/1/2018
C.N. No. 140093
Form No. FD97