




Z185 TYPICAL INSTALLATION FOR CORNICE DRAIN

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

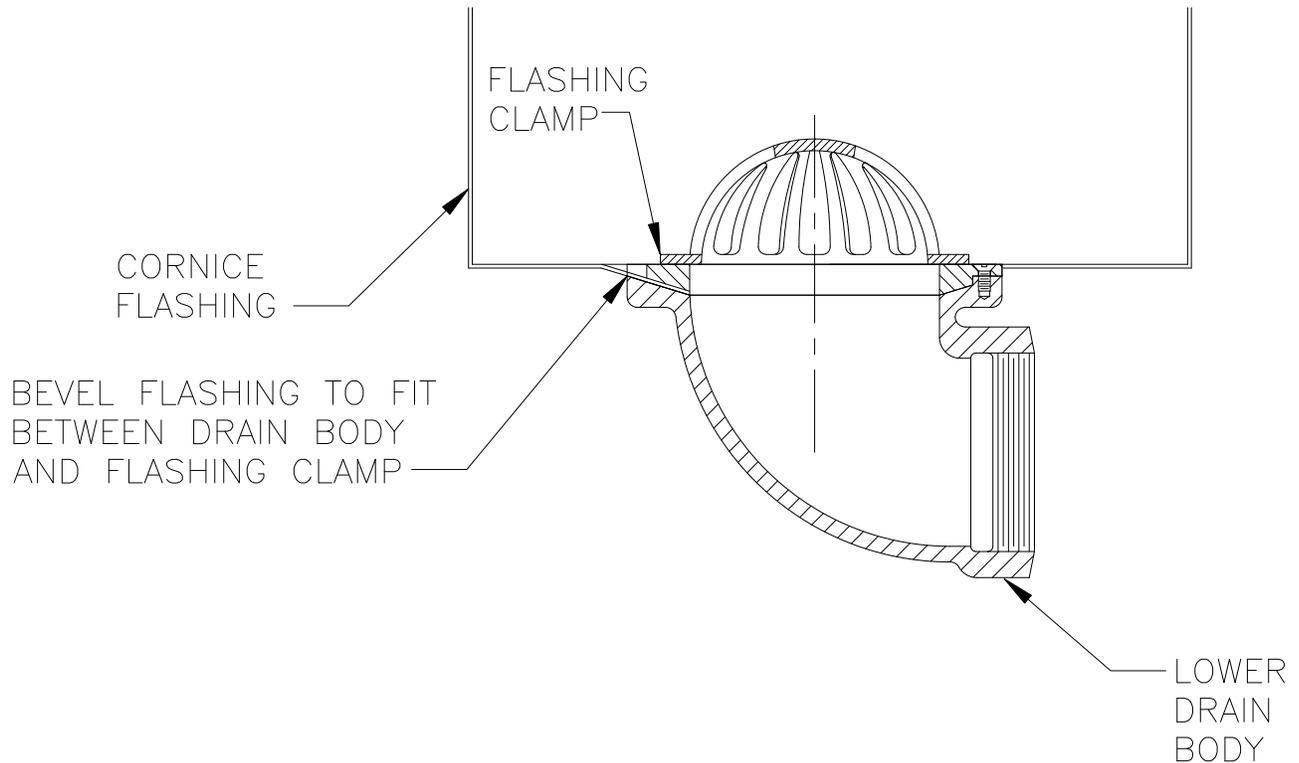

Z185 CORNICE DRAIN INSTALLED

This 6 [102] diameter cornice drain is complete with clamping collar and available with 2 [51] or 5 3/4 [146] high dome. To ensure a water tight connection, it is recommended that a sealant be used between drain body mating parts and cornice flashing.

For a cornice drain with straight outlet, see Z181.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov
⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov
⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. A
Date: 6/1/2018
C.N. No. 140093
Form No. RD98