

MODEL ZW209Q - Pressure Reducing Valve with Downstream Surge Protection



Control Valve Order Form

Customer:	Date:
Contact:	Email:
Telephone/Fax:	Ref. P. O.

Required Valve Information

Quantity: _____

Size: (Check one) 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 6" 8" 10" 12" 14" 16"

Caution: The recommended installation orientation for ACVs is horizontal, with the valve cover up. 6" and larger valves should only be installed horizontally, with the valve cover up, due to the difficulty of properly bleeding air out of the cover and performing maintenance on valves installed in the vertical orientation.

Function Options:

- Check all that apply
- "C" Option * - Check Valve with Isolation Valve
 - "L" Option * - Closing Speed Control
 - "O" Option * - Opening Speed Control (Standard on 4" or smaller)


Valve body is ductile iron, epoxy coated

Body Options:

- Check one
- Standard - Full Port Globe Body
 - "A" Option - Angle Style Body (1-1/4" - 10")
 - "R" Option - Reduced Port Body (3" - 10" Flanged only)

End Connections:

- Check one
- Standard - ANSI Class 150 Flanges (1-1/2" - 16")
 - "G" Option - IPS Grooved (1-1/2" - 10")
 - "TH" Option - NPT Threaded (1-1/4" - 3")
 - "Y" Option * - ANSI Class 300 Flanges (1-1/2" - 16")

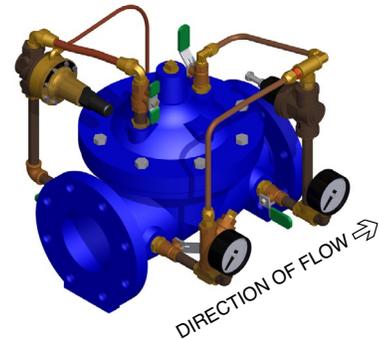

Main Valve Options:

- Check all that apply
- Standard - Stainless Steel Seat, Seal Ring Retainer, and Stem Guide
 - "V" Option * - Viton Rubber Internals, Rated 180°F (only available on 1-1/4" - 6", must combine with "LP" or "HP" Option)
 - "Z" Option *1 - Visual Position Indicator
 - "SO" Option *1 - Limit Switch Open Trip
 - "SC" Option *1 - Limit Switch Closed Trip
 - "SD" Option *1 - Limit Switch Dual Trip

Pilot Options:

- Check all that apply
- Standard - Isolation Valves, Inlet and Outlet Pressure Gauges, and "Wye" Type Strainer
-
- Check one
- Standard - PRXL Pilot (15 - 120 psi Pressure Reducing), PV-RLF (35 - 200 psi Surge Protection)
 - "LP" Option * - PV-PRD Pilot (5 - 25 psi Pressure Reducing)
PV-RLF (10 - 35 psi Surge Protection)
 - "HP" Option * - PV-PRD Pilot (30 - 300 psi Pressure Reducing)
PV-RLF (150 - 300 psi Surge Protection)
-
- Check all that apply
- Standard - Copper Tubing and Brass Fittings
 - "SP" Option * - All Stainless Steel Pilotry (replaces all Brass Fitting, Pilot Valve & Copper Tubing. "GL" Option included)
 - "SH" Option * - Stainless Steel Braided Hoses (only replaces Copper Tubing)
-
- Check all that apply
- "RV" Option * - Pilots Installed on Reverse Side
 - "GL" Option * - Liquid Filled Pressure Gauge

*Adder to standard price applies

¹Limit switch and position indicator options cannot be combined

1747 Commerce Way
Paso Robles, CA 93446
Phone: 855-663-9876
Fax: 805-237-7197

Customer Service Representatives available
Monday through Friday 5:30 a.m. to 5:00 p.m., PST
Fax completed forms to 805-237-7197, attention: Sales
Call 855-663-9876, wilkinscs@zurn.com
or visit us online at www.zurn.com

