


Concealed Z6152 Model

for Water Closets



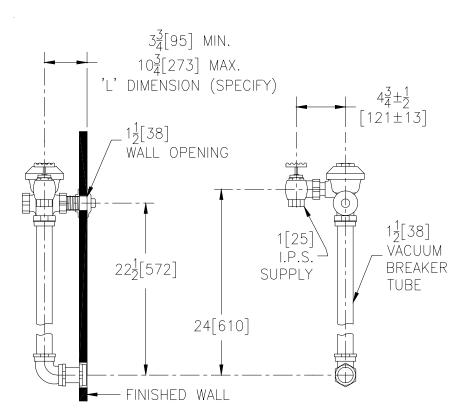

Flow Options

☐ -WS1 1.6 Gal. Low Consumption

☐ -FF 4.5 Gal. Full Flush
☐ Standard Flush 3.5 Gallons Per Flush

Suffix Options (Check/Specify Appropriate Options)

-BG BioCare ADA Handle

____ **-J** Metal Oscillating ADA Handle -L3 3" [76] Metal Push Button

_____ -L3 5 [70] Wetain us

____ -YB Sweat Solder Kit

Other

ENGINEERING SPECIFICATION: ZURN Z6152 Aquaflush Concealed Closet Flush Valve - Concealed, quiet diaphragm-type rough brass flushometer valve with chloramine resistant, dual seal diaphragm with a clog resistant by-pass. Complete with a non-hold open and no leak push button feature, high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, flush tube, elbow flush connection and spud coupling for back spud connection. Control stop has internal siphon-guard protection. Internal seals are made of chloramine resistant materials.

This space is for Architectural/engineering Approval

ZURN INDUSTRIES, INC. ◆ COMMERCIAL BRASS OPERATION ◆ 5900 ELWIN BUCHANAN DRIVE ◆ SANFORD NC 27330
Phone: 1-800-997-3876 ◆ Fax: 919-775-3541 ◆ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ◆ 3544 Nashua Drive ◆ Mississauga, Ontario L4V1L2 ◆ Phone: 905-405-8272 Fax: 905-405-1292