




Z1217
COUPLING TYPE SYSTEM
WALL URINAL / SERVICE SINK

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

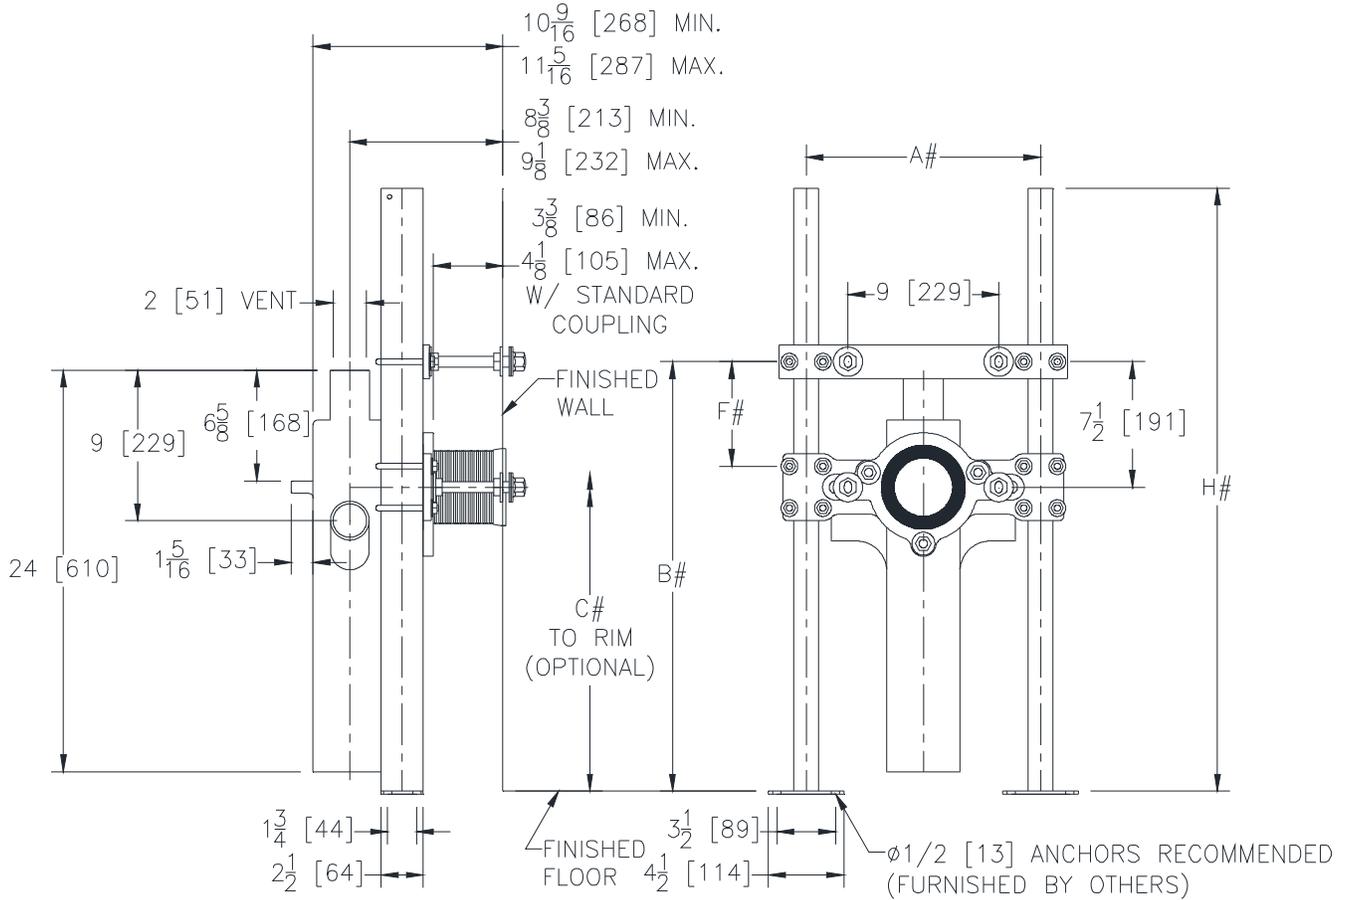

REFER TO ROUGH-IN GUIDE OF SPECIFIC FIXTURE FOR DIMENSION

Product No.	Outlet In [mm]	Approx. Wt. Lbs. [kg]
Z1217	4[102]	63[29]

ENGINEERING SPECIFICATION: ZURN Z1217

Service sink support system with fitting. Complete with Dura-Coated rectangular steel uprights with welded feet, adjustable face plate and upper support plate, Z1208 fitting with 2" [51mm] vent, corrosion resistant adjustable ABS coupling with internal test cap, fixture bolts, trim and bonded "Neo-Seal" gasket .

OPTIONS (Check/specify appropriate options)

PREFIXES

___ Z D.C.C.I. System with "ZZ" Coupling*

SUFFIXES

- ___ -B Blow Out Type Fixture Support
- ___ -CC Corrosion Resistant 6 [152] Long Cast Iron Coupling
- ___ -CL Coupling Length Greater than 6[152] (Specify Length Required)
- ___ -F4 Z1208 Fitting with 4[102] Vent
- ___ -F32 3 [76] Z1208 Fitting w/ 2 [102] vent
- ___ -VP Vandal Proof Trim
- ___ -WS Wall Support Valve Plate
(Specify Knee or Foot Action Valve Name and Number)

* Regularly furnished unless otherwise specified.