





Z1390
POST HYDRANT
 Exposed Head, Non-Freeze

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

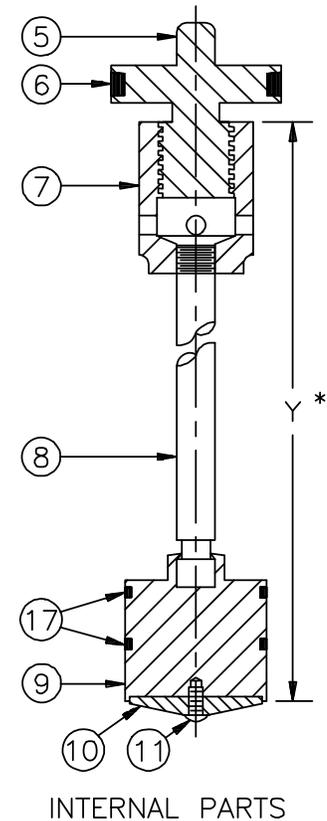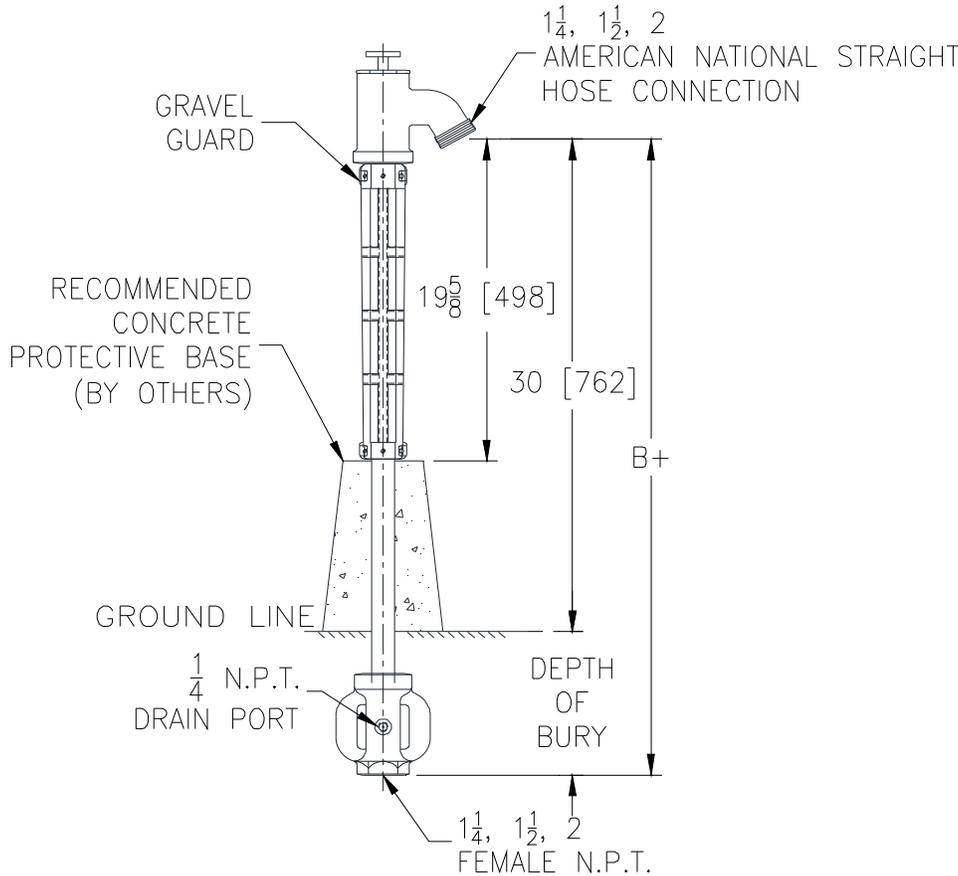

Depth of Bury Feet[mm]	B+ Dim. Feet[mm]	Approx. Wt. Lbs. [kg]
3 [914]	5 1/2 [1676]	62 [28]
4 [1219]	6 1/2 [1981]	67 [30]
5 [1524]	7 1/2 [2286]	72 [33]
6 [1829]	8 1/2 [2591]	77 [35]
8 [2438]	10 1/2 [3200]	87 [39]

ENGINEERING SPECIFICATION: ZURN Z1390

Exposed, non-freeze post hydrant. Complete with galvanized steel casing and cast aluminum casing guard, all bronze interior parts, bronze seat and replaceable seat washer, and non-turning operating rod with free-floating compression closure valve with 1-1/4", 1-1/2" or 2" connection.

"T" handle operating key included. Hydrant is equipped with a tapped 1/4" N.P.T. drain port in valve housing.

Note:

- 'B' dim. based on outlet connection 30 [762] above ground.
- IMPORTANT** Hydrant must be opened one turn minimum to seal drain port during use.

CONNECTION TYPE:

- _____ 1-1/4" Hose Connection
- _____ 1-1/2" Hose Connection
- _____ 2" Hose Connection

OPTIONS (Check/specify appropriate options)

SUFFIXES

- _____ -RK Hydrant Parts Repair Kit
- _____ -WH Wheel Handle

PARTS LIST

Item	Name	Quan.
5	Operating Screw	1
6	O-Ring	1
7	Operating Coupling	1
8	Operating Rod	1
9	Washer Guide	1
10	Washer (neoprene)	1
11	Screw	1
17	O-Ring	2

* Regularly furnished unless otherwise specified.