


**ZCF130****Ø8 [203] CONTROL-FLO ROOF DRAIN****SPECIFICATION SHEET****TAG** \_\_\_\_\_

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

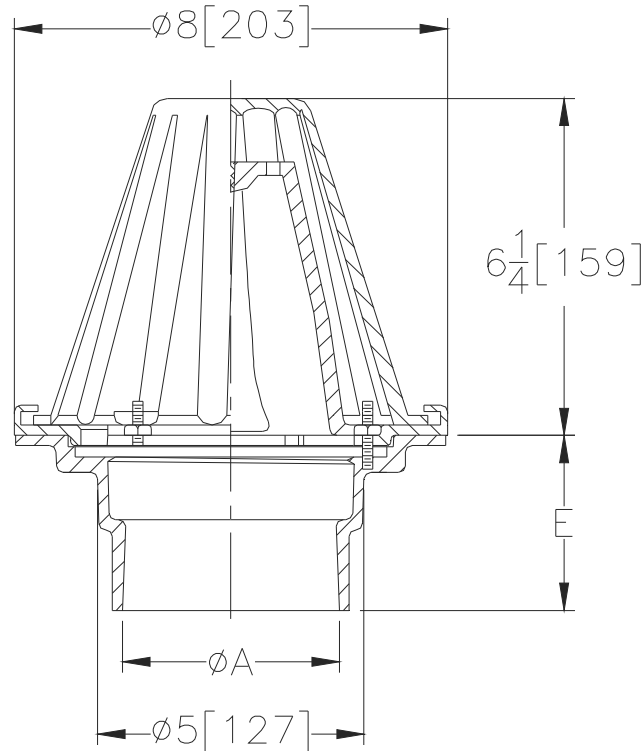

| A<br>Pipe Size<br>Inches / [mm] | Approx.<br>Wt.<br>Lbs. / [kg] | Dome<br>Open Area<br>Sq. In / [sq cm] |
|---------------------------------|-------------------------------|---------------------------------------|
| 2,3,4<br>[51,76,102]            | 11<br>[5]                     | 15<br>[97]                            |

**ENGINEERING SPECIFICATION: ZURN ZCF130**

8" [203mm] diameter "Control-Flo" roof drain for dead-level roof construction, Dura-Coated cast iron body. Combination membrane flashing clamp/gravel guard, aluminum "Control-Flo" weir, and Poly-Dome. "Control-Flo" weir shall be linear functioning with flow rate of 5 GPM [23 LPM] per inch of water buildup above drain. All data shall be verified proportional to flow rates.

**OPTIONS** (Check/specify appropriate options)**PIPE SIZE**

2,3,4 [51,76,102]

(Specify size/type) **OUTLET**

\_\_\_\_\_ NH No-Hub

**E BODY HT. DIM.**

3-1/4 [83]

**PREFIXES**

\_\_\_\_\_ Z D.C.C.I. Body with Poly-Dome\*  
\_\_\_\_\_ ZA D.C.C.I. Body with Aluminum Dome

**SUFFIXES**

\_\_\_\_\_ -A Waterproof Flange  
\_\_\_\_\_ -C Underdeck Clamp  
\_\_\_\_\_ -EB Elevating Body Plate  
\_\_\_\_\_ -G Galvanized Cast Iron  
\_\_\_\_\_ -R Roof Sump Receiver  
\_\_\_\_\_ -SSM Stainless Steel Mesh Screen Over Dome  
\_\_\_\_\_ -VP Vandal Proof Secured Top  
\_\_\_\_\_ -84 Stainless Steel Perforated Gravel Guard

\* Regularly furnished unless otherwise specified.

**Zurn Industries, LLC | Specification Drainage Operation**

1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

In Canada | **Zurn Industries Limited**

3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

[www.zurn.com](http://www.zurn.com)

Rev. D

Date: 9/2/15

C.N. No. 133123

Prod. | Dwg. No. ZCF130