




ZN-415-BE
BODY ASSEMBLY
WITH "TYPE BE" STRAINER

SPECIFICATION SHEET

TAG _____



Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

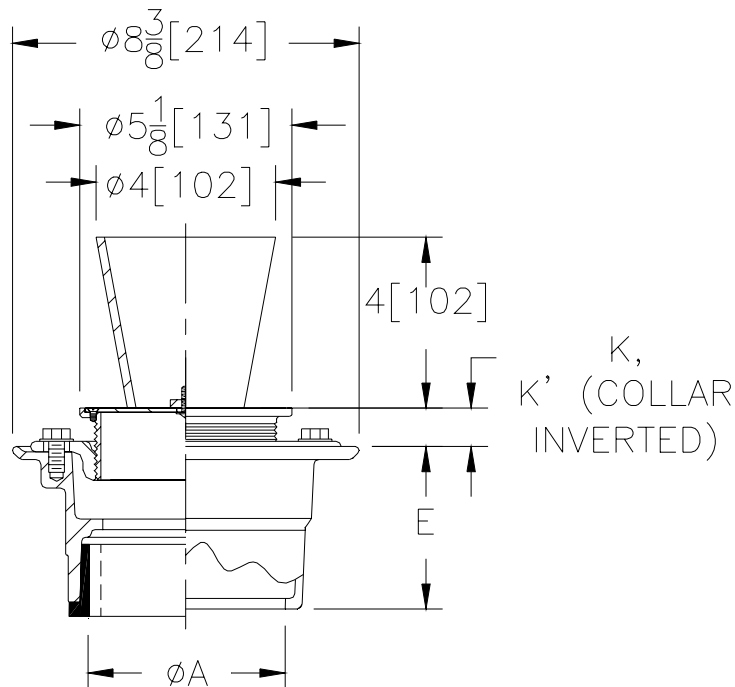

Str. Desig.	Dimensions In Inches / [mm]						Approx. Wt. Lbs. / (kg)	Strainer Open Area Sq. In. / [sq cm]
	A Pipe Size	Str. Dia.	K		K'			
			Min.	Max.	Min.	Max.		
-BE5	2-3-4-6 [51-76-102-152]	5 [127]	1/2 [13]	1-5/8 [41]	1-3/8 [35]	2-3/8 [60]	8 [4]	5 [32]

ENGINEERING SPECIFICATION: ZURN ZN-415-BE Funnel Floor Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "Type BE" polished nickel bronze round funnel grate with stainless steel screws.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4 [50,75,100]
2,3,4 [50,75,100]
2,3,4,6 [50,75,100,152]
2,3,4 [50,75,100]
2,3,4 [50,75,100]

(Specify size/type) **OUTLET**

_____ IC Inside Caulk
_____ IG Inside Gasket
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc

E BODY HT. DIM.

3 7/8 [98]
3 7/8 [98]
2 5/8 [67]
3 7/8 [98]
4 5/8 [117]

SUFFIXES

_____ -AR Acid Resistant Epoxy Coated Cast Iron
_____ -FS Floating Slab
_____ -G Galvanized Cast Iron
_____ -P 1/2" [13mm] Trap Primer Connection
_____ -U 1" [25mm] - 3" [76mm] High Extension Adapter
_____ -VP Vandal-Proof Secured Top
_____ -X Squeezin Backwater Valve
_____ -Y Sediment Bucket
_____ -6NH 6" [152mm] No-Hub Outlet (6IP w/Z-1040)
_____ -90 2" [51mm], 3" [76mm] or 4" [102mm] Side
Outlet Body Assembly (IP or NH only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A DATE: 06/16/05 C.N. NO. 89830

DWG. NO. 63638 PRODUCT NO. ZN-415-BE