


Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

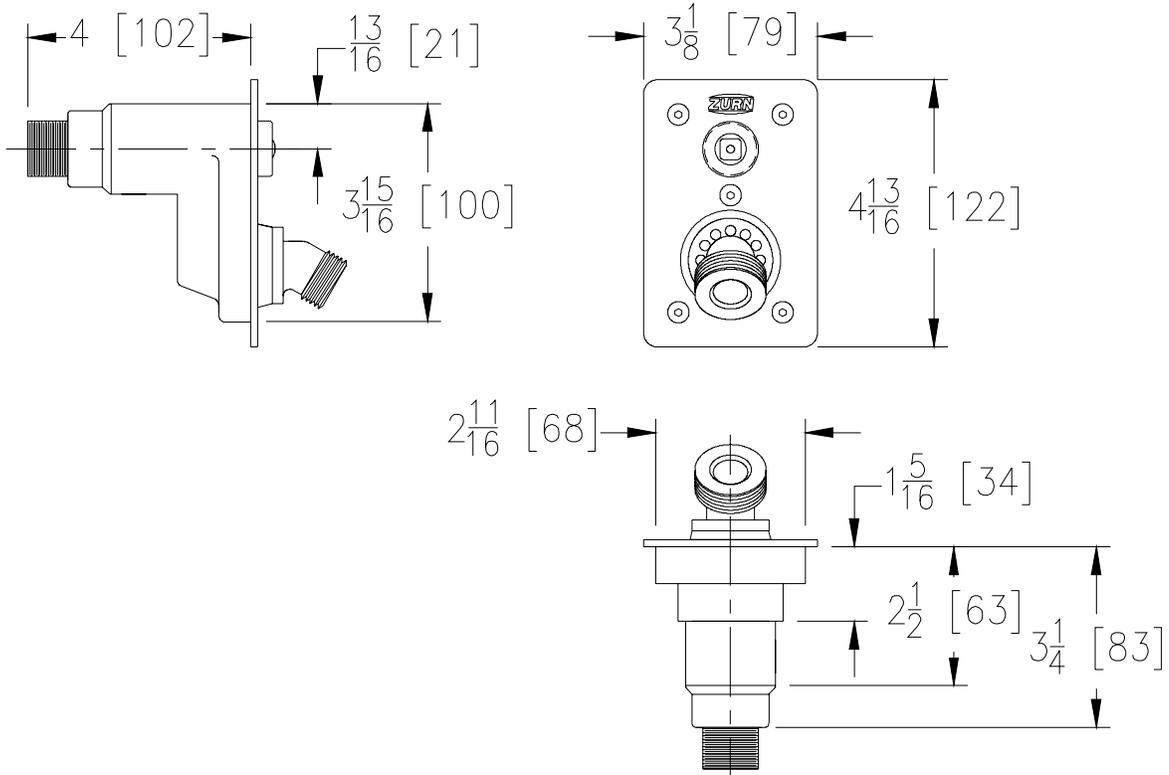

Wall Thickness In Inches	Approx. Wt. Lbs. [kg]
N/A	3 [1]

**ENGINEERING SPECIFICATION:** Z1334-C Exposed Ecolotrol, anti-siphon, automatic draining, wall hydrant for moderate climate and interior wall installation, complete with integral backflow preventer, all bronze interior parts, non-turning operating coupling with free-floating compression closure valve, and combination 3/4 [19] female solder and 3/4 [19] male pipe thread inlet connection standard. Regularly furnished with 3/4 [19] male angled nozzle hose connection. Includes operating key.

**OPTIONS** (Check/specify appropriate options)

**SUFFIXES**

- \_\_\_\_ -34EL 3/4 [19] 90° Solder Inlet Elbow
- \_\_\_\_ -34FIP 3/4 [19] 90° Female Pipe Thread Connection
- \_\_\_\_ -PB Polished Bronze Finish
- \_\_\_\_ -RK Hydrant Parts Repair Kit

