




Z125
8 3/8 [213] DIAMETER ROOF DRAIN

SPECIFICATION SHEET

TAG _____



Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

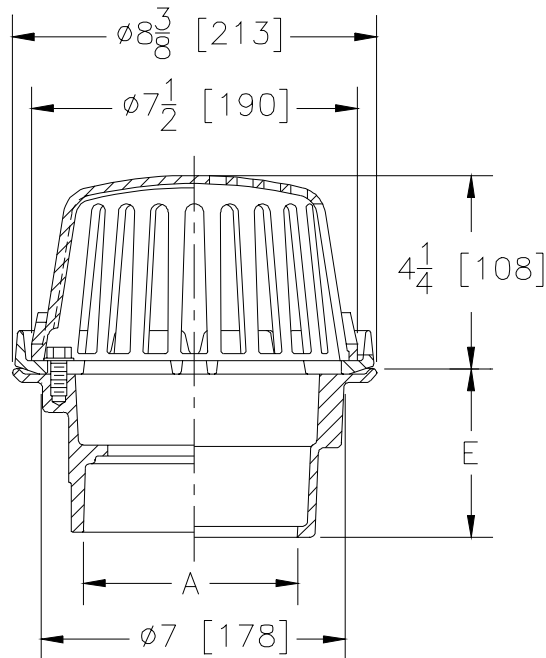

A- Pipe Size In.	Approx. Wt. Lbs. [kg]	Dome Open Area Sq. In. [cm ²]
2-3-4 [51-76-102]	14 [6]	43 [277]

ENGINEERING SPECIFICATION: ZURN Z125

8 3/8 [213] Diameter roof drain, Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard and low silhouette cast iron dome.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2 - 3 - 4 [51 - 76 - 102]
2 - 3 - 4 [51 - 76 - 102]
2 - 3 - 4 [51 - 76 - 102]
2 - 3 - 4 [51 - 76 - 102]

(Specify size/type) **OUTLET**

_____ IC Inside Caulk
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc

E' BODY HT. DIM.

3 7/8 [98]
2 5/8 [67]
3 7/8 [98]
4 5/8 [117]

PREFIXES

_____ Z D.C.C.I. Body with Dome

SUFFIXES

_____ -A Waterproof Flange
_____ -AR Acid-Resistant Epoxy Coated
_____ -C Underdeck Clamp
_____ -DP Top-Set® Roof Deck Plate
(Replaces both the -C and -R)
_____ -DR Adjustable Drain Riser Extension Assembly
3-5/8" [92] to 71/4" [184]
_____ -E Static Extension 1 [25] thru 4 [102] (Specify Ht.)
_____ -G Galvanized Cast Iron
_____ -R Roof Sump Receiver
_____ -SSM Stainless Mesh Screen Over Dome

_____ -VP Vandal-Proof Secured Top
_____ -84 Stainless Steel Perforated Gravel Guard
_____ -85 Stainless Steel Perforated Extension
_____ -89 2 [51] High External Water Dam
_____ -90 90° Threaded Side Outlet Body
(2 [51] through 4 [102])

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A DATE: 6/14/04 C.N. NO. 92281

DWG. NO. 65000 PRODUCT NO. Z125