



Z1320



SPECIFICATION SHEET

ECOLOTRON CERAMIC DISC WALL HYDRANT
Encased, Non-Freeze, Anti-Siphon, Automatic Draining

TAG _____



Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

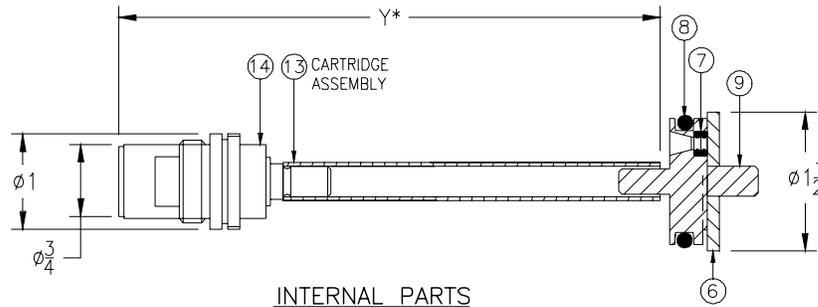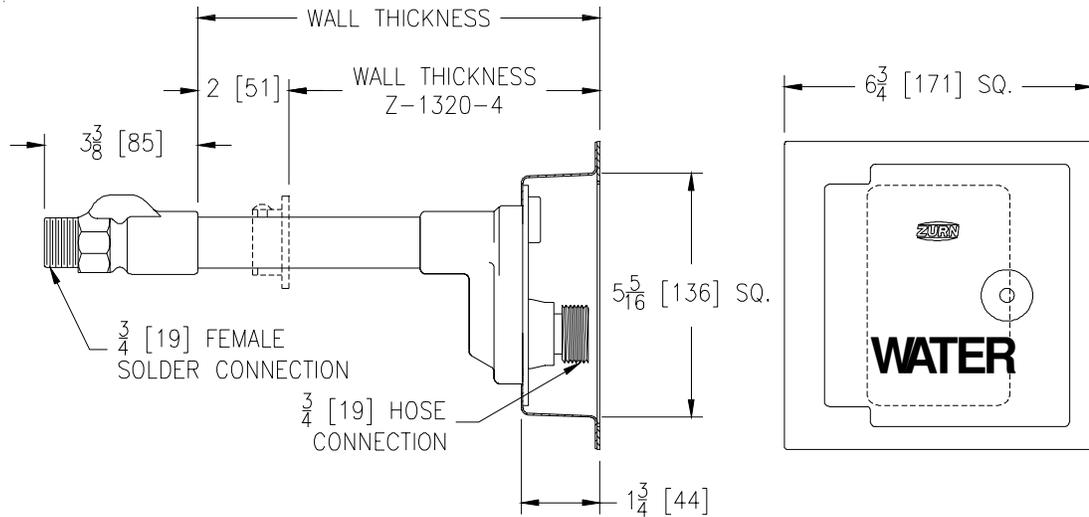

| Wall Thickness Inches [mm] | Approx. Wt. Lbs. [kg] |
|-------------------------------|--------------------------|
| 6-8 [152-203] | 5 [2] |
| 10-12-14 [254-305-356] | 6 [3] |
| 16-18 [406-457] | 7 [3] |
| 20-22-24 [508-559-610] | 8 [4] |
| 26-30 [660-762] | 10 [5] |

ENGINEERING SPECIFICATION: ZURN Z1320 Encased Ecolotrol "anti-siphon" automatic draining wall hydrant for flush installation. Complete with copper casing, all bronze interior parts with 1/2 turn ceramic disk cartridge and combination 3/4 [19] female solder and 3/4 [19] male pipe thread inlet. Nickel bronze box and hinged cover with operating key lock and "WATER" stamped on cover. (All solder connections are lead free.)

PARTS LIST

| Item | Name | Quan. |
|------|--------------------|-------|
| 14 | Cartridge | 1 |
| 13 | Operating Tube | 1 |
| 9 | Operating Coupling | 1 |
| 8 | 'O' Ring | 1 |
| 7 | 'O' Ring | 2 |
| 6 | Retaining Washer | 1 |

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ___ -CL Cylinder Lock
- ___ -PB Polished Bronze Face
- ___ -RK Hydrant Parts Repair Kit
- ___ -RT12 Ceramic Cartridge Removal Tool (Up to 12 [305] Wall)
- ___ -RT24 Ceramic Cartridge Removal Tool (Up to 24 [610] Wall)
- ___ -RT36 Ceramic Cartridge Removal Tool (Up to 36 [915] Wall)
- ___ -WC Wall Clamp
- ___ -34EL 3/4 [19] IP 90° Solder Inlet Elbow
- ___ -34FIP 3/4 [19] IP Straight Female Inlet Adapter

| | | |
|----------------|-------------------|----------------|
| REV. B | DATE: 03/26/07 | C.N. NO. 89845 |
| DWG. NO. 65227 | PRODUCT NO. Z1320 | |

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED