



ARCHITECTURAL & ENGINEERING SPECIFICATION

Prefabricated stainless steel shower unit, consisting of the TEMP-GARD pressure balancing shower valve with single bronze stem, stainless steel balancing piston & bottom access integral service stops. Standard with 1/2" [13mm] copper tubing assembly enclosed by 18 gage stainless steel #4 brushed finish shroud, 18 gage #4 finish thru ceiling extension piping cover, chrome plated brass shower head with flow control on institutional bracket, metal stem handle, side mount soap dish & all vandal proof securing screws.

PRODUCT FEATURES

- Pressure balancing shower valve with single bronze stem
- Stainless steel shroud with through ceiling extension piping cover
- 18 Gage Stainless Steel shroud

COMPLIANCE AND CERTIFICATION:

- Shower head, valve and plumbing fittings- Complies with ASME A112.18.1 / CSA B125.1
- Valve - Complies with ASSE 1016-2005




SUFFIX OPTIONS

_____	Specify Height of "X" Extension in Inches to Ceiling
-DV-2P-HW	Two-Way Diverter, Hand Shower, and 24"[610] Slide Bar
-i2	Fixed Spray Institutional Shower Head (2.5 GPM)
-i5	Large Brass Shower Head with Adjustable Spray Pattern (2.5 GPM)
-i9	Fixed Spray Institutional Shower Head (1.5 GPM)
-1.25	1.25 GPM Shower Head Flow Control
-1.5	1.5 GPM Shower Head Flow Control
-1.75	1.75 GPM Shower Head Flow Control
-2.0	2.0 GPM Shower Head Flow Control
-LS	Less Soap Dish
-SL	Short Length Shroud 26" (660mm)

ARCHITECTURAL & ENGINEERING APPROVAL

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

Rough-in/Overview dimensions

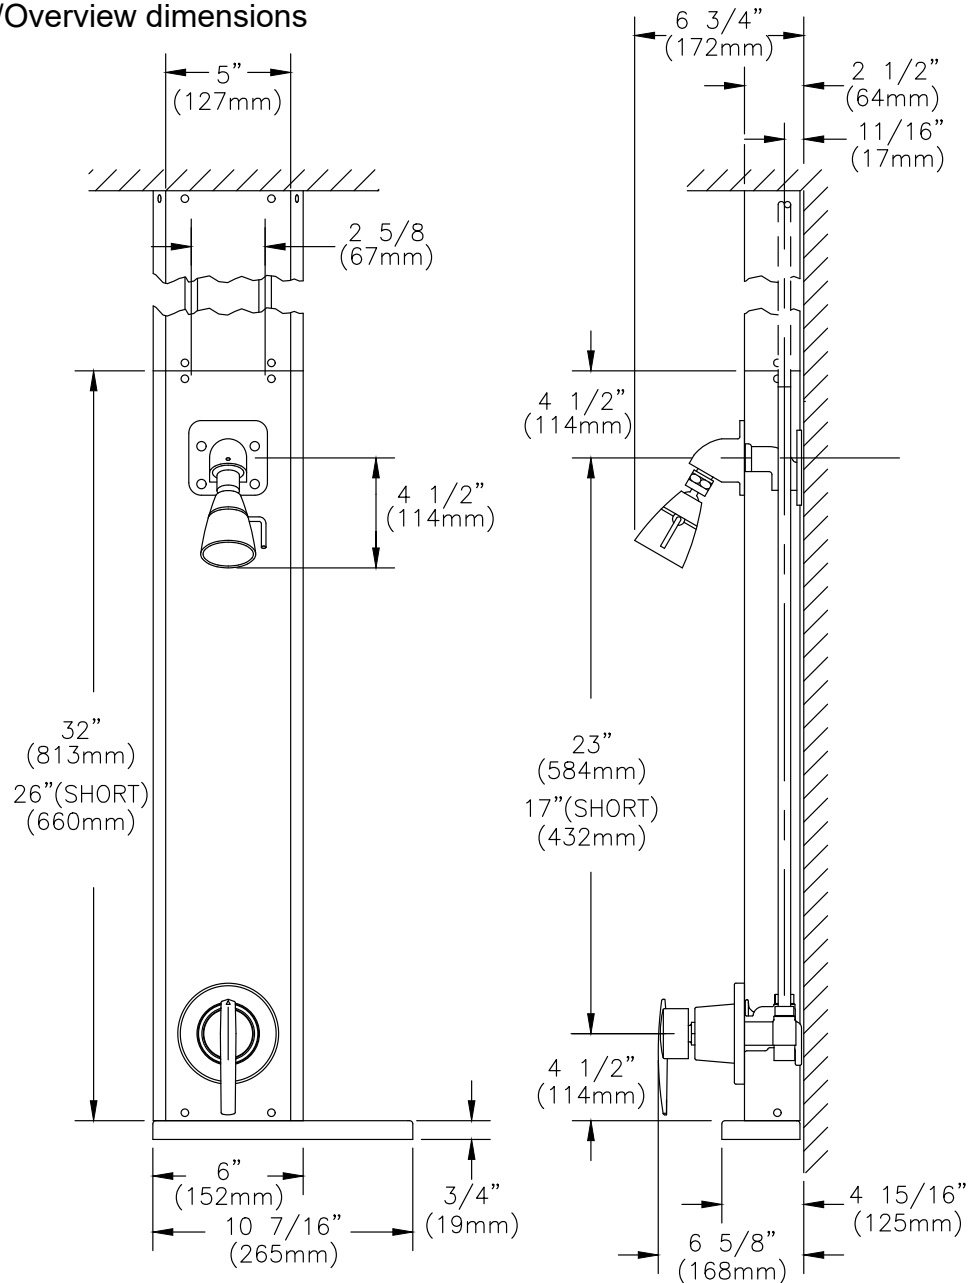

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.