


Engineering Specifications: Zurn AquaSpec® Z812V1

Polished chrome-plated cast brass faucet body with integral shanks, quarter turn ceramic disc cartridges and an 8" [203mm] centerline rigid gooseneck spout with vacuum breaker. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating female aerator (complying with ANSI A112.18.1 Standard for flow), 2 1/2" [64mm] vandal-resistant color-coded metal lever handles, mounting hardware and 1/2" NPSM coupling nuts for standard lavatory risers.

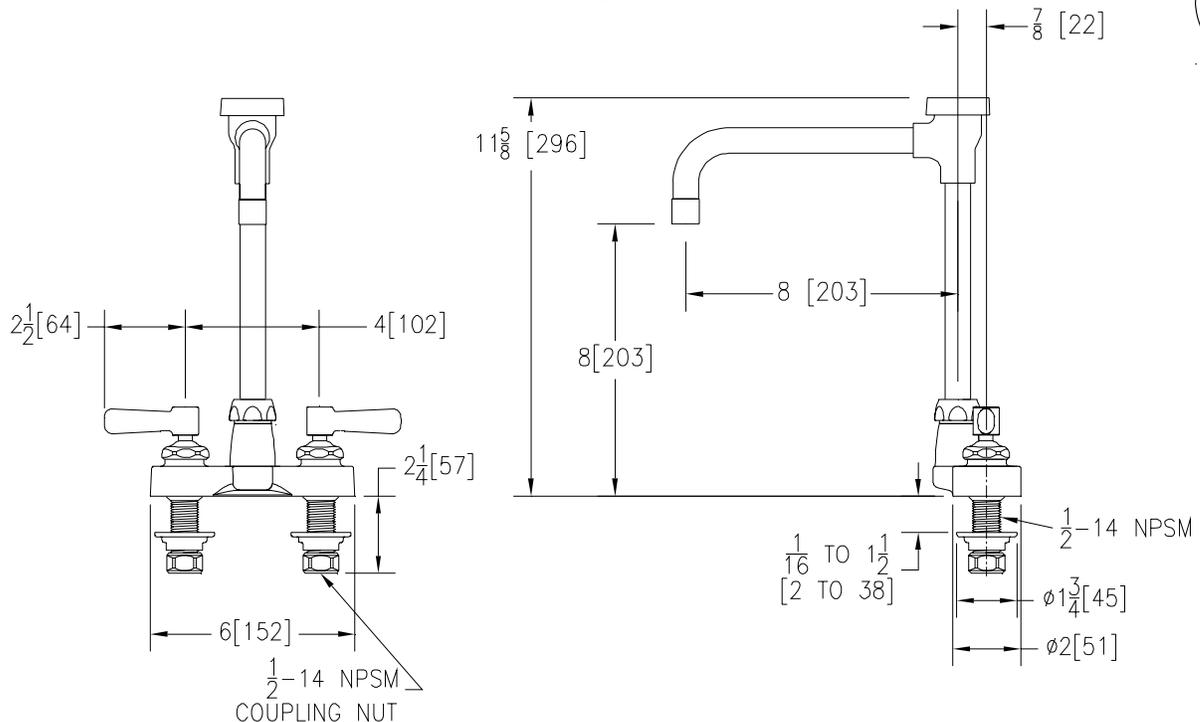

Note: All dimensions are for reference only. Do not use for pre-plumbing.

OPTIONAL ACCESSORIES

Suffix Description

- ___ -FC 2.0 GPM[7.6L]Laminar Flow Control in Base of Spout
- ___ -G 1-1/4" [32mm] Grid Strainer Drain
- ___ -HCT Hot/Cold Text Indexes
- ___ -LP Low Profile
- ___ -P 1-1/4" [32mm] Pop-up Drain
- ___ -PT 1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend
- ___ -2M 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Male Aerator
- ___ -3M 0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Male Aerator
- ___ -4M 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Male Laminar Flow
- ___ -6M 2.0 GPM [7.6 L] Male Serrated Nozzle Outlet
- ___ -7M 1.0 GPM [3.8 L] Pressure Compensating Male Spray Outlet
- ___ -16M 1.0 GPM [3.8 L] Vandal Resistant Pressure Compensating Male Spray Outlet
- ___ -17M 1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Male Aerator
- ___ -18M 1.5 GPM [5.7 L] Vandal Resistant Pressure Compensating Male Laminar Flow

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733

Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292