


## Engineering Specifications: Zurn AquaSpec® Z812V

Polished chrome-plated cast brass faucet body with integral shanks, quarter turn ceramic disc cartridges and an 8" [203mm] centerline rigid gooseneck spout with vacuum breaker. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), vandal-resistant color-coded metal four arm handles, mounting hardware and 1/2" NPSM coupling nuts for standard lavatory risers.

4" CENTERSET

TAG

Z812V2

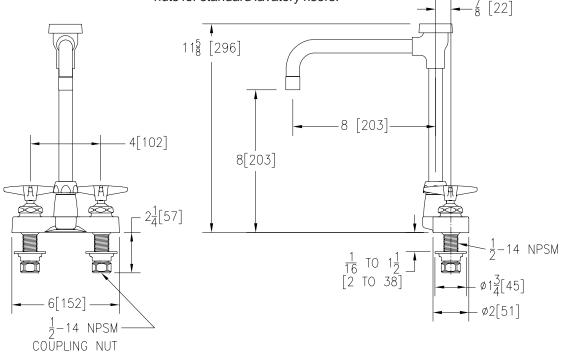

Note: All dimensions are for reference only. Do not use for pre-plumbing.

## **OPTIONAL ACCESSORIES**

## Suffix Description

- \_\_\_\_\_ -FC 2.0 GPM[7.6L]Laminar Flow Control in Base of Spout
- \_\_\_\_\_ -G 1-1/4" [32mm] Grid Strainer Drain
- \_\_\_\_\_ -HCT Hot/Cold Text Indexes
- \_\_\_\_ -LP Low Profile
- \_\_\_\_\_ -P 1-1/4" [32mm] Pop-up Drain
- -PT 1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend
- \_\_\_\_\_ -2M 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Male Aerator
- -3M 0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Male Aerator
- -4M 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Male Laminar Flow
- \_\_\_\_\_ -5M 2.0 GPM [7.6 L] Male Spray Outlet
- \_\_\_\_\_ -6M 2.0 GPM [7.6 L] Male Serrated Nozzle Outlet
- -7M 1.0 GPM [3.8 L] Pressure Compensating Male Spray Outlet
- \_\_\_\_\_ -16M 1.0 GPM [3.8 L] Vandal-Resistant Pressure Compensating Male Spray Outlet
- \_\_\_\_\_ -17M 1.5 GPM [5.7 L] Vandal-Resistant Pressure Compensating Male Aerator
- \_\_\_\_\_ -18M 1.5 GPM [5.7 L] Vandal-Resistant Pressure Compensating Male Laminar Flow

ZURN INDUSTRIES, INC. COMMERCIAL BRASS OPERATION 2640 SOUTH WORK STREET FALCONER NY 14733 Phone: 1-716-665-1132 Fax: 1-716-665-1135 World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED • 3544 Nashua Drive • Mississauga, Ontario L4V1L2 • Phone: 905/405-8272 Fax: 905/405-1292