


## **4" CENTERSET** Z812V6

TAG		

## Engineering Specifications: Zurn AquaSpec® Z812V6

Polished chrome-plated cast brass faucet body with integral shanks, quarter turn ceramic disc cartridges and an 8" [203mm] centerline rigid gooseneck spout with vacuum breaker. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 6" [152mm] vandal-resistant color-coded metal wrist blade handles, mounting hardware and 1/2" NPSM coupling nuts for standard lavatory risers.

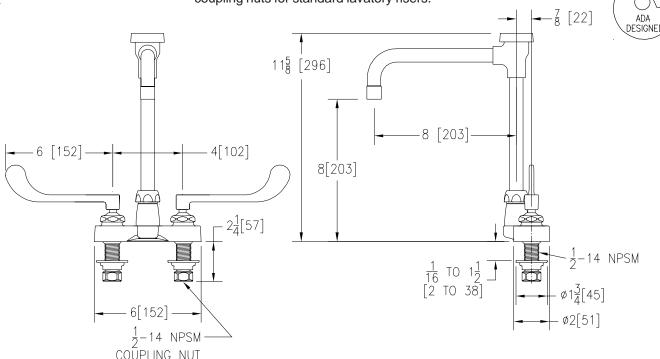

Note: All dimensions are for reference only. Do not use for pre-plumbing.

## OPTIONAL ACCESSORIES

## **Suffix Description**

FC	2.0 GPM[7.6L]Laminar Flow Control in Base of Spout
G	1-1/4" [32mm] Grid Strainer Drain
HCT	Hot/Cold Text Indexes
LP	Low Profile
P	1-1/4" [32mm] Pop-up Drain
PT	1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend
2M	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Male Aerator
3M	0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Male Aerator
4M	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Male Laminar Flow
5M	2.0 GPM [7.6 L] Male Spray Outlet
6M	2.0 GPM [7.6 L] Male Serrated Nozzle Outlet
7M	1.0 GPM [3.8 L] Pressure Compensating Male Spray Outlet
16M	1.0 GPM [3.8 L] Vandal-Resistant Pressure Compensating Male Spray Outlet
17M	1.5 GPM [5.7 L] Vandal-Resistant Pressure Compensating Male Aerator
18M	1.5 GPM [5.7 L] Vandal-Resistant Pressure Compensating Male Laminar Flow

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733 Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com