




# Exposed ZEMS6203-IS Metroflush Model Hardwired Automatic Sensor Flush Valve For 3/4" Urinal Valves

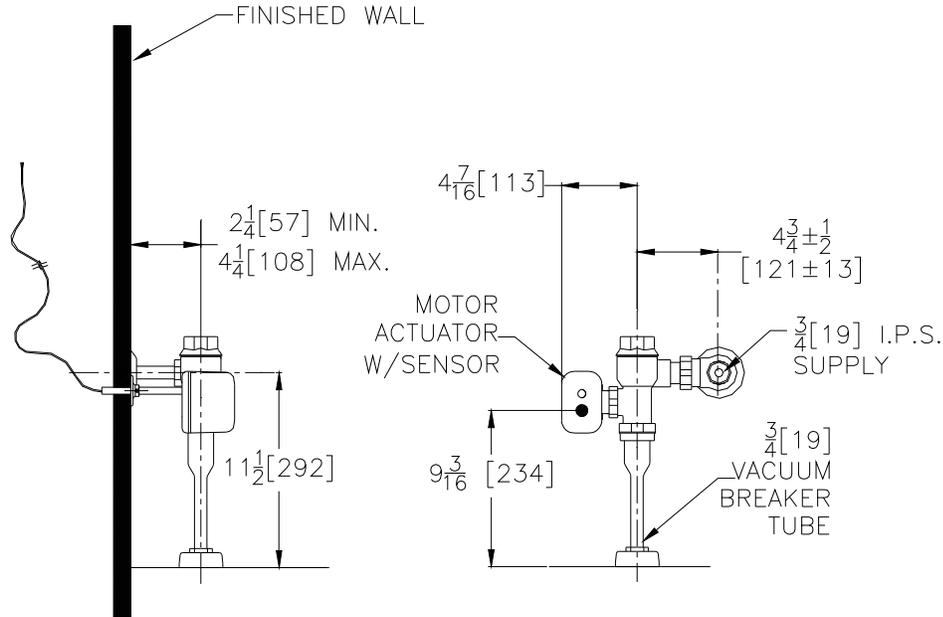

### Flow Options

- EWS 0.5 Gallons Per Flush
- WS1 1.0 Gal. Low Consumption Flush
- Standard Flush 1.5 Gallons Per Flush

### Suffix Options (Check/Specify Appropriate Options)

- \_\_\_\_\_ -VC Vandal-Resistant Stop Cover
- \_\_\_\_\_ -YJ Split Ring Pipe Support
- \_\_\_\_\_ -YK Solid Ring Pipe Support
- \_\_\_\_\_ -YO Bumper On Angle Stop
- \_\_\_\_\_ Other

### Accessories (Order separate as specified)

- P6000-PC6** Plug-in Power Converter  
(Up to 4 valves)
- P6000-MJ** Mini Junction Box
- P6000-HW6** Hardwire Power Converter  
(Up to 8 valves)

**NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6000-PC6 PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.**

The information contained in this document is subject to change without notice.  
Please contact Zurn for most up to date information.

### ENGINEERING SPECIFICATION: ZURN ZEMS6203-IS Metroflush Exposed Hardwired AquaSense® Flush Valve

**For Water Closets-** The Metroflush valve is a piston operated brass flush valve with a polished chrome exterior. The valve is ADA compliant and incorporates a motorized actuator, an integral infrared convergence-type proximity sensor and a manual push-button override into an all-metal, polished chrome plated housing. Complete with Zurn's MetroFlush chloramine resistant piston with a clog resistant filtered by-pass high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection and a wall flange with set screw. Internal seals are made of chloramine resistant materials.

This space is for Architectural/engineering Approval