


## ZEMS6252

### Hardwired Automatic Sensor Valve for Water Closets

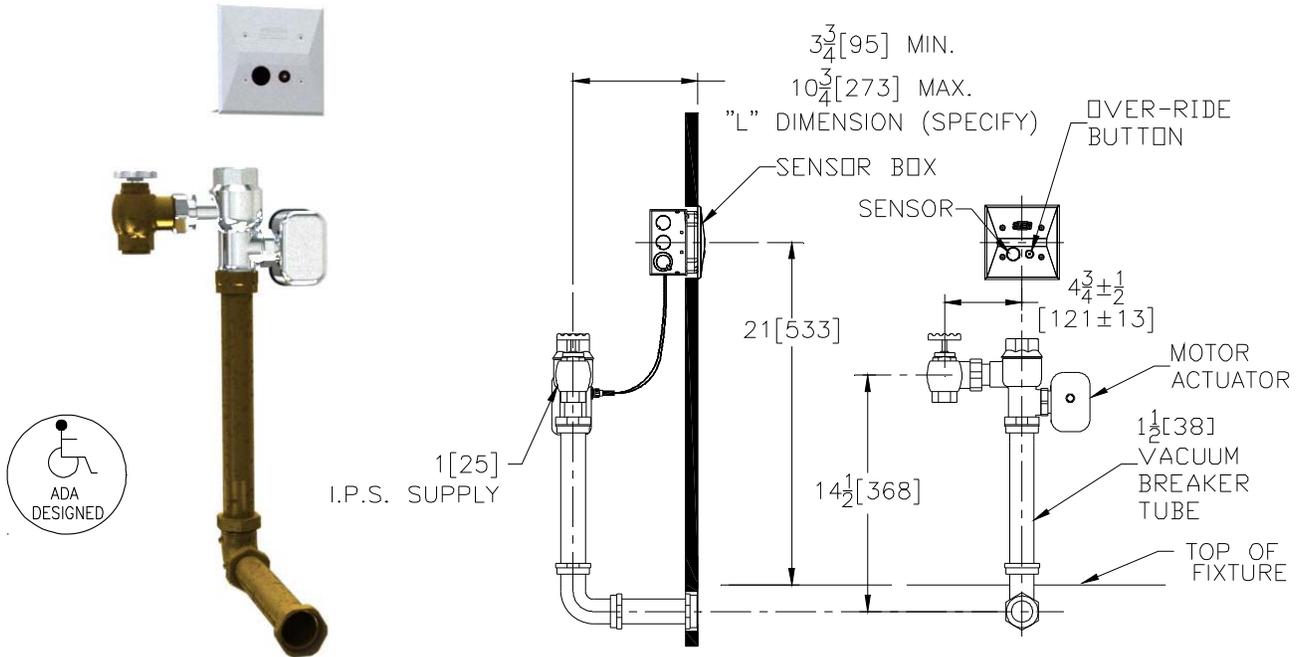

### Flow Options

- HET 1.28 gpf High Efficiency
- WS1 1.6 gpf Low Consumption Flush
- FF 4.5 gpf Full Flush
- 3.5 gpf

### Accessories

- \_\_\_\_\_ Other

### Power Supply Choices (Sold Separately)

- ACA-BA 6VDC Plug-in Power Converter (Up to 6 valves)
- HW6 Hardwired Power Converter (Up to 8 Valves)
- MJ Mini Junction Box

Architectural/Engineering Approval

The information contained in this document is subject to change without notice.  
Please contact Zurn for most up to date information.

**NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6900-ACA-BA PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.**

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION  
5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330  
Phone: 1-800-997-3876 ♦ Fax: 919-775-3541  
www.zurn.com  
In Canada: ZURN INDUSTRIES LIMITED  
3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2  
Phone: 905-405-8272 Fax: 905-405-1292

### ENGINEERING SPECIFICATIONS

Concealed, quiet piston-type, chrome plated flushometer valve.

- Piston Operated
  - Clog resistant filtered by-pass
  - Chloramine resistant
  - Dual Seal
- Proprietary DR resistant low lead brass alloy
- Actuator
  - 6VDC Motorized Automatic Sensor
  - Manual push button override
  - Courtesy flush
  - Automatic 8 hour flush
  - Diagnostic indicator lights
  - ADA compliant
  - Non-hold open and no leak feature
- Control Stop
  - Internal siphon-guard protection
  - Sweat solder kit
- Vacuum Breaker
  - High back pressure
  - One piece hex coupling nut
- Internal seals
  - Chloramine resistant
- Adjustable tailpiece
- Spud coupling and flange for back spud connection