




# Exposed ZEMS6001-IS Model Hardwired Automatic Sensor Flush Valve For 1-1/4" Urinals

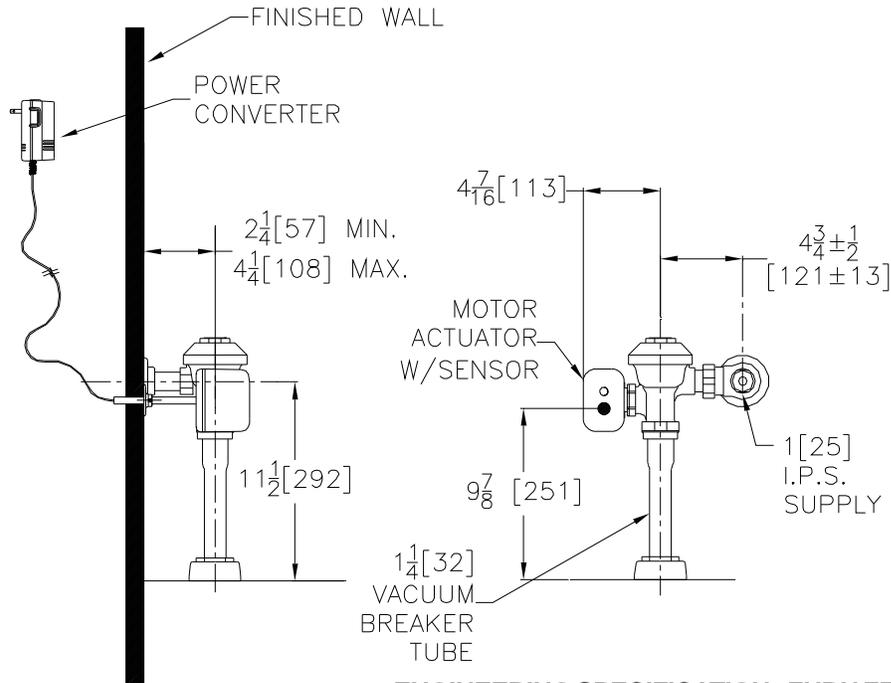

**Flow Options**

- EWS 0.5 Gallons Per Flush
- WS1 1.0 Gal. Low Consumption
- WS 1.5 Gal. Water Saver
- Standard Flush 3.0 Gallons Per Flush

**Suffix Options (Check/Specify Appropriate Options)**

- \_\_\_\_\_ -VC Vandal Resistant Stop Cover
- \_\_\_\_\_ -YB Sweat Solder Kit
- \_\_\_\_\_ -YC Cast Wall Flange
- \_\_\_\_\_ -YJ Split Ring Pipe Support
- \_\_\_\_\_ -YK Solid Ring Pipe Support
- \_\_\_\_\_ -YO Bumper on Angle Stop
- \_\_\_\_\_ Other

**Accessories (Order separate as specified)**

- P6000-PC6** 6VDC Plug-in Power Converter (Up to 8 valves)
- P6000-MJ** Mini Junction Box
- P6000-HW6** Hardwire Power Converter (Up to 8 valves)

**ENGINEERING SPECIFICATION: ZURN ZEMS6001-IS AquaFlush**

**Exposed Hardwired Automatic Sensor Flush Valve for Urinals-** Exposed, quiet diaphragm-type, chrome plated, flushometer valve with a polished exterior. Complete with a chloramine resistant, dual seal diaphragm with a clog resistant bypass. The valve incorporates a 6 VDC motorized actuator, an integral infrared convergence-type proximity sensor and a manual push-button override into an all-metal, polished chrome plated housing. Sensor range automatically adjusts to its environment at power up and is powered by a 6 VDC power converter. Each power converter can accommodate up to eight flush valves. The valve is complete with high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection. Internal seals are made of chloramine resistant materials.

- ZEMS6001PL-IS - Aquafush Plus** is furnished as specified above and includes sweat solder kit, vandal resistant stop cap, and cast wall flange with set screw. **Complete with a chloramine resistant, dual seal diaphragm with a clog resistant bypass.**

This space is for Architectural/engineering Approval