




Z154-DT

12-5/8 [321] SQUARE TOP PROM-DECK DRAIN
W/ DECORATIVE GRATE & ROTATABLE FRAME

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

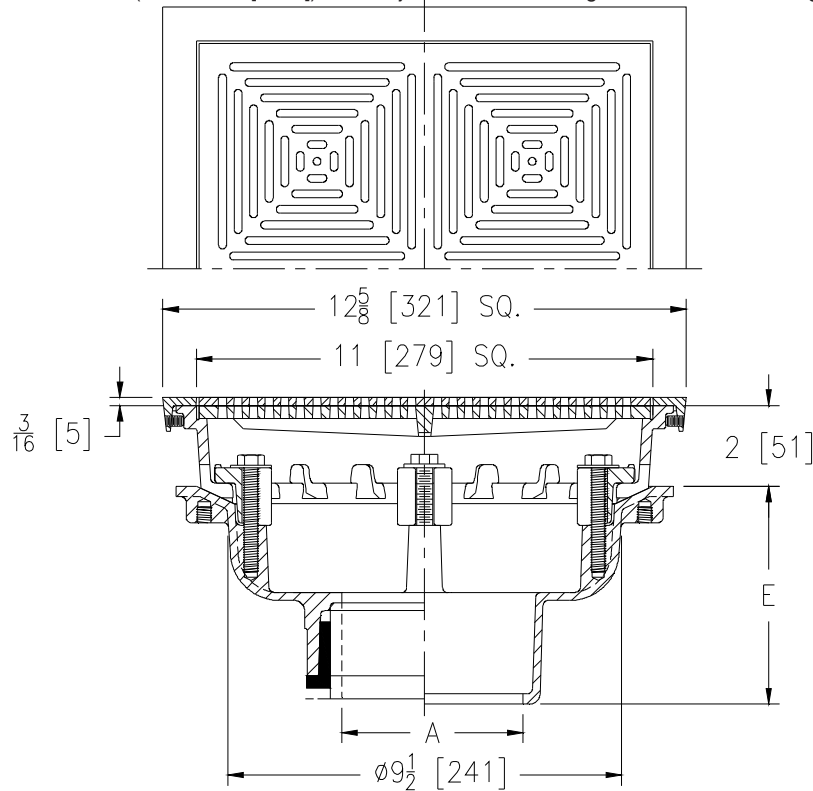

A Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2,3,4,6 [51,76,102,152]	34 [15]	42 [271]

ENGINEERING SPECIFICATION: ZURN ZN154-DT

12-5/8" [321mm] Square top Prom-Deck drain, Dura-Coated cast iron body with rotatable square promenade frame with seepage openings, frame clamps and decorative light duty heel-proof grate with 3/16" [5mm] wide slots and nickel bronze veneer frame and grate.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2, 3, 4, 6 [51, 76, 102, 152]
2, 3, 4, 6 [51, 76, 102, 152]
2, 3, 4, 6 [51, 76, 102, 152]
2, 3, 4 [51, 76, 102]

(Specify size/type) OUTLET

___ IC Inside Caulk
___ IP Threaded
___ NH No-Hub
___ NL Neo-Loc

'E' BODY HT. DIM.

5-1/4 [133]
3-3/4 [95]
5-1/4 [133]
4-9/16 [117]

PREFIXES

___ ZB D.C.C.I. Body with Decorative Polished Bronze Top
___ ZN D.C.C.I. Body with Decorative Polished Nickel Bronze Top*

SUFFIXES

___ -AR	Acid Resistant Epoxy Coated Finish	___ -SC	Secondary Clamp Collar
___ -C	Underdeck Clamp	___ -TC	Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Bottom Outlet Only)
___ -DP	Top-Set® Roof Deck Plate	___ -TS	Top Secured with Slotted Screws
___ -E	Static Extension (1 [25] thru 4 [102])(Specify Height))	___ -VP	Vandal-Proof Secured Top
___ -EB	Top-Set® Adjustable Extension Assembly	___ -Y	Sediment Bucket
___ -G	Galvanized Cast Iron	___ -85	Stainless Steel Perforated Extension
___ -S	Secondary Strainer	___ -90	90° Threaded Side Outlet Body (2,3,4 [51,76,102])

* Regularly furnished unless otherwise specified.