


TEMP-GARD III SHOWER UNIT Z7301-SS-MT-DV-2P-HW-H9-S9

TAG

ENGINEERING SPECIFICATIONS: ZURN Z7301-SS-MT-DV-2P-HW-H9-S9

Single handle pressure balancing mixing shower unit, ceramic control cartridge with stainless steel balancing piston, built in reverse connection capability (To reverse the hot and cold inlets simply remove cartridge and turn 180°), two service stops / check stops, and adjustable limit stop. When valve is turned on it must rotate from cold through to the hot position. All exposed trim and handle are metal with polished nickel chrome plated surface. The valve is supplied with a two-way brass diverter valve, 1.6 GPM adjustable spray hand/wall showerhead in chrome finish, 60" flexible metal hose, 24" mounting slide bar wall connection, (ABS plastic) 1.5 GPM -S9 shower head, arm and flange in chrome plated finish. The valve body is a four port valve with a tub port plug included for shower only applications. The valve inlets, shower and tub outlet are all standard with 1/2" NPT female thread connections. The 1/2" copper sweat options must be specified as shown below.

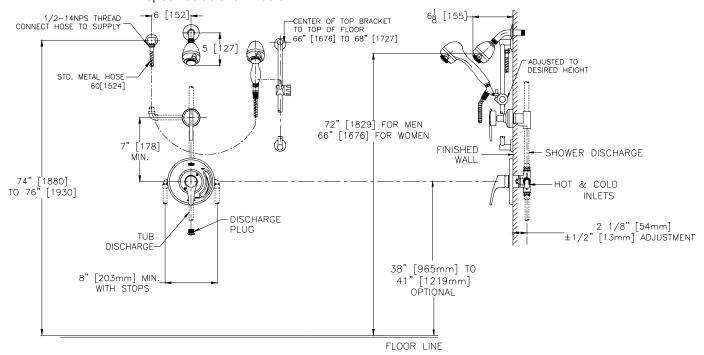

Note: All dimensions are for reference only. Do not use for pre-plumbing. Parts shown as hidden lines are supplied by others.

Parts shown as hidden lines are supplied by others.	STANDARDS
OPTIONS (Check/specify appropriate options) Use with Z7300 prefix Suffix Description	ASME A112.18.1 / CSA B125.1 IAPMO [®] Listed Meets or Exceeds ANSI A117.1M standard for physically handicapped
Additional Options	
Z7000-SCPair of Dual Spring Check ValvesZ7000-S5Large Brass Shower Head with Spray AdjustmentZ7000-S6Small Brass Shower Head with Spray Adjustment	
ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 Phone: 1-800-997-3876 ♦ Fax: 1-919-775-33 In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, (541 ♦ www.zurn.com

Rev. B Dwg. No. 93460 CTANDADDC