




# PEX-AI-PEX x Male Solder Adapter - QHPAPA\_\_M

## Specification Sheet

Tag \_\_\_\_\_

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

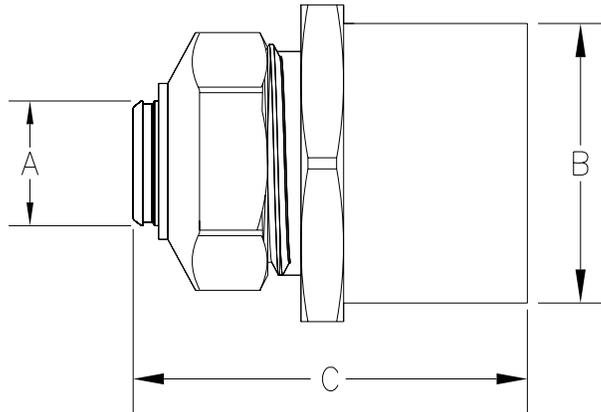

Part Number	Nominal Size	'A' in [mm]	'B' in [mm]	'C' in [mm]
QHPAPA22M	3/8" Pex-AI-Pex Comp. x 1/2" Male Solder	0.330 [8.4]	0.63 [15.9]	1.63 [41.5]
QHPAPA33M	1/2" Pex-AI-Pex Comp. x 1/2" Male Solder	0.482 [12.2]	0.63 [15.9]	1.63 [41.5]
QHPAPAJ4M	5/8" Pex-AI-Pex Comp. x 3/4" Male Solder	0.620 [15.8]	0.88 [22.3]	1.89 [48.0]
QHPAPA44M	3/4" Pex-AI-Pex Comp. x 3/4" Male solder	0.781 [19.8]	0.88 [22.3]	1.95 [49.5]
QHPAPA55M	1" Pex-AI-Pex Comp. x 1" Male Solder	.998 [25.3]	1.13 [28.6]	2.13 [54.0]

**Engineering Specification:** ZurnPEX® brass PEX-AI-PEX compression x male solder adapter. The QHPAPA\_\_M adapter to transition from female copper pipe fitting to PEX-AI-PEX tubing. Tubing is sealed with the use of two buna-N O-rings per barb. For use with PEX-AI-PEX Alumicor® tubing made to ASTM F1281. For use in radiant heating and snow melting systems.

### Accessories

___ Q2PAPX	3/8" Alumicor® PEX-AI-PEX
___ Q3PAPX	1/2" Alumicor® PEX-AI-PEX
___ QJPAPX	5/8" Alumicor® PEX-AI-PEX
___ Q4PAPX	3/4" Alumicor® PEX-AI-PEX
___ Q5PAPX	1" Alumicor® PEX-AI-PEX

Rev. A	Date: 11/06/08	C.N. No. 99354
Dwg. No. 83667		Prod. No. QHPAPA__M