




Zurn PEX® CR - Polymer Fittings UL 1821 Listed Barb Tee - QQPT__FX Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

Note: Barb geometry will vary depending upon barb size.

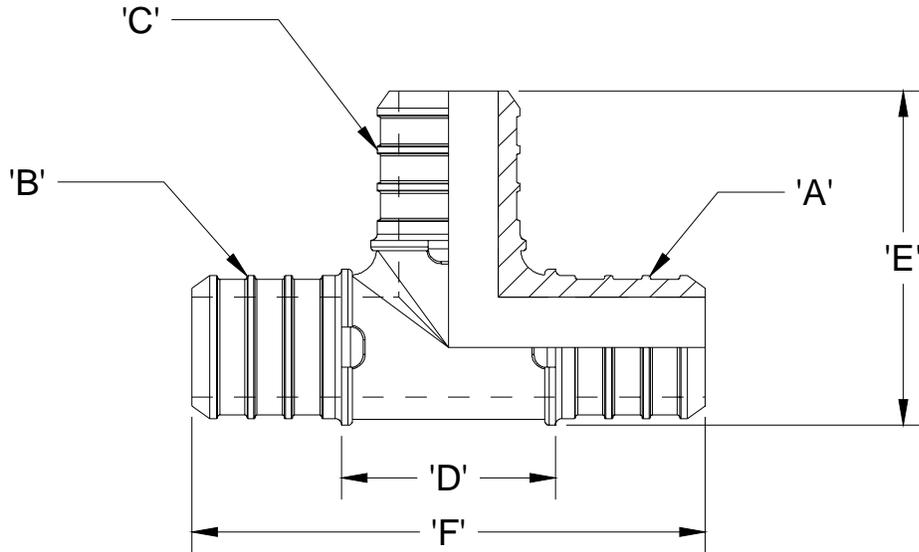

Part Number	Description	'A'	'B'	'C'	'D'	'E'	'F'
QQPT553FX	1" Barb x 1" Barb x 1/2" Barb Tee	1" Barb	1" Barb	1/2" Barb	1.00" [25.4]	1.79" [45.5]	2.68" [68.1]
QQPT554FX	1" Barb x 1" Barb x 3/4" Barb Tee	1" Barb	1" Barb	3/4" Barb	0.98" [24.9]	1.74" [44.2]	2.68" [68.1]
QQPT555FX	1" Barb x 1" Barb x 1" Barb Tee	1" Barb	1" Barb	1" Barb	1.36" [35.5]	2.00" [50.8]	3.05" [77.5]

Engineering Specification: Zurn PEX® CR Polymer Tee. The QQPT__FX tee is used to branch off the main loop or grid to one or more domestic water fixtures.. Molded from Acudel®. These fittings, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 130 PSI at 120°F (fire protection rating), 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed by NSF as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, ASTM F877, CSA B137.5, ASTM 2159, and UL 1821.

Accessories

___ QCLP3X	1/2" QuickClamp® Crimp Ring
___ QCLP4X	3/4" QuickClamp® Crimp Ring
___ QCLP5X	1" QuickClamp® Crimp Ring
___ QCR3X	1/2" Copper Crimp Ring
___ QCR4X	3/4" Copper Crimp Ring
___ QCR5X	1" Copper Crimp Ring

Rev.	Date: 10/8/10	C.N. No. 111808
Dwg. No. 302746		Prod. No. QQPT__FX