




QQZBMC_G

Z-Bite™ MALE ADAPTER

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

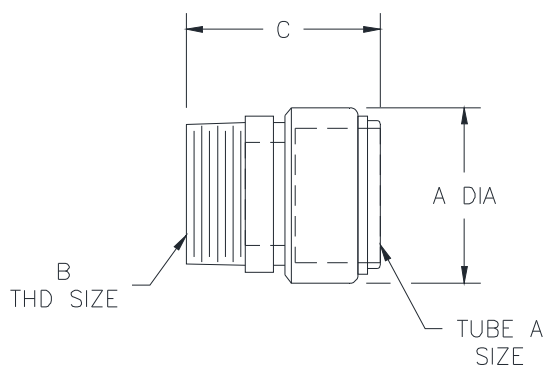

Part Number	Dimensions in Inches [mm]					Bag Qty.	Carton Qty.
	Description	A Dia	Tube A Size	B THD Size	C		
QQZBMC23G	Male Adapter - 3/8 Z-Bite X 1/2 MPT	0.87 [22]	3/8	1/2	1.6 [41]	6	198
QQZBMC33G	Male Adapter - 1/2 Z-Bite X 1/2 MPT	1.07 [27]	1/2	1/2	1.76 [45]	12	120
QQZBMC34G	Male Adapter - 1/2 Z-Bite X 3/4 MPT	1.04 [26]	3/4	3/4	1.76 [45]	6	60
QQZBMC44G	Male Adapter - 3/4 Z-Bite X 3/4 MPT	1.35 [34]	1	3/4	1.91 [49]	12	60
QQZBMC54G	Male Adapter - 1 Z-Bite X 3/4 MPT	1.66 [42]	1	3/4	2.02 [51]	6	42
QQZBMC55G	Male Adapter - 1 Z-Bite X 1 MPT	1.66 [42]	1	1	2 [51]	6	30

ENGINEERING SPECIFICATION: QQZBMC_G

Zurn Z-Bite™ Fittings are certified by IAPMO to meet the requirements of ASSE 1061 for Push Fittings, NSF Standard 61 for potable water applications and NSF Standard 372 for low lead. The fittings may be used with PEX, CPVC or copper tube sizes. The fittings comply with the requirements of the model plumbing codes for use in inaccessible locations. The grip ring is made from Type 304 stainless steel, the o-ring is a chloramine resistant EPDM and the integral tube stiffener for PEX is made from polysulfone. The brass body of the fitting is C46500 alloy.

ACCESSORIES

____ QQZBDC2	3/8 Disconnect Clip
____ QQZBDC3	1/2 Disconnect Clip
____ QQZBDC4	3/4 Disconnect Clip
____ QQZBDC5	1 Disconnect Clip
____ QQZBDBT	Depth Gage & Deburring Tool, 3/8, 1/2, 3/4, & 1

* Regularly furnished unless otherwise specified.