




# Copper Male Sweat X PEX Adapter QQ\_\_CX Specification Sheet

Tag \_\_\_\_\_

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

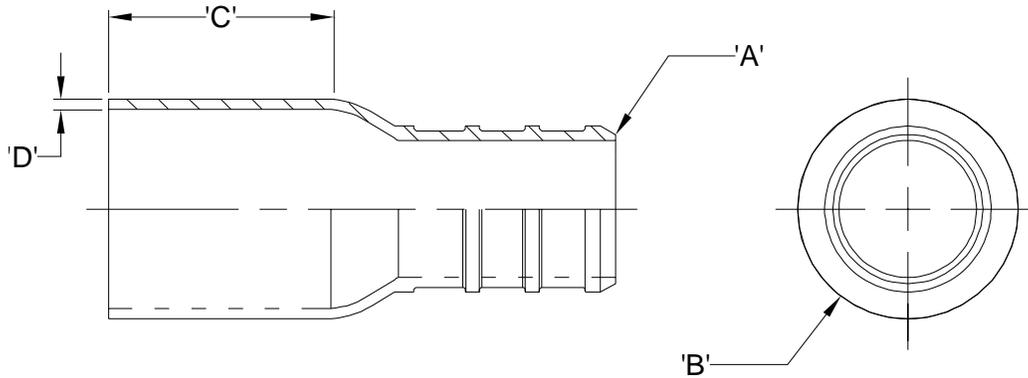

Part Number	Description	'A'	'B'	'C'	'D'
QQ650CX	1/2" Male Sweat x 1/2" Barb	1/2" Barb	0.62" [15.8]	0.56" [14.2]	0.03" [0.7]
QQ675CX	3/4" Male Sweat x 3/4" Barb	3/4" Barb	0.87" [22.2]	0.81" [20.6]	0.03" [0.7]
QQ700CX	1" Male Sweat x 1" Barb	1" Barb	1.13" [28.6]	0.97" [24.6]	0.04" [1.0]

**Engineering Specification:** Zurn PEX® Copper Male Sweat x Zurn PEX® adapters. The QQ\_\_CX adapter is made to fit inside a wrought copper fitting. These fittings, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed as complying with the following standards: NSF/ANSI Standard 61, CSA B137.5, and ASTM F1807.

### Accessories

- \_\_\_ QCLP3X 1/2" QuickClamp® Crimp Ring
- \_\_\_ QCLP4X 3/4" QuickClamp® Crimp Ring
- \_\_\_ QCLP5X 1" QuickClamp® Crimp Ring
- \_\_\_ QCR3X 1/2" Copper Crimp Ring
- \_\_\_ QCR4X 3/4" Copper Crimp Ring
- \_\_\_ QCR5X 1" Copper Crimp Ring
- \_\_\_ QS0ET3X 1/2" Stainless Steel Crimp Ring
- \_\_\_ QS0ET4X 3/4" Stainless Steel Crimp Ring
- \_\_\_ QS0ET5X 1" Stainless Steel Crimp Ring

Rev.	Date: 11/23/2009	C.N. No.110448
Dwg. No. 84397		Prod. No. QQ__CX