



## Model: Z.WC1.S.TM

Zurn One Sensor Wall Hung Toilet System with  
1.1 GPF EcoVantage® Battery Powered Flush Valve

TAG \_\_\_\_\_

### Architectural/Engineering Specification:

Complete EcoVantage® high efficiency 1.1 gpf sensor actuated, battery powered, wall mounted commercial water closet system with ZER6000AV-ONE-TM exposed, sensor activated with manual override button chrome plated closet diaphragm flushometer for either left or right hand supply, Z5955SS-EL open front commercial toilet seat, Z5615-BWL wall mounted vitreous china water closet with Z5977-NEO NeoSeal outlet sealing gasket assembly kit and Z5610-NUT-EXT-KIT manufactured by Zurn Industries.

### Product Features:

- 1.1 gpf (gallons per flush)
- Wall mounted elongated front rim top spud toilet
- High efficiency siphon jet flush action
- 2-1/8" fully glazed trapway
- Large water spot - 12' x 10'
- Vitreous china wall bowl construction
- Static weight load of 1000 lb\*
- Diaphragm- type flushometer complete with Zurn's Go Blue® TPE, chloramine resistant, dual seal diaphragm with a clog resistant filtered by-pass.
- Manual Override Button
- High pressure vacuum breaker
- Adjustable tailpiece
- Contol stop with internal siphon guard protection, vandal resistant cap, sweat solder kit and cast wall flange with set screw
- Open front, elongated, white commercial toilet seat with SS check hinges
- NeoSeal® outlet gasket assembly
- 14% water savings over standard 1.28 gpf system
- 31% water savings over standard 1.6 gpf system

### Recommended Carrier:

**Z1201 or Z1202 EZCarry™** 500 lbs load rated High Efficiency Carrier



### Zurn One System Packout Includes:

#### Water Closet - Z5615-BWL:

Vitreous China, 1.1 gpf [4.2 Lpf] or greater high efficiency wall hung toilet with siphon jet flushing action and elongated front rim with 1-1/2" top spud.

#### Flush Valve - ZER600AV-ONE-TM:

The ZER EZ Gear-Driven Water Closet Flush Valve is performance engineered with the dual action of the ceramic disc cartridge and motor gear-driven operation. Its polished chrome-plated finish, modern top-mount design with manual override button, and quiet diaphragm operation are ideal for new and retrofit commercial restroom applications.

#### Z5955SS-EL:

Elongated, open front white toilet seat with stainless steel check hinges


#### Z5610-NUT-EXT-KIT:

Retrofit nut kit for extending carrier studs from existing wall

#### Z5977-NEO:

NeoSeal® gasket kit for wall mounted bowls

### Compliance and Certification:



Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

Fixture - Complies with ASME A119.2 / CSA B45.1

### Architectural/Engineering Approval

The information contained in this document is subject to change without notice.  
Please contact Zurn for most up to date information.




## Model: Z.WC1.S.TM

Zurn One Sensor Wall Hung Toilet System with  
1.1 GPF EcoVantage® Battery Powered Flush Valve

TAG \_\_\_\_\_

### Rough-in Dimensions

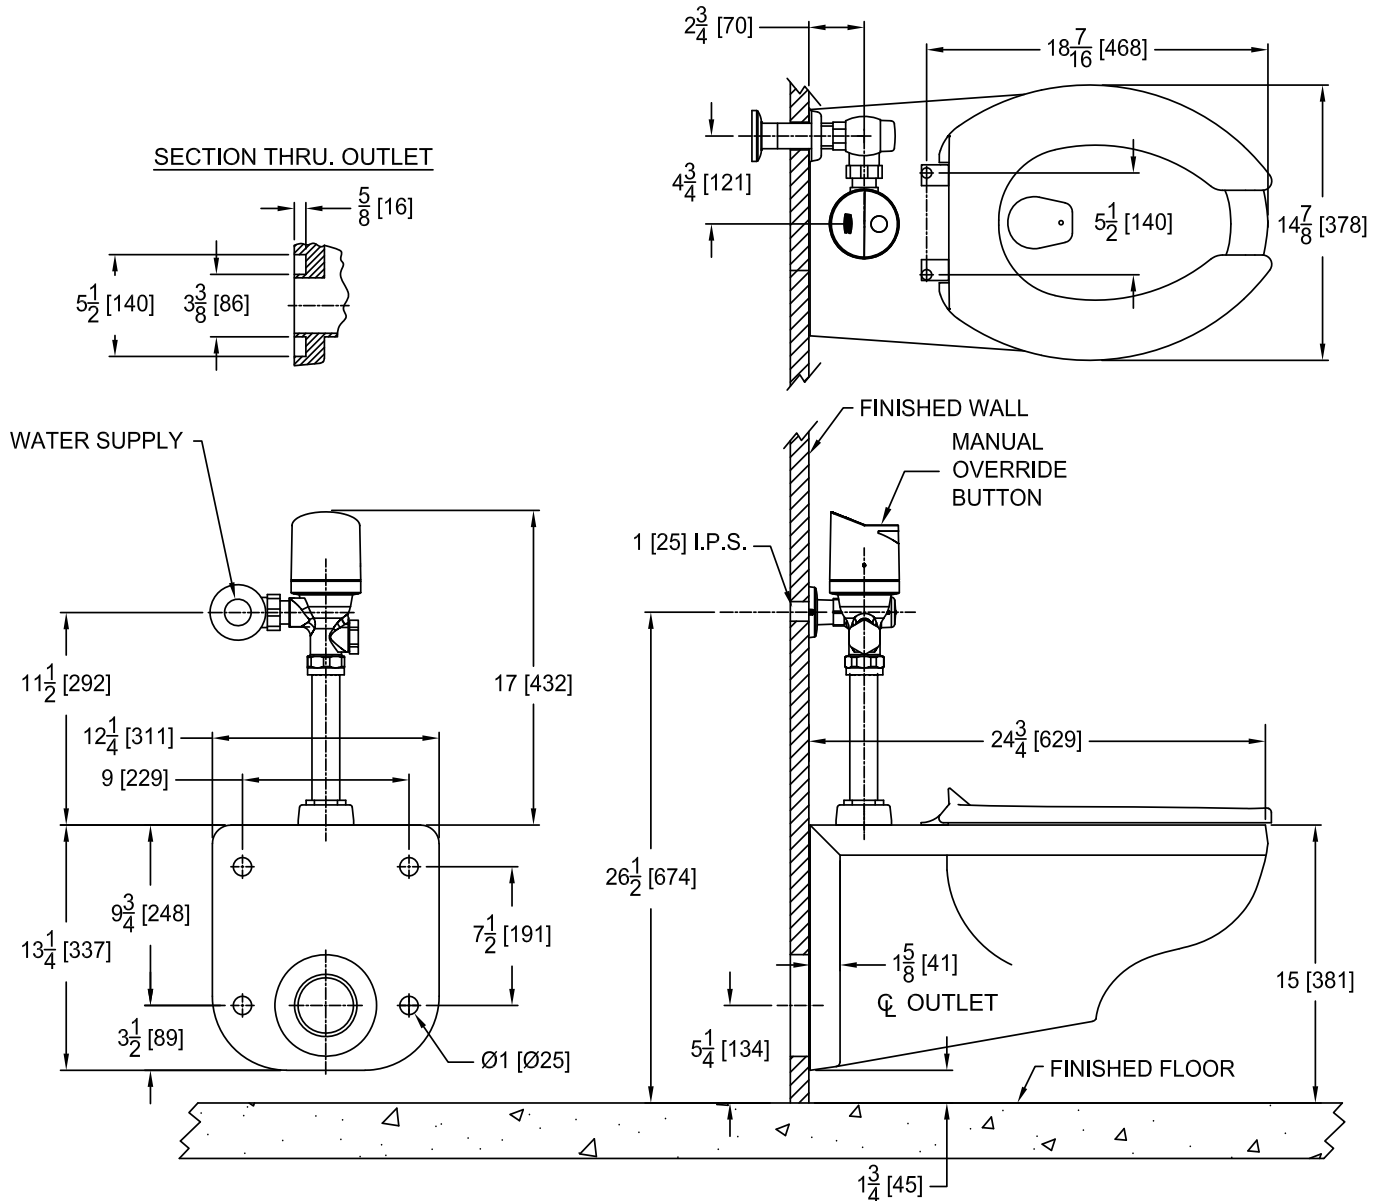

\*Note: For ADA compliance, top of seat height should be installed at 17"-19" from finished floor.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

Fixture - Complies with ASME A119.2 / CSA B45.1