TAG		
170		

#### **ARCHITECTURAL & ENGINEERING SPECIFICATION**

#### Z5655-BWL1

#### **EcoVantage High Efficiency Toilet System**

Vitreous China, 1.1 gpf [4.2 Lpf] or greater high efficiency floor mounted bottom outlet toilet with siphon jet flushing action, elongated front rim with

1-1/2" [39 mm] top spud. This bowl is designed to perform to industry standards with flush volumes of 1.1 gallons per flush.

#### Z5655-BWL1-AM

## **EcoVantage High Efficiency Toilet System**

Vitreous China, 1.1 gpf [4.2 Lpf] or greater high efficiency floor mounted bottom outlet toilet with siphon jet flushing action, ZurnSHIELD™ ceramic glaze and elongated front rim with 1-1/2" [39 mm] top spud. This bowl is designed to perform to industry standards with flush volumes of 1.1 gallons per flush.

## **PRODUCT FEATURES**

#### **Z5655 HET Series**

- Zurn High Efficiency Toilets and paired performance flush valve systems are designed to exceed industry standards, while using as little as 1.1 gallons of
- Universal high efficiency toilet can be specified with 1.1 gpf [4.2 Lpf], 1.28 gpf [4.8 Lpf], 1.6 gpf [6.0 Lpf] or dual flush valves
- Vitreous China
- ${\sf ZurnSHIELD^{TM}}\ ceramic\ glaze\ creates\ a\ permanent\ surface\ that\ protects\ the$ fixture by inhibiting the growth of stain and odor causing mold, mildew, and bacteria, thus reducing the amount of time, chemicals and water needed to clean the bowl
- · Elongated front rim
- 2-1/8" [54 mm] fully glazed trapway
- High efficiency siphon jet flush action
- Shipping Weight: 55 lbs

## COMPLIANCE AND CERTIFICATION:

Complies with ASME A112.19.2 / CSA B45.1



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

NOTE: To ensure system performance:

Minimum Running Water Pressure = 25 psi.



## **VARIANT OPTIONS**

Z5655-BWL1 Z5655 Series top spud toilet Z5655-BWL1-AM Z5655 Series top spud toilet with ZurnSHIELD™ glaze

#### **RECOMMENDED TRIM**

Z5955SS-EL Elongated, standard white, open front toilet seat less cover with stainless steel check hinge Z5972-COMB Closet bolt & wax ring kit


ARCHITECTURAL & ENGINEERING APPROVAL

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.



TAG	•		
IAC	3		

# Rough-in dimensions/Overview dimensions

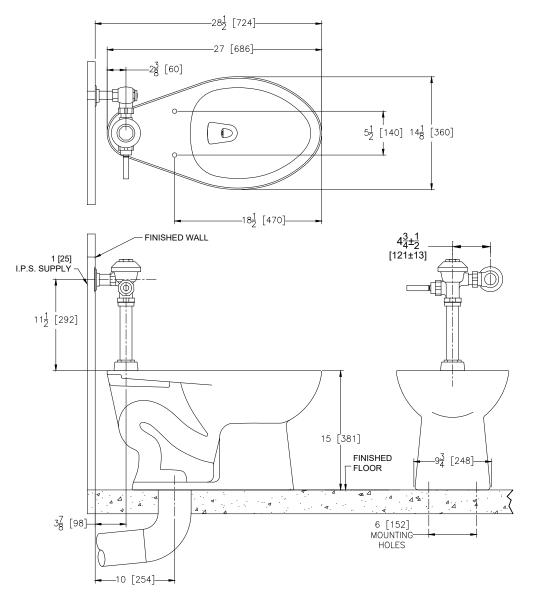

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.

Rev. D | Date: 11/14/23 | C.N. No. 145667 | Prod./Dwg. No. SS Z5655-BWL1