


Z1186OILINTERCEPTOR

SPECIFICATION SHEET

TAG

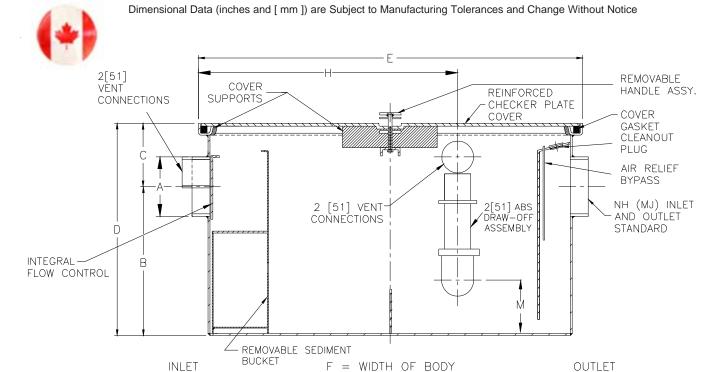

Size	Inlet/ Outlet Size	Flow Rate G.P.M. [L.P.M.]	Approx. Wt. Ibs [kg]	Dimensions In Inches						
				В	С	D	Е	F	Н	М
300	2 [51]	10 [38]	76 [34]	7-1/2 [191]	6 [152]	13-1/2 [343]	20-1/4 [514]	16-1/4 [413]	11-5/8 [295]	3-1/4 [83]
400	3 [76]	15 [57]	76 [34]	7-1/2 [191]	6 [152]	13-1/2 [343]	20-1/4 [514]	16-1/4 [413]	11-5/8 [295]	3-1/4 [83]
500	3 [76]	20 [76]	89 [40]	11-1/2 [292]	6 [152]	17-1/2 [445]	20-1/4 [514]	16-1/4 [413]	13-1/4 [337]	5-1/8 [131]
600	4 [102]	25 [95]	110 [50]	13-1/2 [343]	6 [152]	19-1/2 [495]	20-1/4 [514]	19-1/4 [489]	16 [406]	4-3/4 [121]
700	4 [102]	35 [133]	117 [53]	15-1/2 [394]	6 [152]	21-1/2 [546]	20-1/4 [514]	19-1/4 [489]	16-3/8 [416]	3-5/8 [92]
800	4 [102]	50 [189]	172 [78]	13-1/2 [343]	6 [152]	19-1/2 [495]	32-1/4 [819]	24-1/4 [616]	17-1/4 [438]	3-5/8 [92]

ENGINEERING SPECIFICATION: ZURNZ1186

Dura-Coated interior and exterior fabricated steel oil interceptor, bronze cleanout plug and visible double wall trap seal, removable combination pressure equalizing/flow diffusing baffle and sediment bucket, horizontal baffle, adjustable oil drawoff and vent connections either side, secured gasketed non-skid cover.

OPTIONS (Check/specify appropriate options)

PREFIXES	
Z	Dura-Coated Fabricated Steel*
ZS	All Type 304 Fabricated Stainless Steel w/ Aluminum Cover
ZSS	All Type 304 Fabricated Stainless Steel w/ Stainless Steel Cover
SUFFIXES	
AR	Acid Resistant Coated Fabicated Steel
E	Dura-Coated Interior and Exterior Fabricated Steel Extension Section (Specify 'C' Dim. required) for recessed installation.
HD	Heavy Duty Reinforced Cover
K	Anchor Flange 1-3/4 [44] down from top and 2 [51] wide.
KC	Anchor Flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar.
-L	External Flow Control

Date: 06/11/14 C.N. No. 131092

Prod. | Dwg. No. Z1186

^{*} Regularly furnished unless otherwise specified.