


## Z1201-ND3-XH

EXTRA-HEAVY-DUTY - 750 lbs [340kg] BACK-TO-BACK EZCARRY® ADJUSTABLE HORIZONTAL HIGH PERFORMANCE SIPHON JET NO-HUB WATER CLOSET CARRIER SYSTEM

| <b>'</b> | CIF | ICAI | ION | ЭΠ | ᆮᆮ | I |
|----------|-----|------|-----|----|----|---|
|          |     |      |     |    |    |   |
|          |     |      |     |    |    |   |

TAG

Design and Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

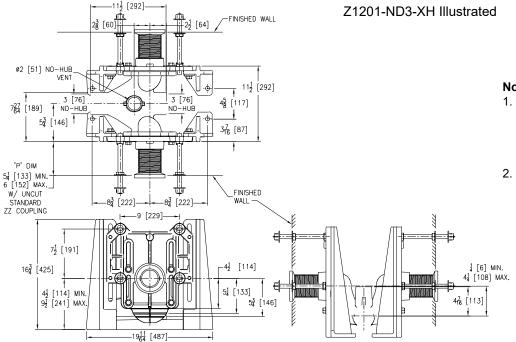

| Product      | Approx. Wt. |  |
|--------------|-------------|--|
| Number       | lbs [kg]    |  |
| Z1201-ND3-XH | 138 [63]    |  |

## Note:

- Z coupling, Min. 'P' Dim.
   Obtainable=2 [51].EZ-Set™
   Coupling, Min. 'P' Dim.
   Obtainable=4-1/4 [108] or 2-1/16
   [52] for 12 [305] NPT.
- Feet bolted to floor using min.1/2[13] dia. anchors.

## **ENGINEERING SPECIFICATION: ZURN Z1201-ND3-XH**

In Canada | Zurn Industries Limited

www.zurn.com

7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

EZCarry® Extra-Heavy-Duty horizontal siphon jet water closet carrier system, with high performance Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep, 3" [76mm] no-hub connections, and extended 2" [51 mm] vent. Corrosion resistant, adjustable 3" [76 mm] dia. X 6" [152 mm] couplings with integral test caps, designed to increase flow velocity and line carry, and labor saving "Neo-Seal" bonded gaskets optimize flow performance while reducing installation steps. Complete system includes adjustable, gasketed faceplates; floor mounted foot supports; extra-heavy-duty ½" [13 mm] rear anchor tie downs; fixture bolts, trim, and stud protectors. EZCarry® XH system complies with all applicable requirements of ASME A112.6.1M up to a 750 lbs [340 kg] maximum static load.

| of ASME A112.6.1M up to a 750 lbs [340 kg] maximum static load.   |                       |  |  |  |  |  |  |
|---|-----------------------|--|--|--|--|--|--|
| OPTIONS (Check/specify appropriate options) Z1201-ND3-XH 3 [762] No-Hub Back-to-Back Inlet (Double)   |                       |  |  |  |  |  |  |
| PREFIXES  Z D.C.C.I. System with Zurn ZZ Adjustable Coupling*  ZQ D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling   |                       |  |  |  |  |  |  |
| SUFFIXES  |                       |  |  |  |  |  |  |
| CC Corrosion Resistant Cast Iron CouplingG  | , ,                   |  |  |  |  |  |  |
| <ul> <li>⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov</li> <li>⚠ ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov</li> <li>⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov</li> </ul> |                       |  |  |  |  |  |  |
| Zurn Industries, LLC   Specification Drainage Operation 1801 Pittsburgh Avenue, Erie, PA USA 16502, Ph. 855.663.9876  | Rev. D Date: 12/20/22 |  |  |  |  |  |  |

C.N. No.

144897

Prod. | Dwg. No. Z1201-ND3-XH

Patent zurn.com/patents