


# Z1202-2HD4

EZCARRY® ADJUSTABLE VERTICAL BACK-TO-BACK HIGH PERFORMANCE SIPHON JET HUB AND SPIGOT WATER CLOSET CARRIER SYSTEM W/TWO SIDE INLETS

SPECIFICATION	ON SHEET

TAG	
IAG	

Design and Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

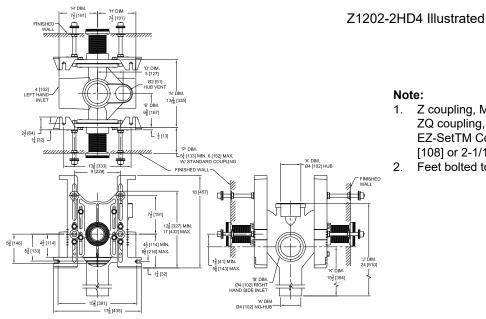

Product	Approx. Wt.	
Number	lbs [kg]	
Z1202-2HD4	154 [70]	

#### Note:

- Z coupling, Min. 'P' Dim. Obtainable = 2 [51]. ZQ coupling, Min. 'P' Dim. Obtainable = 5 [127] EZ-SetTM Coupling, Min. 'P' Dim. Obtainable = 4-1/4 [108] or 2-1/16 [52] for 12 [305] NPT
- Feet bolted to floor using min.1/2 [13] dia. anchors

### **ENGINEERING SPECIFICATION: ZURN Z1202-2HD4**

EZCarry® vertical siphon jet water closet carrier system with high performance waterway and 4" [102mm] hub and spigot connections. System includes Dura-Coated cast iron double main fitting with hydro-mechanically optimized sweep and extended 2" [51mm] vent, with two 4" [102mm] side inlets, adjustable gasketed faceplates, floor mounted pre-fab slotted foot supports with top anchoring pre-fab support base, fixture bolts, trim, stud protectors, bonded "Neo-Seal" gaskets, and corrosion resistant, adjustable 3" [76mm] dia. X 6" [152mm] couplings with integral test caps designed to increase flow velocity and line carry. EZCarry® system complies with the requirements of ASME A112.6.1M up to a 500 lbs [227 kg] static load rating.

## **OPTIONS (Check/specify appropriate options)**

\_ Z1202-2HD4 4 [102] Hub and Spigot Stack, Double Inlets, Two 4 [102] Side Inlets, 2 [51] Vent

### **PREFIXES**

 $_{\mathsf{Z}}$ D.C.C.I. System with Zurn ZZ Adjustable Coupling\*

D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

# **SUFFIXES**

A	Auxiliary Support Assembly	G	Galvanized Cast Iron
	(For 'P' Dim. Greater than 18 [457])	M	Auxiliary Foot Support
CC	Corrosion Resistant Cast Iron Coupling		(for 'P' Dim. 7 thru 18 [178 thru 457])
	(2-1/4 [57] to 12 [305])	RYK17	One Piece Unistrut Pre-Fab Foot
CE	EZ-Set <sup>™</sup> Coupling (NPSM 6 [152] ,12 [305] or custom)	VP	Vandal-Proof Trim
	(NPT 12 [305] or custom)	X2	2 [51] Carrier Foot Extension Assembly
CL	Custom Length Standard Coupling with Integral Test Cap	X3	3 [76] Carrier Foot Extension Assembly
	(Specify Length 4, 8, 10, 12 [102, 203, 254, 305])	45	Finishing Frame for Siphon Jet System
CS	2-1/4 [57] Polymer Coupling with Integral Test Cap	50	Flush Valve Supply Support for Water
F	Mounted, Back Outlet Fixture Support		Closets

<sup>\*</sup> Regularly furnished unless otherwise specified.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ADVERTENCIA: Cáncer y daño reproductivo - <a href="https://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation 1801 Pittsburgh Avenue, Erie, PA USA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited

www.zurn.com

7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

Rev.

Date: 12/26/2022 C.N. No. 144897 Patent zurn.com/patents

Prod. | Dwg. No. Z1202-2HD4