

Z1202-2ND4

EZCARRY® ADJUSTABLE VERTICAL BACK-TO-BACK HIGH PERFORMANCE SIPHON JET NO-HUB WATER CLOSET CARRIER SYSTEM W/ TWO SIDE INLETS

SPECIFICATION SHEET

TAG _____


Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Z1202-2ND4 Illustrated

Product Number	Approx. Wt. lbs [kg]
Z1202-2ND4	126 [57]

Note:

1. Z coupling, Min. 'P' Dim. Obtainable = 2 [51].
ZQ coupling, Min. 'P' Dim. Obtainable = 5 [127]
EZ-Set™ Coupling, Min. 'P' Dim. Obtainable = 4-1/4 [108] or 2-1/16 [52] for 12 [305] NPT
2. Feet bolted to floor using min. 1/2 [13] dia. anchors and back slots on carrier feet.
3. Auxiliary inlet available right (-JR) or left (-JL) or both sides (-JJ) when specified.

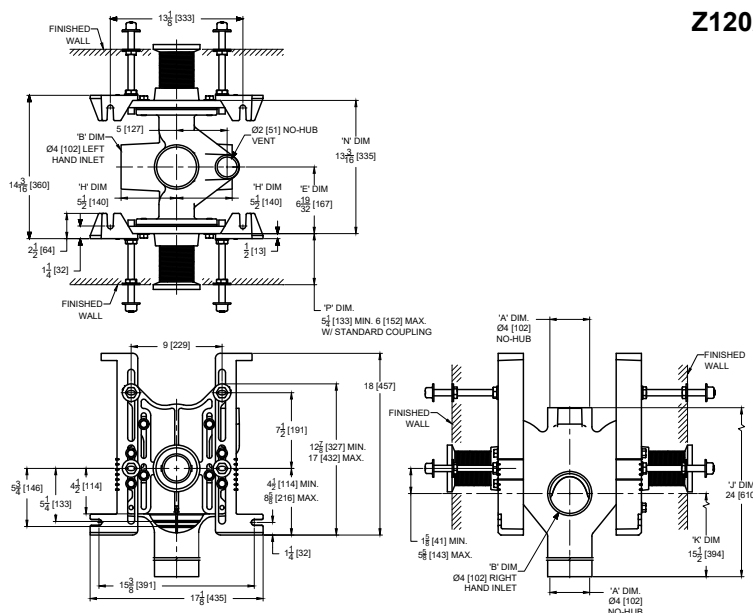

ENGINEERING SPECIFICATION: ZURN Z1202-2ND4

EZCarry® vertical siphon jet water closet carrier system with high performance waterway and 4" [102mm] no-hub connections. System includes Dura-Coated cast iron double main fitting with hydro-mechanically optimized sweep and extended 2" [51mm] vent, with two 4" [102mm] side inlets, adjustable gasketed faceplates, floor mounted pre-fab slotted foot supports with top anchoring prefab support base, fixture bolts, trim, stud protectors, bonded "Neo-Seal" gaskets, and corrosion resistant, adjustable 3" [76mm] dia. X 6" [152mm] couplings with integral test caps designed to increase flow velocity and line carry. EZCarry® system complies with the requirements of ASME A112.6.1M up to a 500 lbs [227 kg] static load rating.

OPTIONS (Check/specify appropriate options)

____ Z1202-2ND4 4 [102] No-Hub Stack, Double Inlets, Two 4 [102] Side Inlets, 2 [51] Vent

PREFIXES

___ Z D.C.C.I. System with Zurn ZZ Adjustable Coupling*

____ ZQ D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

____ -A Auxiliary Support Assembly
(For 'P' Dim. Greater than 1

____ -CC Corrosion Resistant Cast Iron Coupling
(2-1/4 [57] to 12 [305])

____ -CE EZ-Set™ Coupling (NPSM 6 [152], 12 [305] or custom)
(NPT 12 [305] or custom)

____ -CL Custom Length Standard Coupling with Integral Test Cap
(Specify Length 4, 8, 10, 12 [102, 203, 254, 305])

____-CS 2-1/4 [57] Polymer Coupling with Integral Test Cap

_____-F Mounted, Back Outlet Fixture Support

_____ -G

Galvanized Cast Iron

_____ -M

Auxiliary Foot Support

(for 'P' Dim. 7 thru 18 [178 thru 457])

_____-RYK17 One Piece Unistrut Pre-Fab Foot

—-VP Vandal-Proof Trim

____-X2 2 [51] Carrier Foot Extension Assembly

_____ -X3 3 [76] Carrier Foot Extension Assembly

-45 Finishing Frame for Siphon Jet System

_____-50 Flush Valve Supply Support for Water

Closets

* Regularly furnished unless otherwise specified.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠️ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA USA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. H

Date: 01/05/23

C.N. No. 144897

Patent zurn.com/patents

Prod. | Dwg. No. Z1202-2ND4