



**ARCHITECTURAL & ENGINEERING SPECIFICATION**

Sundara® Drift single basin lavatory system manufactured by Zurn Industries. Lavatory shall be mounted at standard height to conform with ANSI, UFAS, TAS and ADA Accessibility Standards. Counter and integral basin to be constructed of Sundara® solid surface resin with aluminum trihydrate and other additives conforming to CSAB45.5/Z124 and IGC 156 standards. Shroud enclosure is constructed of satin finished type 304, 18 gage stainless steel designed for easy access with vandal resistant hardware. Lavatory is furnished complete with 0.5 gpm flow sensor operated faucet (specify model, other gpm outlet also available) and optional liquid or foam soap dispenser (specify model), 1/2" quarter turn supply stops, 3/8" flexible supply risers, chrome 1 1/4" tail piece, and chrome 1 1/4" P-trap for complete system operation.



**PRODUCT FEATURES**

- Sundara® engineered solid surface
- Available in multiple colors
- Matched soap and faucet options
- Stainless steel ADA compliant shroud
- Non-splash basin design
- Left or right side integrated soap hole
- Zurn One orders include all required components for installation and Z8701-9LC-PC P trap along with Z8800-XL-LR-8860-16-PC supply kit with 16" flexible supplies
- Provided with chrome finish faucet, soap dispenser and grid drain. Select faucets available in alternate finishes
- Provided with mounting bracket and wall bracket with necessary hardware for ease of installation
- Integral overflow

**COMPLIANCE AND CERTIFICATION:**

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

- Complies with CSA B45.5 / IAPMO Z124 & IAPMO IGC 156
- ADA Compliant
- UPC Lead Free Compliant
- Complies with
  - ASME A112.18.1/CSA B125.1
  - ASME A112.18.2/CSA B125.2 (applicable to Waste Fitting)
  - ASME A112.6.1M (applicable to Carrier)
  - NSF/ANSI 61-9 (applicable to Faucet)



This product should be used with a WaterSense labeled counterpart with a compatible flow volume to ensure that the entire system meets the requirements for water efficiency and performance.

**PRODUCT DESCRIPTION**

Designed for modern commercial restrooms, the Sundara system delivers a superior user experience in both form and function. Crafted by world-class industrial designers Sundara combines seamless basin designs with curated faucets and soap dispensers, delivering a complete, easy to install hand washing solution.

ARCHITECTURAL & ENGINEERING APPROVAL

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

OPTIONS:

FAUCETS



Z6957-XL-N

BATTERY / BATTERY PLUG-IN


- Battery Powered with Plug-In Power Converter

SENSOR FAUCET MIXING OPTION

- No Mixing
- MV Temperature Mixing Valve for Single Faucet
- TMV Temperature Mixing Valve for Multiple Faucets
- TMV-1 Thermostatic Mixing Valve for Single Faucet

BASIN COLORS (MUST SELECT ONE)

- White (01)
- Snow (02)
- Sea Shell (03)
- High Cliffe (04)
- Sand Storm (05)
- Alluvium (06)
- Frost (07)

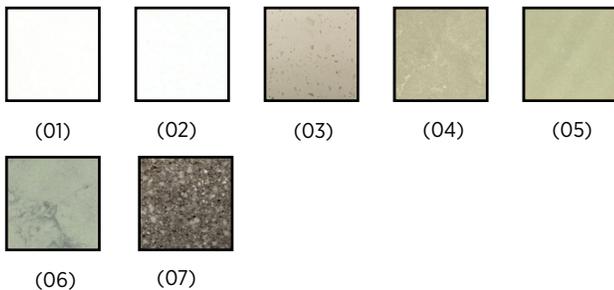

SENSOR SOAP DISPENSER (OPTIONAL)

- SD Liquid Soap Dispenser
- FSD Foaming Soap Dispenser

BATTERY / BATTERY PLUG-IN

- Comes with A/C Adapter
- 4 "D" size alkaline included



Z6957-SD No Soap  
Z6957-FSD


SENSOR FAUCET FLOW RATE OPTIONS

	FLOWRATE GPM [LPM]	VANDAL RESISTANT	WATERSENSE COMPLIANT	CEC, NYC 604.4 COMPLIANT	OUTLET TYPE
<b>Standard</b>	0.5 [1.9]	☑		☑	Spray
<b>-E</b>	1.5 [5.7]	☑	☑		Aerator
<b>-J</b>	1.5 [5.7]	☑	☑		Laminar
<b>-K</b>	1.0 [3.8]	☑	☑		Laminar
<b>-L</b>	1.0 [3.8]	☑	☑		Aerator
<b>-M</b>	0.35 [1.3]	☑		☑	Spray
<b>-N</b>	0.5 [1.9]	☑		☑	Laminar


RECOMMENDED HANGING APPARATUS

- Z1240-EZR Sundara Lavatory carrier

Rough-in/Overview dimensions

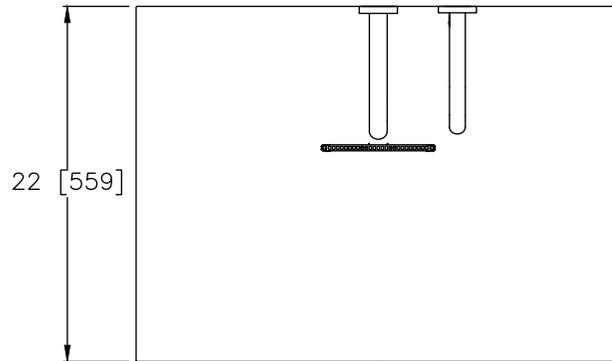


TOP VIEW

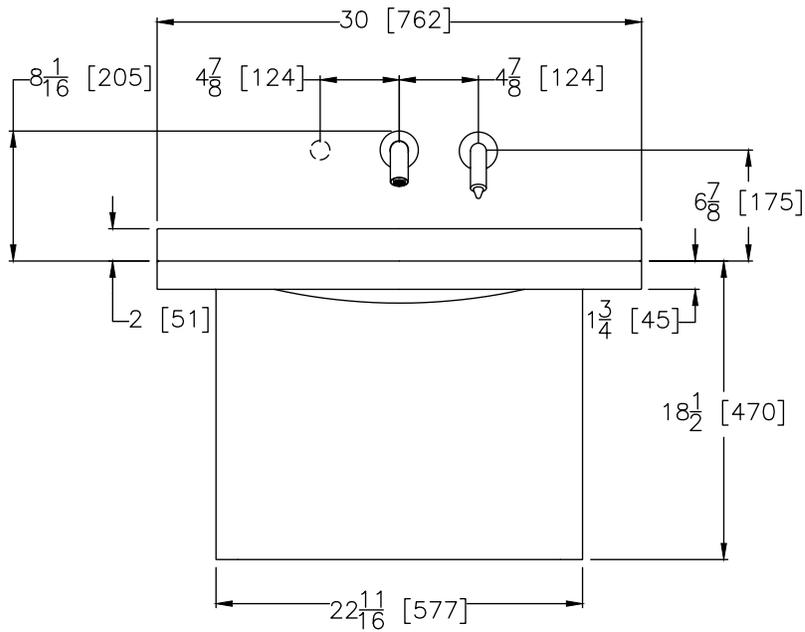

FRONT VIEW

Rough-in/Overview dimensions

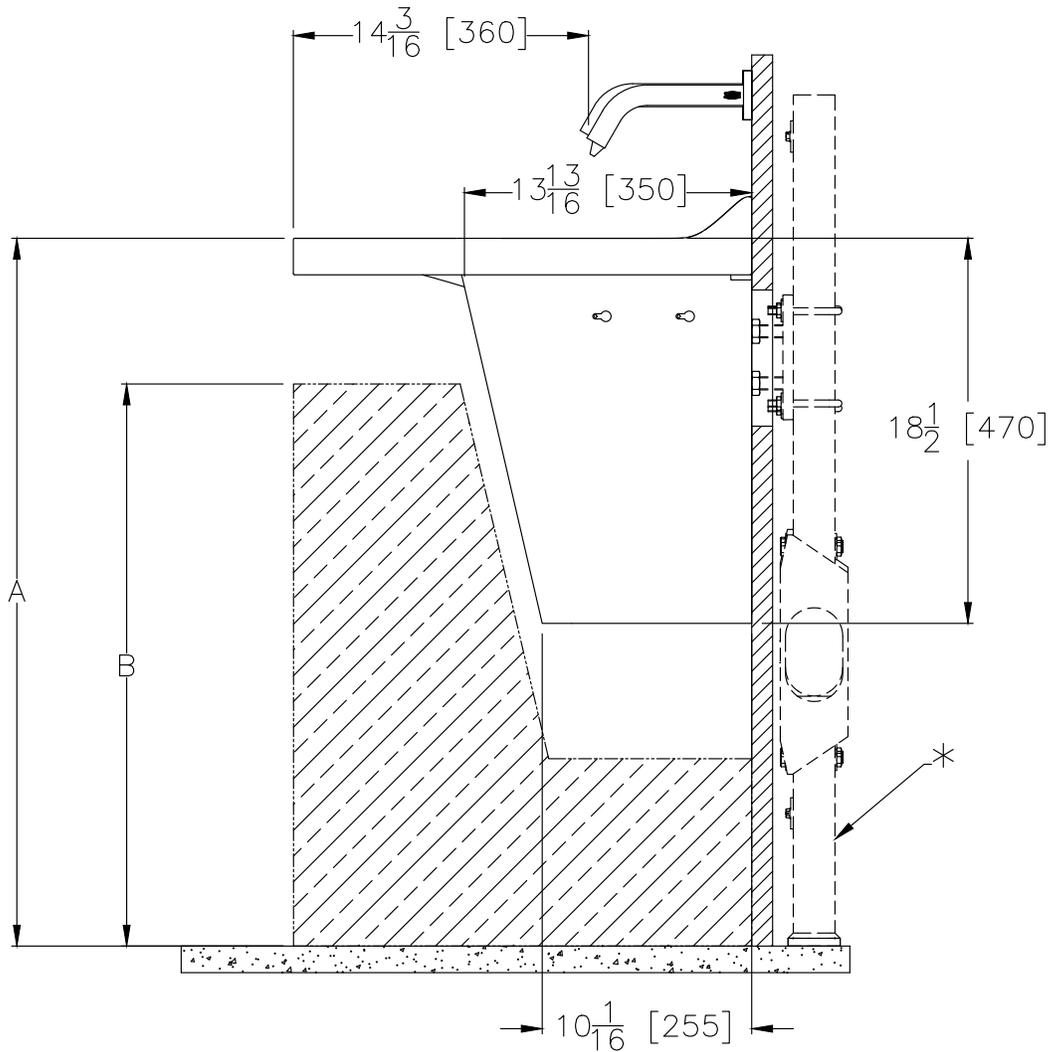


SIDE VIEW

\*Shown with optional Sundara Z1240-EZR-WL

	ADA/TAS Regular Height	ADA/TAS Juvenile Height (Children 6-12 years)	CSA Regular Height	OBC Regular Height
A	34"(863mm)	31"(787mm)	32 1/4 - 33 13/16"(820 - 860mm)	33"(838mm)
B	27"(686mm)	24"(610mm)	26 13/16"(680mm) min.	27"(686mm)

Rough-in/Overview dimensions

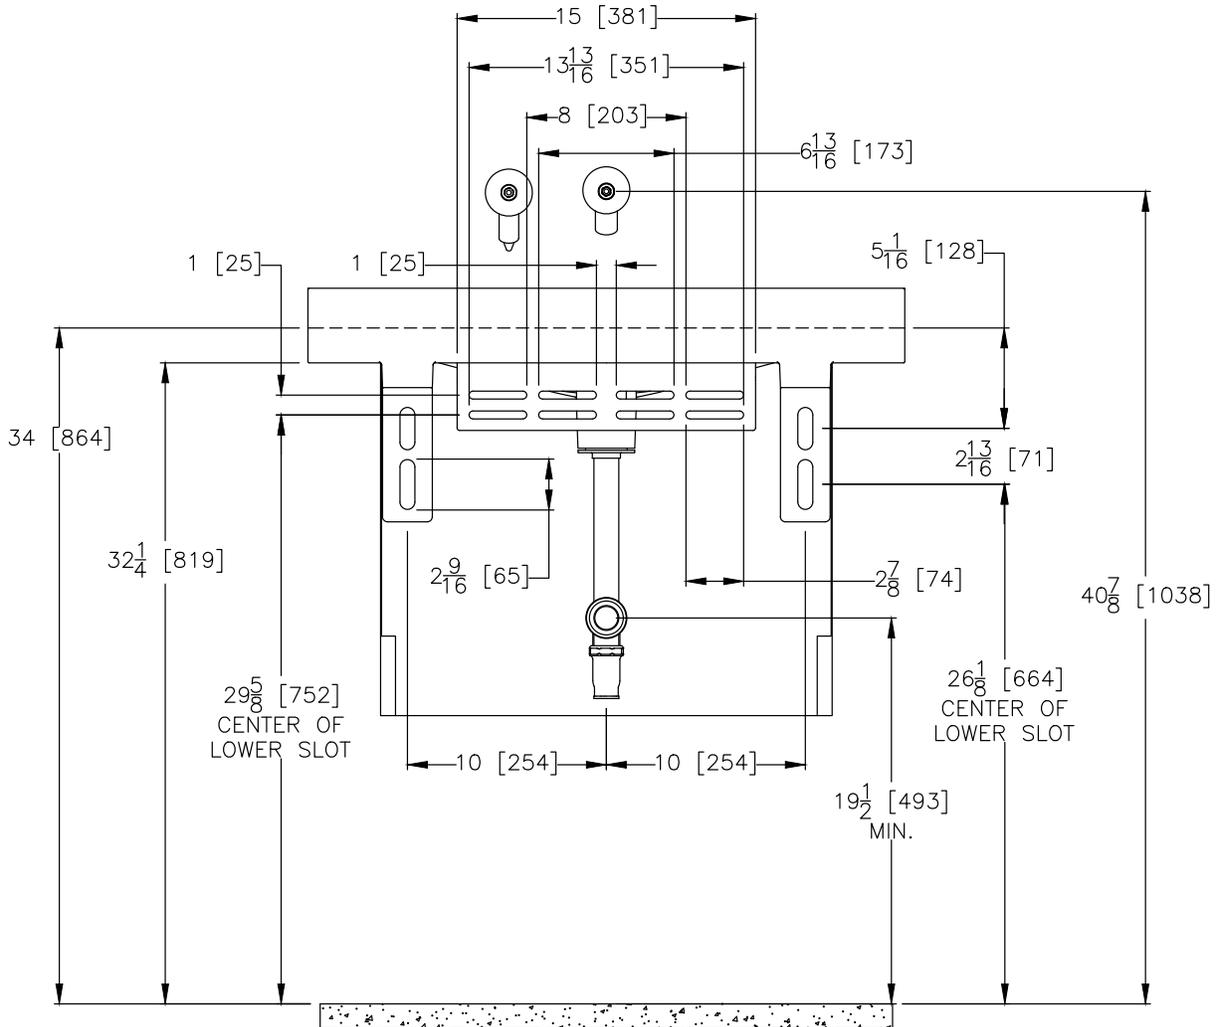

BRACKET VIEW

NOTE: Installing the P-trap outlet lower than 19.5" from the finished floor will prevent the vandal shroud from being installed