


Aquaflush	®
TAG	

Exposed Z6099 Model for Flushing Rim Floor Drain

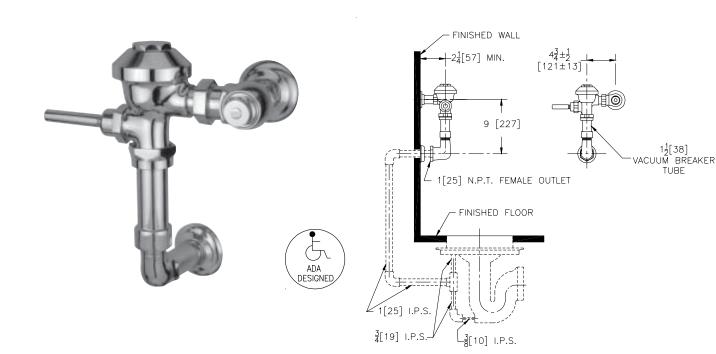

FI	ow Options	
	-WS1	1.6 Gal. Low Consumption
	-FF	4.5 Gal. Ful Flush
	Standard Flush	3.5 Gallons Per Flush

Suffix Options (Check/Specify Appropriate Options)

Garrix Options (Gridoit Opcon) / (ppropriate Op						
BioCare A	DA Handle					
Handle or	Front of Flush Valve					
1" [25] Me	etal Push Button					
3" [76] Me	etal Push Button					
Vandal Re	esistant Stop Cover					
Sweat So	lder Kit					
Cast Wall	Flange					
Other						
3 3 3	BioCare A Handle or 1" [25] Me 3" [76] Me Vandal Re Sweat So Cast Wall					

ENGINEERING SPECIFICATION: ZURN Z6099 Aquaflush Exposed Urinal Flush Valve -Exposed, quiet diaphragm-type, chrome plated flushometer valve with a polished exterior. Complete with a chloramine resistant, dual seal diaphragm with a clog resistant by-pass. The valve is ADA compliant with a non-hold-open and no leak handle feature, high back pressure vacuum breaker, hex coupling nut and adjustable tailpiece. Control stop has internal siphon-guard protection. Internal seals are made of chloramine resistant materials.

Z6099PL	- Aquaflush F	Plus is	furnished a	s specifie	d
above and	includes sweat	solder	kit, vandal	resistant	stop
cap, and ca	ast wall flange.				

This space is for Architectural/engineering Approval

Date: 5/27/03

Product No. Z6099

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292