




ZXN-415-H

BODY ASSEMBLY WITH "TYPE H" STRAINER

TAG _____



Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

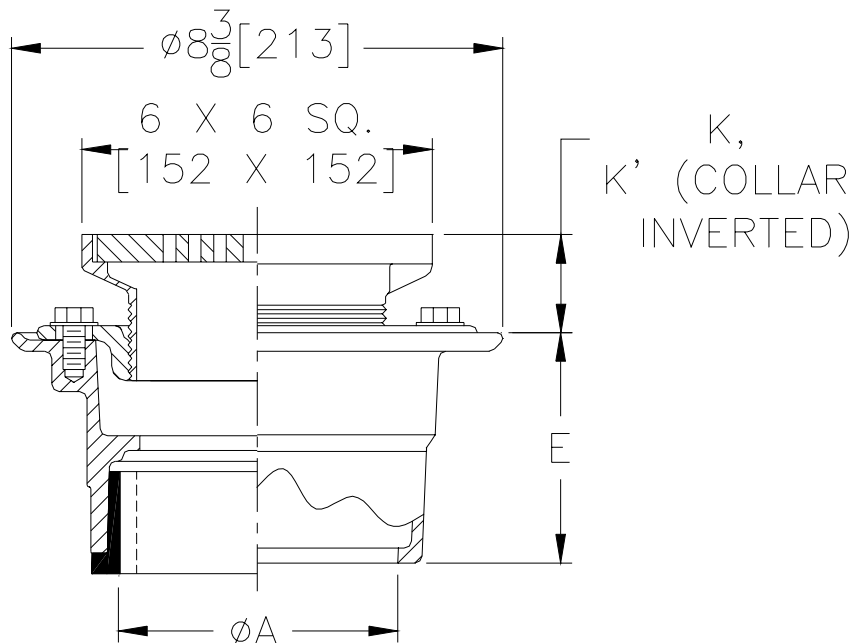

Str. Desig	Dimensions In Inches / [mm]						Approx. Wt. Lbs. / (kg)	Strainer Open Area Sq. In. / [sq cm]
	A Pipe Size	Str. Dia.	K		K'			
			Min.	Max.	Min.	Max.		
-H6	2-3-4-6 [51-76-102-152]	6 x 6 [152 x 152]	1-1/4 [32]	2 [51]	2-1/8 [54]	3-1/4 [83]	15 [7]	3 [19]

ENGINEERING SPECIFICATION: ZURN ZXN-415 Floor and Shower Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "TYPE H" heavy-duty polished nickel bronze strainer.

OPTIONS (Check/specify appropriate options)**PIPE SIZE**(Specify size/type) **OUTLET****'E' BODY HT. DIM.**

2 thru 4 [50 thru 100]	_____	IC	Inside Caulk	3 7/8 [98]
2 thru 4 [50 thru 100]	_____	IG	Inside Gasket	3 7/8 [98]
2 thru 4, 6 [50 thru 100, 152]	_____	IP	Threaded	2 5/8 [67]
2 thru 4 [50 thru 100]	_____	NH	No-Hub	3 7/8 [98]
2 thru 4 [50 thru 100]	_____	NL	Neo-Loc	4 5/8 [117]

SUFFIXES

_____	-AR	Acid Resisting Epoxy Coated Cast Iron
_____	-G	Galvanized Cast Iron
_____	-P	1/2" [13] Trap Primer Connection
_____	-U	1" [25] - 3" [76] High Extension Adapter
_____	-VP	Vandal Proof Secured Top
_____	-X	Squeezin Backwater Valve
_____	-Y	Sediment Bucket
_____	-6NH	6" [152] No-Hub Outlet (6IP w/Z-1040)
_____	-90	2" [51], 3" [76] or 4" [102] Side Outlet Body Assembly (IP or NH only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. DATE: 11/15/99 C.N. NO. 83464

DWG. NO. 65032 PRODUCT NO. ZXN-415-H