
## NOTES:


- FOR GRAVITY APPLICATIONS ONLY.
   ALL PROCEPTOR UNITS ARE MANUFACTURED WITH FIBERGLASS REINFORCED PLASTICS. PHYSICAL FIBERGLASS REINFORCED FLASTICS. FITT SIGAL
  CHARACTERISTICS AND THICKNESS:
  POLYESTER RESIN AND E GLASS
  MINIMUM THICKNESS 1/4" WALL AND 3/8" TOP AND BOTTOM BOWLS.
- 3. ALL PROCEPTOR UNITS ARE TO BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURERS INSTALLATION INSTRUCTION.
- 4. STANDARD PIPING IS SCH. 40 PVC.
- 5. GMC/OMC 500 3000 UNITS COME STANDARD WITH 4" INLET AND
- OUTLET (OTHER PIPE SIZE OPTIONS AVAILABLE ON REQUEST).

  6. EXTENSION COLLAR TO BE ORDERED TO MEET FINISHED GRADE, CUT ON SITE FOR FINAL ADJUSTMENT AND CAULKED WITH SIKAFLEX BY CONTRACTOR FOR WATERTIGHT SEAL.
- 7. COVERS AVAILABLE FOR H20 TRAFFIC LOADING, PEDESTRIAN LOADING OR ABOVE GROUND INSTALLATION.
- 8. CONSULT GREEN TURTLE FOR OTHER SIZES.
  9. 30 YEAR WARRANTY AGAINST LEAKS, AND STRUCTURAL FAILURE.
- 10. U.S. PATENT #5,746,912; CDN PATENT #2,195,822




DETAIL "A"

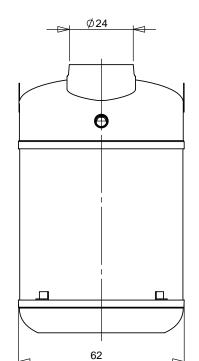

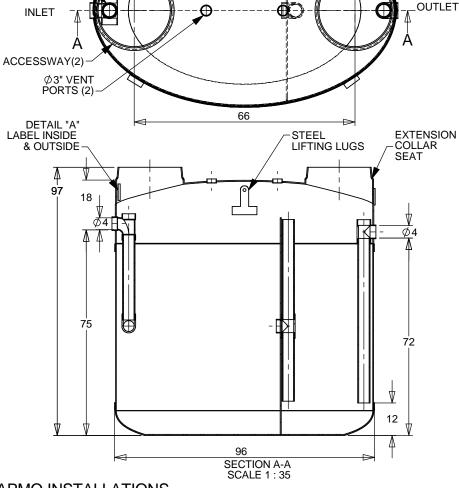

BAFFLE

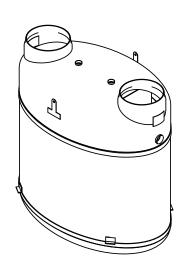

FOR UPC/IAPMO INSTALLATIONS APPROVED UNDER IAPMO / ANSI Z1001-2007 MEETS ASTM C-581

## FOR UPC/IAPMO INSTALLATIONS

**ANCHOR** 

(1 OF 4)

**BRACKET** 

INSPECTION

PORT (2)

	PTOR F.O.G. SEPARATOR	REV	DATE	DRAWN		Proceptor®	
GMC 1300 UPC	GALLON INTERCEPTOR	1	6/15/04	F. CHANDLER		Urocantor	
4"	INLET & OUTLET	2	9/20/05	L. SIMKINS	<i> </i>	1 005001	
24"	ACCESSWAY	3	JANUARY 2, 2007	L. SIMKINS		•	
PROJECT:	WO:	4	MAY 14, 2008	L. SIMKINS		_ (R)	
		5	NOVEMBER 16, 2009	L. SIMKINS	l k	oy greenturtle	
		6	APRIL 3, 2012	L. SIMKINS	by greentuite		
AVAILABLE OPTIONS (CHECKED IF REQUESTED)		7	OCTOBER 01, 2012	S. MANGAT		S 877 428 8187 CAN 877 966 9444	
GREASE SENSOR ALARM		8	FEBRUARY 11, 2013	S. MANGAT			
SUCTION PIPE FOR INDOOR INSTALLATION		9	NOV. 11, 2014		W	ww.greenturtletech.com	
ABOVE GROUND INSTALLATION		10			SIZE	DWG. NO. REV.	
			DRAWN BY: F CHANDLER		Α	GMC 1300 UPC 9	
		DAT	DATE DRAWN: 6/15/04		SCA	ALE:1:30 DO NOT SCALE DRAWING SHEET 1 OF 1	