
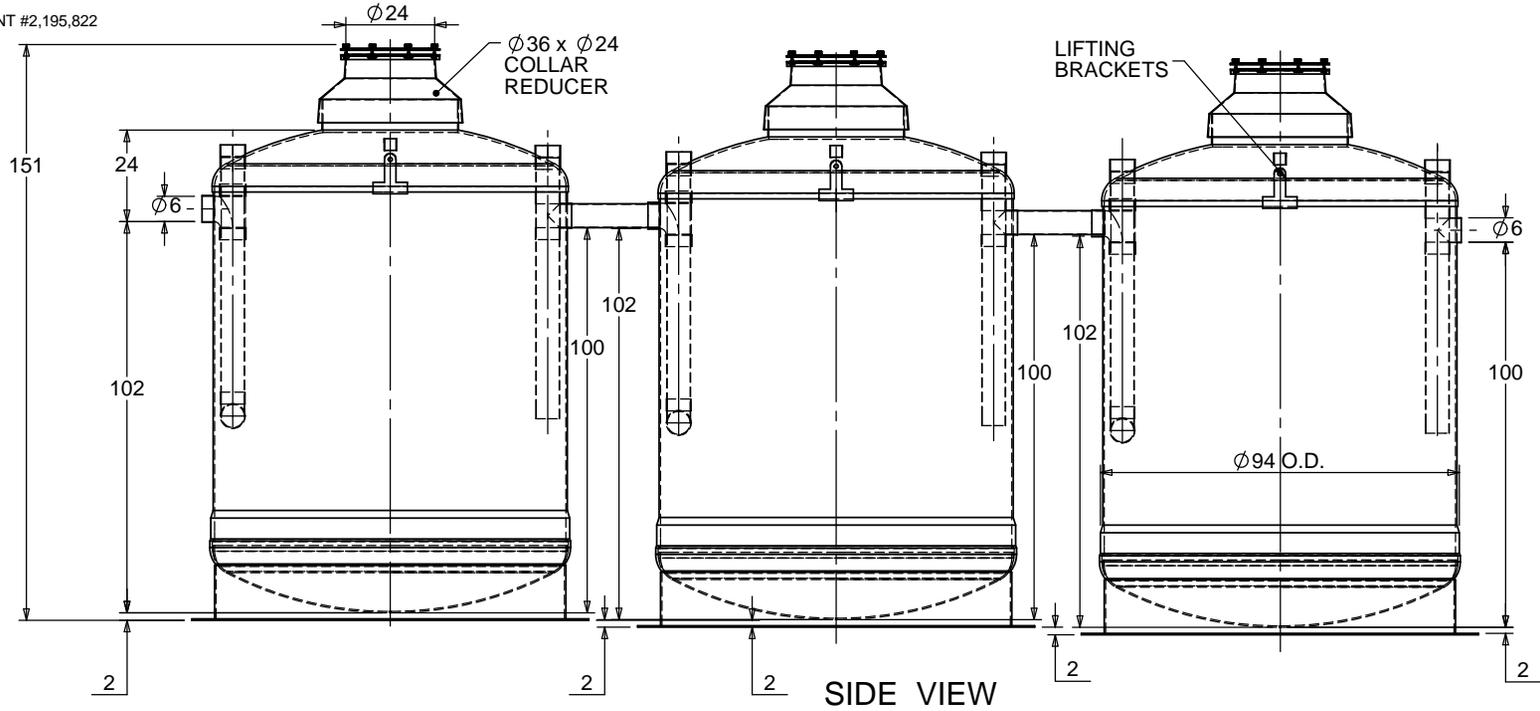


**NOTES:**

1. FOR GRAVITY APPLICATIONS ONLY.
2. ALL PROCEPTOR UNITS ARE MANUFACTURED WITH FIBERGLASS REINFORCED PLASTICS; PHYSICAL CHARACTERISTICS: ISOPHTHALIC POLYESTER RESIN WITH E GLASS.
3. ALL PROCEPTOR UNITS ARE TO BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURERS INSTALLATION INSTRUCTION.
4. STANDARD PIPING IS SCH. 40 PVC.
5. GMC/OMC 4,000 - 10,000 UNITS COME STANDARD WITH 6" INLET AND OUTLET (OTHER PIPE SIZE OPTIONS AVAILABLE ON REQUEST).
6. ADVISE GREEN TURTLE OF INVERT DEPTH; DEEP INSTALLATIONS MAY REQUIRE CUSTOM REINFORCEMENT.
7. EXTENSION COLLAR TO BE ORDERED TO MEET FINISHED GRADE.
8. CUT ON SITE FOR FINAL ADJUSTMENT, AND CAULKED WITH SIKAFLEX BY CONTRACTOR FOR WATERTIGHT SEAL.
9. CONSULT GREEN TURTLE FOR OTHER SIZES.
10. 30 YEAR WARRANTY AGAINST LEAKS, AND STRUCTURAL FAILURE.
11. U.S. PATENT #5,746,912; CDN PATENT #2,195,822

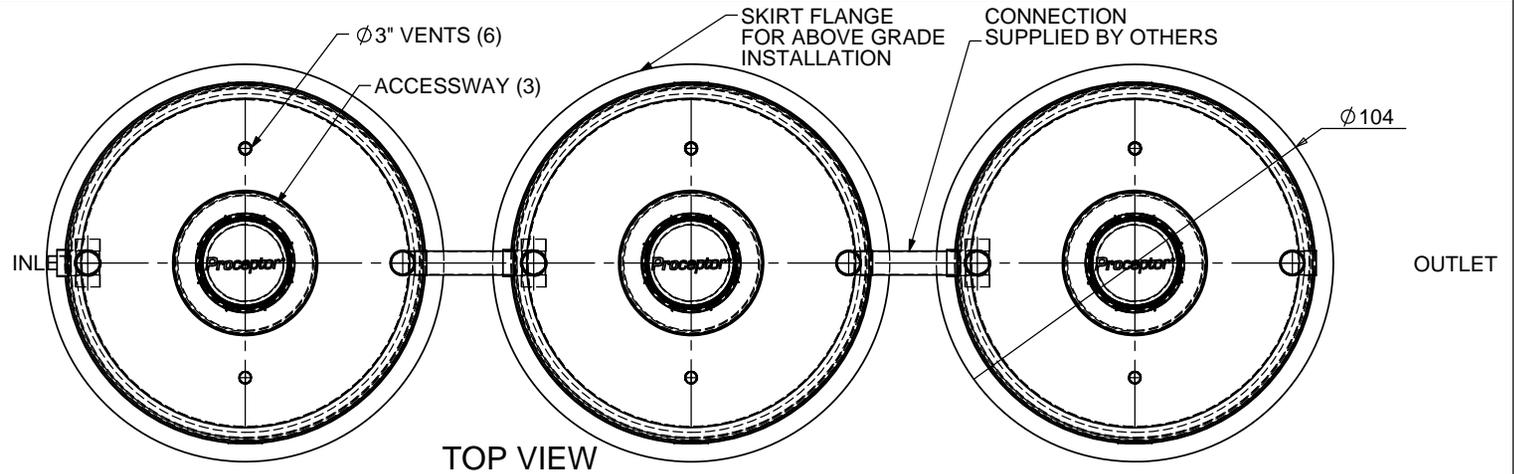

TOTAL WET VOLUME: 8000 GAL  
 MAX. GREASE CAPACITY: 3810 GAL  
 MAX SOLIDS CAPACITY: 2707 GAL

CONSULT LOCAL AUTHORITIES FOR MINIMUM SIZE OF SEPARATORS

TITLE: PROCEPTOR SEPARATOR  
 GMC 8000 GALLON INTERCEPTOR  
 6" INLET & OUTLET  
 24" ACCESSWAY  
 ALL DIMENSIONS IN INCHES  
 PROJECT: WO:

AVAILABLE OPTIONS (CHECKED IF REQUESTED)  
 OIL OR GREASE SENSOR ALARM  
 SUCTION PIPE FOR INDOOR INSTALLATION  
 ABOVE GROUND INSTALLATION

REV	DATE	DRAWN
1	JANUARY 7, 2008	L. SIMKINS
2	NOVEMBER 13, 2009	L. SIMKINS
3		
4	MARCH 29, 2012	L. SIMKINS
5		
6		
7		
8		
9		
10		

DRAWN BY: L. SIMKINS  
 DRAWN DATE: FEBRUARY 9, 2007

**Proceptor**®  
 by greenturtle®  
 US 877 428 8187 CAN 877 966 9444  
 www.greenturtletech.com

SIZE	DWG. NO.	REV.
A	GMC 8000(3)	4
SCALE:1:50	DO NOT SCALE DRAWING	SHEET 1 OF 1