NOTES:

- 1. FOR GRAVITY APPLICATIONS ONLY.
 2. ALL PROCEPTOR® UNITS ARE MANUFACTURED WITH FIBERGLASS REINFORCED PLASTICS. PHYSICAL CHARACTERISTICS AND THICKNESS: POLYESTER RESIN AND E GLASS
- MINIMUM THICKNESS 1/4" WALL AND 3/8" TOP AND BOTTOM BOWLS.

 3. ALL PROCEPTOR® UNITS ARE TO BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURERS INSTALLATION INSTRUCTION.

- WITH THE MANUFACT VIRENS INSTALLATION INSTRUCTION.

 4. STANDARD PIPING IS SCH. 40 PVC.

 5. GMC/OMC/SMC 50 300 UNITS COME STANDARD WITH 4" INLET AND OUTLET (OTHER CUSTOM SIZES AVAILABLE AT EXTRA CHARGE).

 6. EXTENSION COLLAR TO BE ORDERED TO MEET FINISHED GRADE, CUT ON SITE FOR FINAL ADJUSTMENT AND CAULKED WITH SIKAFLEX BY CONTRACTOR FOR WATERTIGHT SEAL.
- 7. COVERS AVAILABLE FOR H20 TRAFFIC LOADING.

- 7. OVVERS AVAILABLE FOR 1221 MAFFIC LOADING,
 PEDESTRIAN LOADING OR ABOVE GROUND INSTALLATION.
 8. CONSULT GREEN TURTLE™ FOR OTHER SIZES.
 9. 30 YEAR WARRANTY AGAINST LEAKS, AND STRUCTURAL FAILURE.
- 10. U.S. PATENT #5,746,912; CDN PATENT #2,195,822



PROCEPTOR MODEL NUMBER: OMC 1000 UPC LIQUID CAPACITY (WORKING VOLUME): 1000 US GAL. RATED FLOW: STD. MAX BURIAL DEPTH TO TOP OF TANK:

MAX VERTICAL LOAD: MONTH/YEAR OF MANUFACTURE:

Ø24


 \oplus

62


FOR UPC/IAPMO INSTALLATIONS

1133 PSF

DETAIL "A"

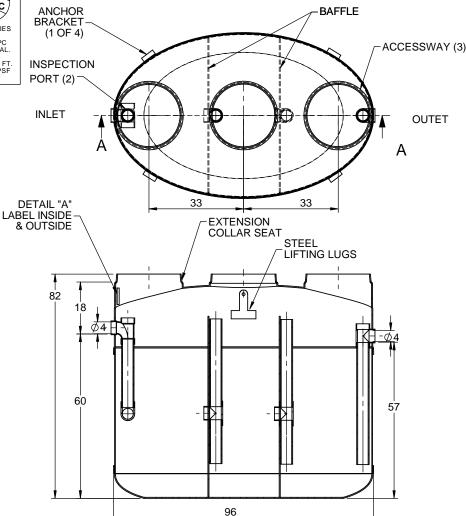

SECTION A-A SCALE 1:35



MANUFACTURED IN COMPLIANCE WITH IAPMO PS 80-2008

| TITLE: PRO | CEPTOR OIL SEPARATOR | REV | DATE | DRAWN | Г | 7 | oceptor® | R) |
|--|----------------------|-----|----------------------|-------------|-----------------|---------|-----------------------------------|------|
| OMC 1000 UPC GALLON INTERCEPTOR | | 1 | 6/15/04 | F. CHANDLER | J ⊩ | 7ri | OCADIOL: | |
| 4" | INLET & OUTLET | 2 | 9/15/5 | L. SIMKINS | | 1, | | |
| 24" | ACCESSWAY | 3 | 12/20/5 | L. SIMKINS | | | <u>-</u> | |
| PROJECT: | WO. | 4 | DEC. 27, 2006 | L. SIMKINS | by greenturtle® | | | |
| PROJECT: | WO: | 5 | MAY 14, 2008 | L. SIMKINS | | | | |
| | | 6 | NOVEMBER 17, 2009 | L. SIMKINS | by greentaine | | | |
| AVAILABLE OPTIONS (CHECKED IF REQUESTED) | | 7 | APRIL 4, 2012 | L. SIMKINS |] บร | S 877 | 428 8187 CAN 877 966 9444 | |
| OIL/GREASE SENSOR ALARM | | 8 | FEBRUARY 14, 2013 | S. MANGAT | | | greenturtletech.com | |
| SUCTION PIPE FOR INDOOR INSTALLATION | | 9 | JULY 16, 2015 | | ٧٧ | vv vv . | greenturiletech.com | |
| ABOVE GROUND CONFIGURATION | | 10 | | | SIZE | DWG. N | NO. | REV. |
| DOUBLE WALL CONSTRUCTION | | | DRAWN BY: F CHANDLER | | | ÖM | ĬČ 1000 UPC | 9 |
| | | | DATE DRAWN: 6/15/04 | | | E:1:35 | DO NOT SCALE DRAWING SHEET 1 OF 1 | |