

- 1. FOR GRAVITY APPLICATIONS ONLY.
- 2. ALL PROCEPTOR UNITS ARE MANUFACTURED WITH FIBERGLASS REINFORCED PLASTICS. PHYSICAL
- FIBERGLASS REINFORCED FLASTICS. PRITSICAL
 CHARACTERISTICS AND THICKNESS:
 POLYESTER RESIN AND E GLASS
 MINIMUM THICKNESS 1/4" WALL AND 3/8" TOP AND BOTTOM BOWLS.
 3. ALL PROCEPTOR UNITS ARE TO BE INSTALLED IN ACCORDANCE
 WITH THE MANUFACTURERS INSTALLATION INSTRUCTION.
- 4. STANDARD PIPING IS SCH. 40 PVC.
- 5. GMC/OMC 500 3000 UNITS COME STANDARD WITH 4" INLET AND OUTLET (OTHER PIPE SIZE OPTIONS AVAILABLE ON REQUEST).
- 6. EXTENSION COLLAR TO BE ORDERED TO MEET FINISHED GRADE, CUT ON SITE FOR FINAL ADJUSTMENT AND CAULKED WITH SIKAFLEX BY CONTRACTOR FOR WATERTIGHT SEAL.
- 7. COVERS AVAILABLE FOR H20 TRAFFIC LOADING,
- PEDESTRIAN LOADING OR ABOVE GROUND INSTALLATION.
- CONSULT GREEN TURTLE FOR OTHER SIZES.
 30 YEAR WARRANTY AGAINST LEAKS, AND STRUCTURAL FAILURE. 10. U.S. PATENT #5,746,912; CDN PATENT #2,195,822


DETAIL "A"




MANUFACTURER: GREEN TURTLE TECHNOLOGIES

OMC 1300 UPC PROCEPTOR MODEL NUMBER: LIQUID CAPACITY (WORKING VOLUME): 1300 US GAL. RATED FLOW: 1133 PSF

STD. MAX BURIAL DEPTH TO TOP OF TANK: MAX VERTICAL LOAD: MONTH/YEAR OF MANUFACTURE:

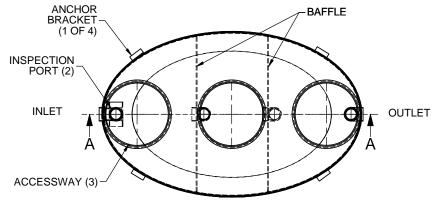

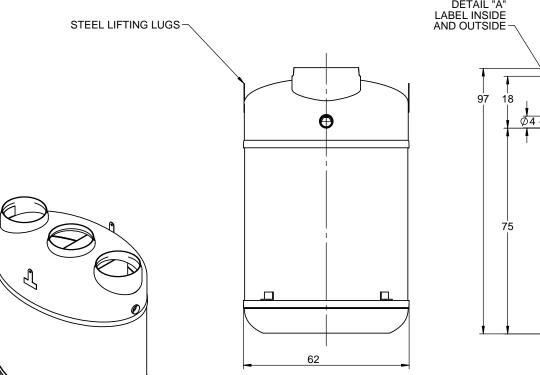

EXTENSION DETAIL "A" COLLAR SEAT Ø4 - \Box 72 **SECTION A-A** SCALE 1:35

MANUFACTURED IN COMPLIANCE WITH IAPMO PS 80-2008

Proceptor®
by greenturtle®
US 877 428 8187 CAN 877 966 9444 TITLE: **PROCEPTOR** REV DATE DRAWN OMC 1300 UPC GALLON INTERCEPTOR 1 6/15/04 F. CHANDLER **INLET & OUTLET** 9/15/05 **ACCESSWAYS** DEC. 27, 2006 .. SIMKINS SEPTEMBER 15, 2009 .. SIMKINS PROJECT: WO: NOVEMBER 17, 2009 . SIMKINS APRIL 5, 2012 .. SIMKINS AVAILABLE OPTIONS (CHECKED IF REQUESTED) FEBRUARY 14, 2013 S. MANGAT OIL/GREASE SENSOR ALARM JULY 17, 2015 www.greenturtletech.com SUCTION PIPE FOR INDOOR INSTALLATION COALESCER (FOR OIL ONLY)10ppm TREATMENT SIZE DWG. NO. REV. DOUBLE WALL CONSTRUCTION **A** OMC 1300 DRAWN BY: F CHANDLER 8 SCALE:1:35 DO NOT SCALE DRAWING SHEET 1 OF 1 DATE DRAWN: 6/15/04