


GMC/OMC 1000(2), 1500(2), 2000(2), 2600(2) AND 3000(2) INSTALLATION DRAWING

NOTES:

1. REFER TO INSTALLATION PROCEDURE AND INSTALLATION CHECKLIST.
2. PROCEPTOR SEPARATORS MUST BE INSTALLED IN ACCORDANCE WITH ALL RELEVANT FEDERAL, PROVINCIAL/STATE, AND LOCAL CODES INCLUDING LOCAL PLUMBING CODE.
3. US PATENT # 5,746,912; CDN PATENT # 2,195,822

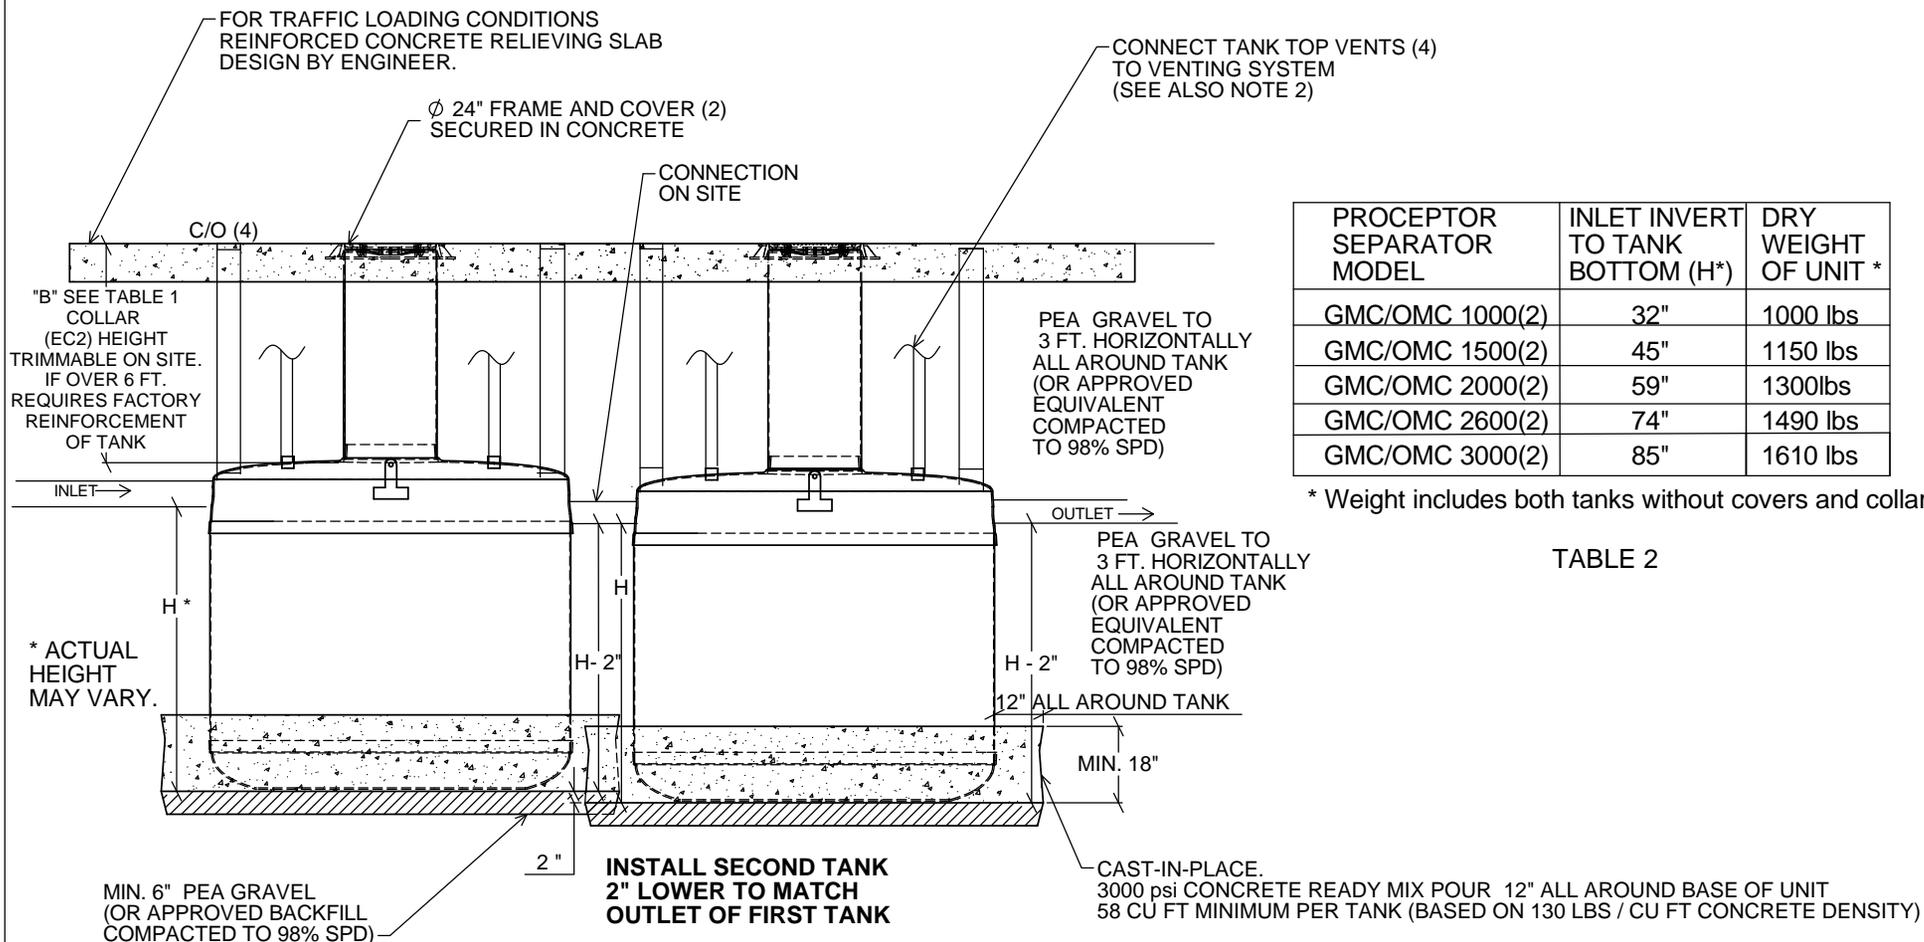

PROCEPTOR SEPARATOR MODEL	INLET INVERT TO TANK BOTTOM (H*)	DRY WEIGHT OF UNIT *
GMC/OMC 1000(2)	32"	1000 lbs
GMC/OMC 1500(2)	45"	1150 lbs
GMC/OMC 2000(2)	59"	1300lbs
GMC/OMC 2600(2)	74"	1490 lbs
GMC/OMC 3000(2)	85"	1610 lbs

* Weight includes both tanks without covers and collars

TABLE 2

TABLE 1

BURIAL DEPTH	B
Max.	6 FT.
Min. with Traffic	18"
Min. no Traffic	12"

** ESTIMATED MINIMUM SPACE REQUIRED TO FIT VENT ELBOWS UNDER FLOOR

TITLE: PROCEPTOR OIL AND GREASE SEPARATOR		REV	DATE	DRAWN
INSTALLATION DRAWING FOR GMC/OMC MODEL 1000(2)-3000(2)		1	SEPTEMBER 13, 2007	L. SIMKINS
ALL DIMENSIONS IN INCHES		2	NOVEMBER 13, 2009	L. SIMKINS
PROJECT: WO:		3	JULY 20, 2010	L. SIMKINS
		4	APRIL 26, 2011	L. SIMKINS
		5	DECEMBER 14, 2012	S. MANGAT
		6	APRIL 23, 2013	S. MANGAT
		7	APRIL 20, 2015	
		8	MAY 16, 2017	
		9		
		10		
DRAWN BY: L. SIMKINS		SCALE: 1:60		
DRAWN DATE: JANUARY 31, 2007		DO NOT SCALE DRAWING		



SIZE	DWG. NO.	REV.
A	INSTALL GMC OMC 1000(2)-3000(2)	8
SCALE: 1:60		SHEET 1 OF 1