




Z1172 LARGE CAPACITY GREASE INTERCEPTOR

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

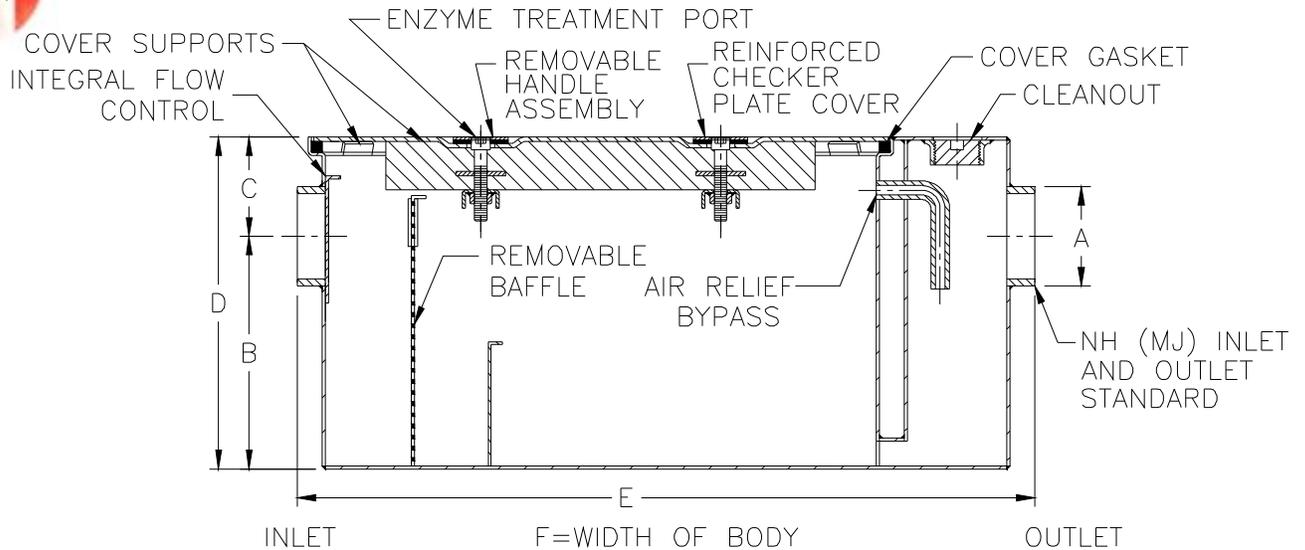

Size	Inlet / Outlet Size	Flow Rate GPM [L]	Grease Cap. LB [KG]	Approx. Wt. Lbs. [kg]	No. of Covers	Dimensions In Inches / [mm]				
						B	C	D	E	F
1000	4 [102]	100 [379]	200 [91]	289 [131]	1	23 [584]	4 [102]	27 [686]	41-3/4 [1060]	33-5/8 [854]
1100		125 [473]	250 [114]	536 [243]	2	24-1/2 [622]	5-5/8 [143]	30-1/8 [765]	48-1/4 [1226]	40 [1016]
1200		150 [568]	300 [136]	616 [279]	2	25-1/4 [641]	5-1/2 [140]	30-3/4 [781]	55 [1397]	41-5/8 [1057]
1300		200 [757]	400 [182]	738 [335]	2	29-7/8 [759]	5-5/8 [143]	35-1/2 [902]	60 [1524]	43-5/8 [1108]
1400		250 [946]	500 [227]	924 [419]	2	36 [914]	5 [127]	41 [1041]	70 [1778]	51-5/8 [1311]
1500	6 [152]	300 [1136]	600 [272]	1700 [771]	2	39-5/8 [1006]	6-5/8 [168]	46-1/4 [1175]	79 [2007]	58-5/8 [1489]
1600		350 [1325]	700 [318]	1890 [857]	2	43-7/8 [1114]	6-5/8 [168]	50-1/2 [1283]	86 [2184]	63-5/8 [1616]
1700		400 [1514]	800 [363]	2150 [975]	3	47-5/8 [1210]	6-5/8 [168]	54-1/4 [1378]	93 [2362]	70-1/4 [1784]
1800		450 [1703]	900 [409]	2300 [1043]	3	48-5/8 [1235]	6-5/8 [168]	55-1/4 [1403]	99 [2515]	75-1/4 [1911]
1900		500 [1893]	1000 [464]	2400 [1089]	3	51-5/8 [1311]	5-5/8 [143]	57-1/4 [1454]	103 [2616]	77-1/4 [1962]

ENGINEERING SPECIFICATION: ZURN Z1172

Large capacity Dura-Coated interior and exterior fabricated steel grease interceptor, rated at ____ GPM and ____ Lbs. grease capacity, with internal air relief by-pass, cleanout plug and visible double wall trap seal with removable pressure equalizing/flow diffusing baffle. Gasketed non-skid secured cover and bronze cleanout plug complete with flow control fitting.

OPTIONS (Check/specify appropriate options)

Note: Location of outlet from bottom of interceptor cannot be changed.

PREFIXES

- ___ Z Dura-Coated Fabricated Steel*
- ___ ZS All Type 304 Fabricated Stainless Steel w/ Aluminum Cover
- ___ ZSS All Type 304 Fabricated Stainless Steel w/ Stainless Steel Cover

SUFFIXES

- ___ -AR Acid Resistant Coated Fabricated Steel
- ___ -CC 8 [203] Diameter Cleanout Cover
- ___ -DI Dual High/Low Inlet
- ___ -E Dura-Coated Exterior Fabricated Steel Extension Section (Specify 'C' Dim. required) for recessed installation.
- ___ -HD Heavy-Duty Traffic Cover rated at 10,000 lbs. [4536 kg.] maximum safe live load.
- ___ -K Anchor flange 1-3/4 [44] down from top and 2 [51] wide. No Extension required to accommodate -K option.
- ___ -KC Anchor flange 1-3/4 [44] down from top and 2 [51] wide with clamp collar. No Extension required to accommodate -KC option.
- ___ -L Angle type (Z1108-L) Flow Control Device.

REV. C	DATE: 09/6/11	C.N. NO. 121629
DWG. NO. 65073	PRODUCT NO. Z1172	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514

Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292