



Z135-6


8 [203] MAIN ROOF DRAIN FOR CONVENTIONAL INVERTED PROMENADE DECK ROOF

SPECIFICATION SHEET

TAG _____



Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

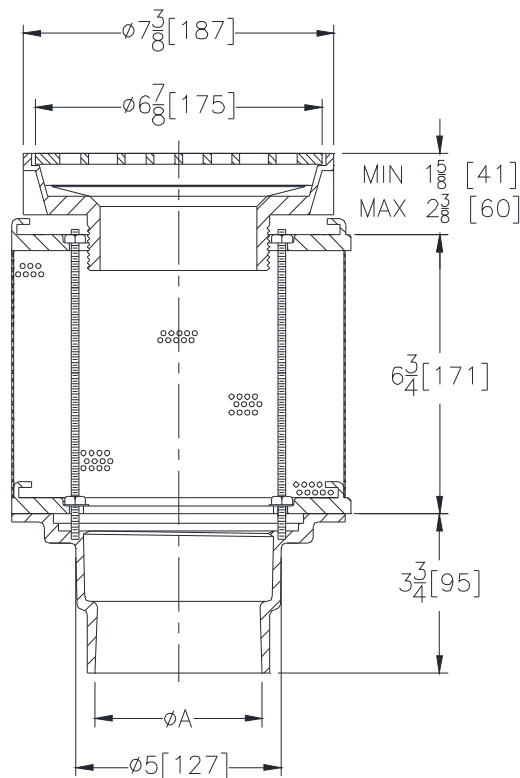

A Pipe Size Inches / [mm]	Approx. Wt. Lbs. / [kg]	Dome Open Area Sq. In. / [sq cm]
2-3-4 [51-76-102]	15 [7]	12 [77]

ENGINEERING SPECIFICATION: ZURN Z135-6

8 [203] diameter drain for conventional inverted promenade deck roof. Dura-Coated cast iron body, adjustable head, round grate, cast iron strainer collar and flashing clamp collar. Stainless steel drainage extension and hardware.

OPTIONS (Check/specify appropriate options)**PIPE SIZE**

2-3-4 [51-76-102]

OUTLET (Specify size/type)

_____ NH No-Hub

PREFIXES

_____ Z D.C.C.I. Body with C. I. Strainer
_____ ZN D.C.C.I. Body with Polished Nickel Bronze Grate

SUFFIXES

_____ -A Waterproof Flange
_____ -C Underdeck Clamp
_____ -G Galvanized Cast Iron
_____ -R Roof Sump Receiver
_____ -T Square Top
_____ -Y Sediment Bucket

* Regularly furnished unless otherwise specified.