



Model Z5615.446.00.00.00

1.1 GPF Elongated Wall Hung EcoVantage®

Hardwired Sensor Flush Valve Toilet System

TAG _____

Z5615 HET Series

- Zurn One HET Toilet System designed for optimal performance between Zurn fixture and Zurn flush valve to save water.
- 1.1 gpf (gallons per flush)
- 14% water savings over standard 1.28 gpf system
- 31% water savings over standard 1.6 gpf system
- Vitreous china
- Top Spud/Exposed System
- Hardwired Sensor Flush Valve Operation
- Elongated front rim
- 2-1/8" fully glazed trapway
- High efficiency siphon jet flush action
- Zurn product system component compatibility and quality assurance
- Shipping Weight: 50 lbs.

Suffix Options:

- ☐ -RF Retro-Fit Nut Kit for extending carrier studs from existing wall.

Recommended Carrier:

- ☐ Z1201 or Z1202 EZCarry™ 500 lbs load rated High Efficiency Carrier

Recommended Trim:

- ☐ Z5955SS-EL Elongated, standard white, open front toilet seat less cover with stainless steel check hinge.

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6000-PC6 PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE. ORDER POWER CONVERTERS SEPARATE, AND ONE POWER CONVERTER OPERATES UP TO EIGHT VALVES.

Note: To ensure system performance:

Minimum Running Water Pressure = 25 psi.



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

In Canada - Consult local codes and standards.

EcoVantage® is a registered trademark of Zurn Industries

All dimensions and specifications are subject to change without notice.



Zurn Industries, LLC
5900 Elwin Buchanan Drive, Sanford, NC U.S.A. 27330 · Ph. 1-800-997-3876, Fax 919-775-3541

In Canada | Zurn Industries Limited
7900 Goreway Drive Unit 10, Brampton, Ontario L6T5W6 · Ph. 905-405-8272, Fax 905-405-1292

www.zurn.com



Z5615 Series Elongated (shown with seat)

Engineering Specification

Z5615.446 EcoVantage® High Efficiency Toilet System -

System comes complete with exposed ZEMS6000AV-ONE-1S, high efficiency sensor operated hardwired flushometer valve, and vitreous china wall-hung toilet. The system is designed to perform to industry standards with as little as 1.1 gallons per flush. Valve is exposed, quiet diaphragm-type, chrome plated, flushometer valve with a polished exterior, complete with Zurn's AquaVantage® TPE, chloramine resistant, dual seal diaphragm with clog-resistant, filtered by-pass. The valve incorporates a motorized actuator, an integral infrared convergence-type proximity sensor, and a manual push-button override into an all-metal, polished chrome plated housing. Sensor range automatically adjusts to its environment at power up and is powered by a 7.6 VDC power converter. This valve is equipped with the ability to provide a 48 hour courtesy flush if desired. Each power converter can accommodate up to eight flush valves. The valve is complete with high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection, vandal resistant stop cap, sweat solder kit, and a cast wall flange with set screw. Internal seals are made of chloramine resistant materials. Vitreous china toilet is 1-1/2" top spud with 2-1/8" fully glazed trapway with siphon jet action. Valve and toilet are an engineered system designed to provide optimal performance and 31% water savings over 1.6 gpf conventional toilets.

This space is for Architectural/engineering Approval

Rev. -
Date: 2/15/2017
C.N. No. SAN007459
Prod. | Dwg. No. 315914



Model Z5615.446.00.00.00


1.1 GPF Elongated Wall Hung EcoVantage®

Hardwired Sensor Flush Valve Toilet System

TAG _____

Rough-in dimensions for Z5615 Series

- Z5615.446.00.00.00 with top spud

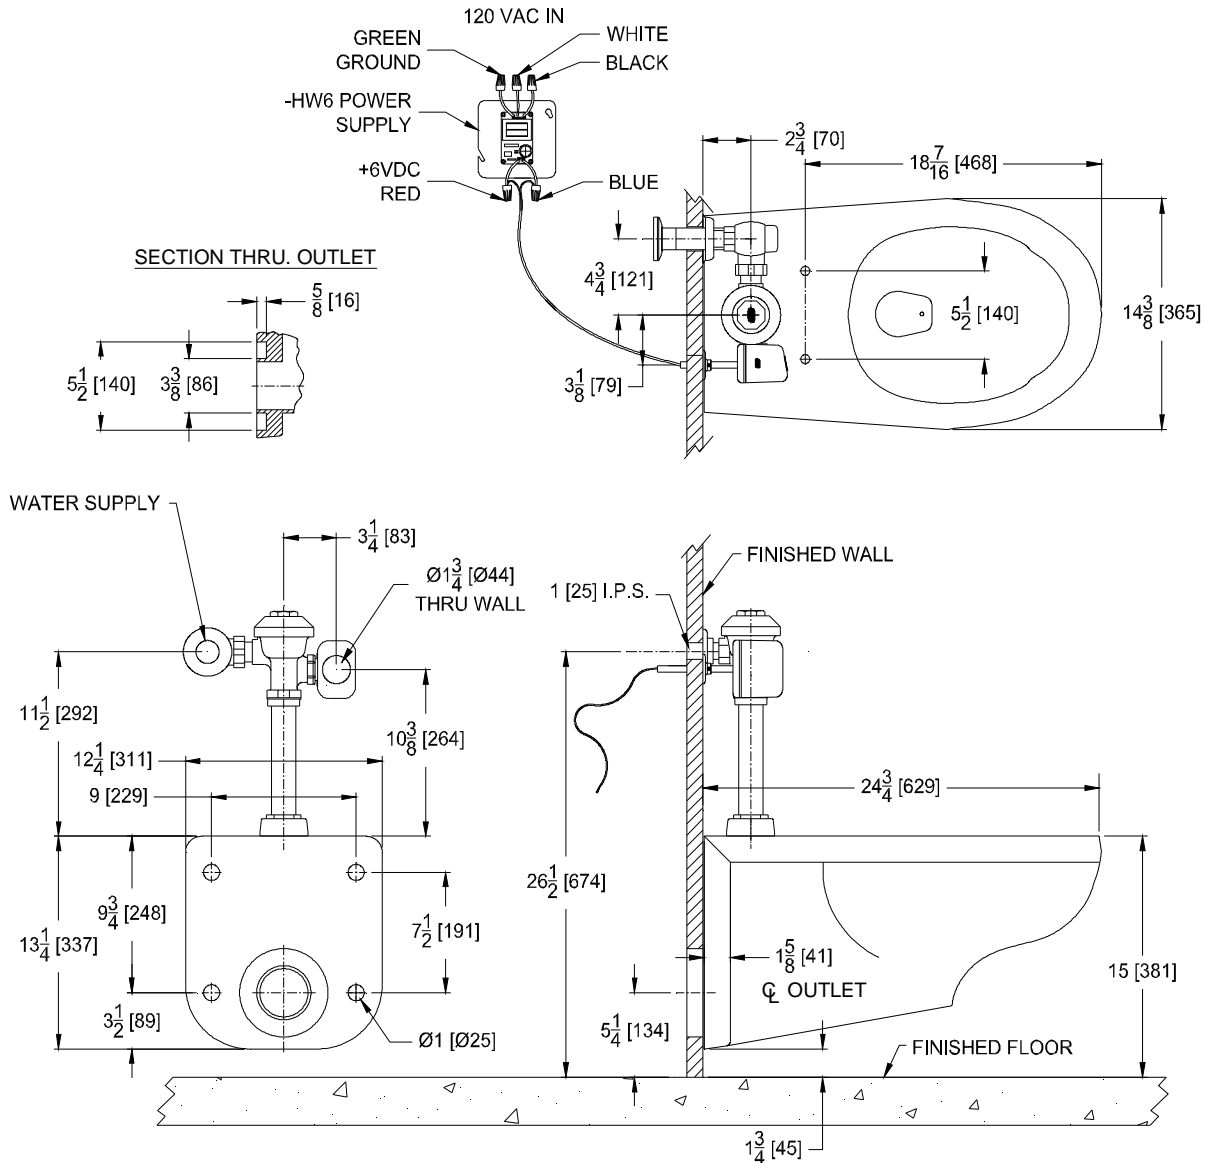

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

In Canada - Consult local codes and standards.

EcoVantage® is a registered trademark of Zurn Industries

All dimensions and specifications are subject to change without notice.



Note: For ADA compliance, rim height should be installed 17" from finished floor.

Zurn Industries, LLC
5900 Elwin Buchanan Drive, Sanford, NC U.S.A. 27330 · Ph. 1-800-997-3876, Fax 919-775-3541

In Canada | **Zurn Industries Limited**
7900 Goreway Drive Unit 10, Brampton, Ontario L6T5W6 · Ph. 905-405-8272, Fax 905-405-1292

www.zurn.com

Rev. -
Date: 2/15/2017
C.N. No. SAN007459
Prod. | Dwg. No. 315914